




250	V
250	V
48	mA
5.5	mA
-7.3	V
11.3	mA/V
38	kΩ
19	

CHARACTERISTICS

78.5	mm	Max. Overall Length
71.5	mm	Max. Seated Height
22.2	mm	Max. Diameter

DIMENSIONS

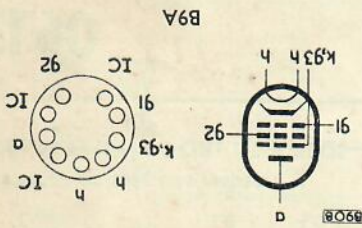

EL84

OUTPUT PENTODE

REPLACEMENT FOR: 6CJ6—Direct.

250	V
250	V
0	V
32	mA
2.4	mA
-38.5	V
4.6	mA/V
5.1	
15	kΩ

CHARACTERISTICS

OUTPUT PENTODE

EL81 (Cont.)

250	V
250	V
48	mA
5.5	mA
5.7	W
4.3	V
10	%
9.5	%
5.0	%
2.0	%

OPERATING CONDITIONS

6.3	V
760	mA
300	V
12	V
300	V
2.0	W
4.0	W
65	mA
100	V

LIMITING VALUES

HEATER

250	V
250	V
48	mA
5.5	mA
5.7	W
4.3	V
10	%
9.5	%
5.0	%
2.0	%

300	V
12	V
300	V
2.0	W
4.0	W
65	mA
100	V

HEATER