

EMM8 Electret Measurement Microphone

iSEMcon EMM8
omnidirectional measurement microphone



User Guide

iSEMcon®

Alexanderstr. 66 • 68519 Viernheim • Germany

Fon. +49 (0) 6204 911 24 91 • Fax. +49 (0) 6204 911 24 90

sales@iSEMcon.com www.iSEMcon.com


Introduction

General Description

The iSEMcon EMM8 is a accurate microphone. It utilizes a small, accurate omni directional capsule, in a carefully crafted, rugged aluminium/steel body. Due to its small diameter (approx. 5/16") and long size (12.4") it has less influence on the sound field. Operating the mic is very simple. Use a good quality, shielded RF phono cable with plugs on both sides and connect the iSEMcon EMM8 to an microphone preamp such as the iSEMcon MP-B which provides bias power with at least 0.5 mA of current available. Adjust the preamp gain to the level required for testing.

Features

- audio frequency range
- low noise
- low power consumption
- less influence on the soundfield for accurate measurements
- rugged anodized aluminium housing with stainless steel front end
- no shock mount needed
- calibration data on disc
- fits to standard mic clamps
- accessories: mic clamp included

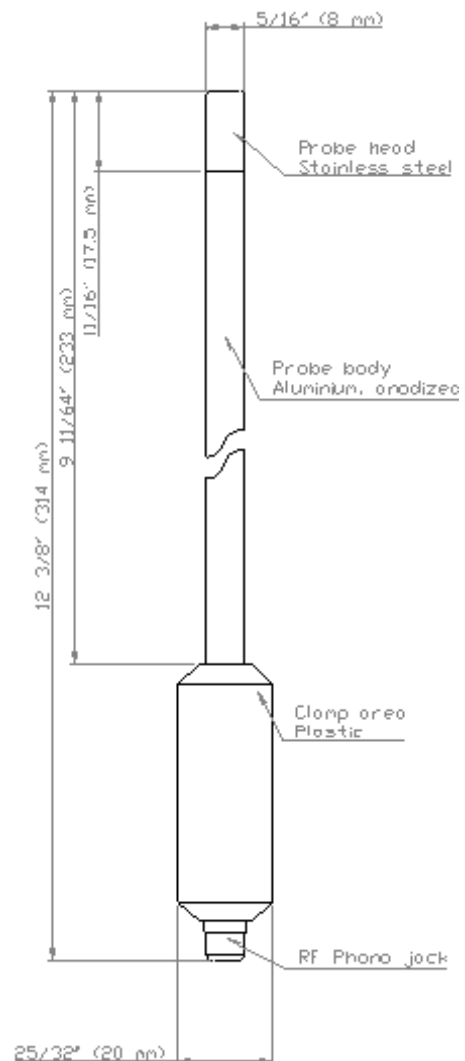

Operational Notes

Why omni


Our goal was to develop an accurate mic at low cost applicable for room acoustic and speaker measurements. It should be as precise as necessary with less coloration on acoustic signals. Therefore we have designed what you see or rather hold in your hands.

A microphone that handles up to 125dBspl and a flat frequency response

The electret microphone

An electret MIC is the best value for money omnidirectional microphone you can buy. Those microphones are used in many applications where small and inexpensive microphones with good performance characteristics are used.

It is a modification of the classic condenser microphone. Whereas a condenser mic needs an applied phantom power, the electret condenser has a build in charge. The bias voltage of about 1.5...10V is needed to supply the built in FET buffer and should be applied using a 1...10kOhm resistor. Normally an electret capsule is a 2 terminal

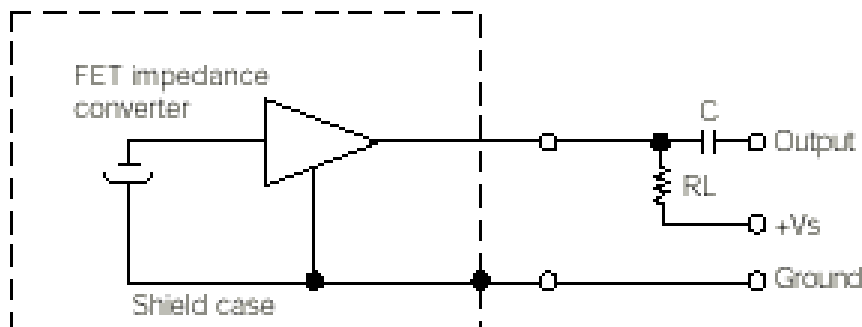


device that works like a current source when biased. The bias voltage should be kept clean, because the noise in this will get to the microphone output.

Appendices

Specifications

on axis frequency response 20 20.000 Hz + 2dB

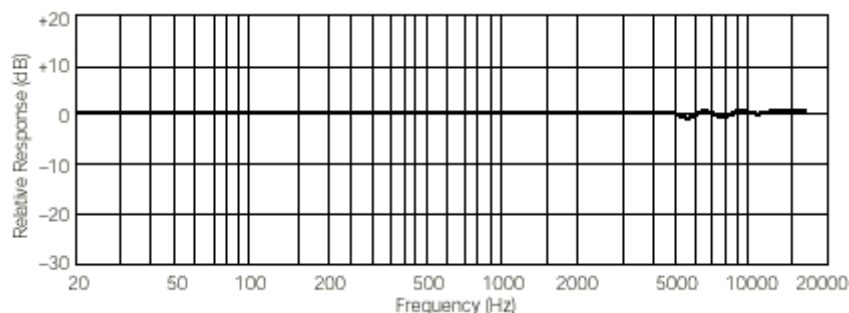

polar pattern (directivity) omnidirectional

Sensitivity 6mV / Pa / 1kHz + 4dB @bias 2.5V , 2.2 kOhm

Power requirements 1.5 10V / approx. 0.5 mA

peak acoustic input > 120 dB SPL

output connector RF RCA jack

Noise S/N ratio >58 dB

dimensions probe dia : approx. 5/16", 8 mm
length : 12 3/8" , 315 mm
max dia : 25/32" , 20 mm

weight	1 1/2 oz, 42 grams (without clamp)
calibration	individually calibrated. The calibration microphone and preamp for this is the Brüel & Kjaer condenser B&K 4133 (1/2" freefield) and B&K 2639 preamp.

Accessories

microphone clamp – please order separately