


Two Fountek FE83 mid-bass drivers, Fs 122 Hz, sensitivity 86 dB, 8 ohm, 12W.
One Vifa OX20SC00 tweeter, Fs 1060 Hz, sensitivity 91.1 dB, 4 ohm, 20W.

The 3/4" tweeter sits in a 1/2" roundover waveguide 0.41" deep for time alignment with the mids.

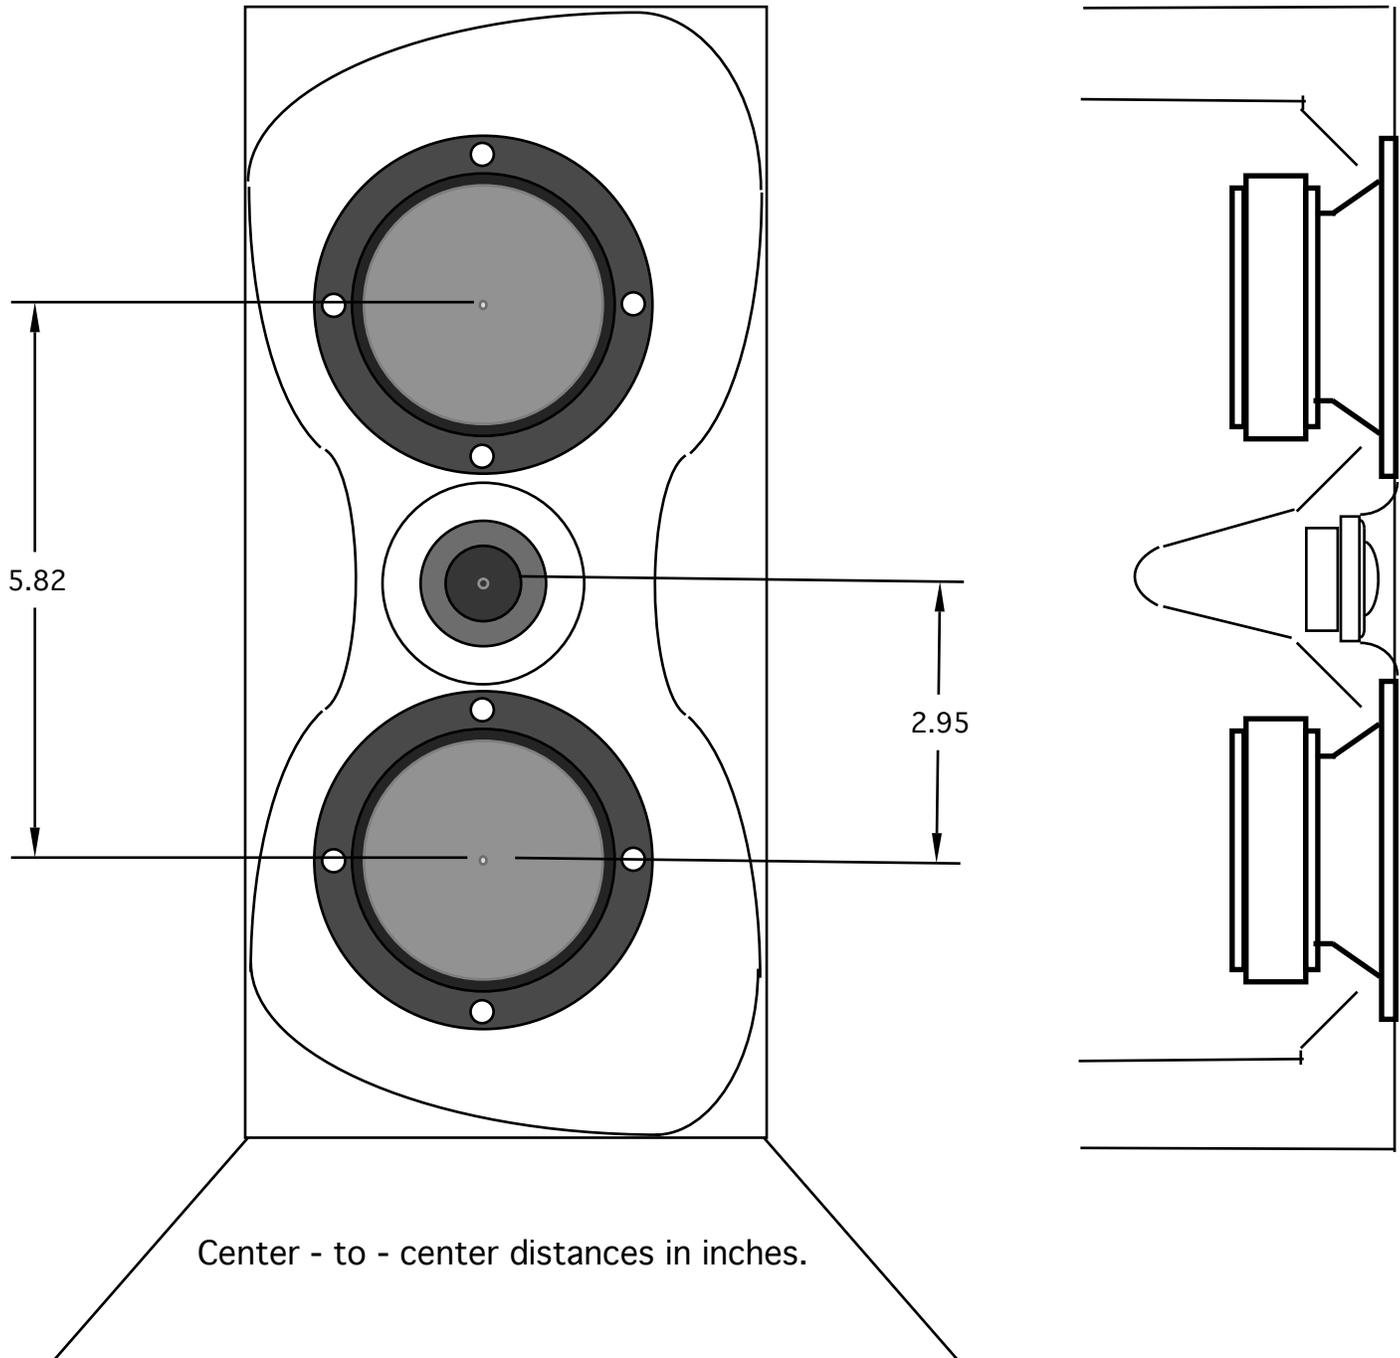

The baffle has an irregular shape to spread the BS frequency out while maintaining the dispersion of a narrow baffle. Edges will all be rounded off. The box behind is a basic rectangle.