

Figure 1 Measured before oscillation encountered, base resistors used.

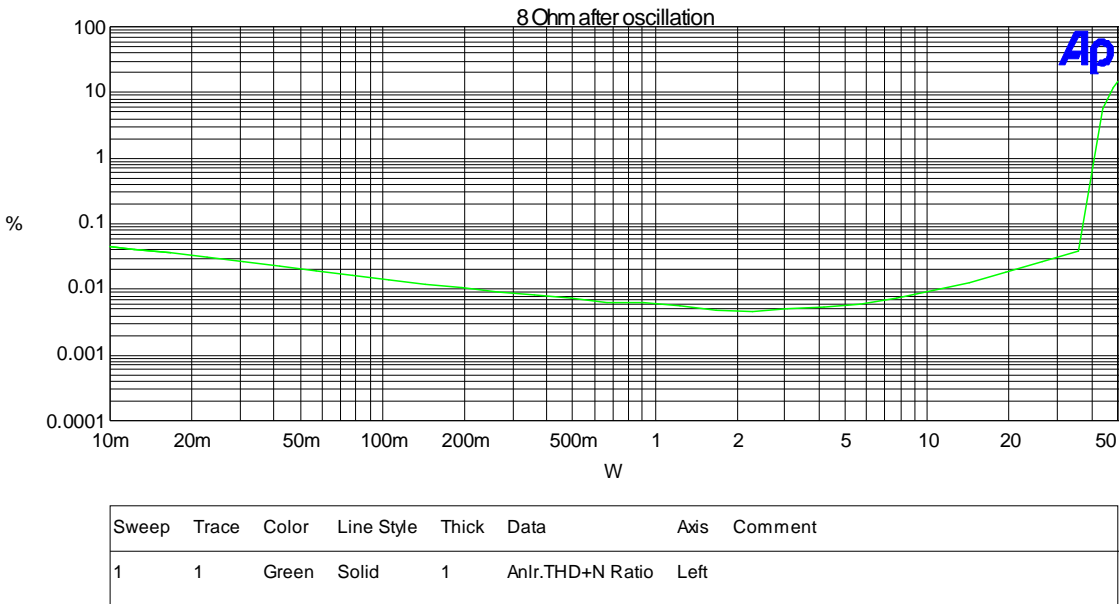


Figure 2 Measured after oscillation occurred, base resistors used.

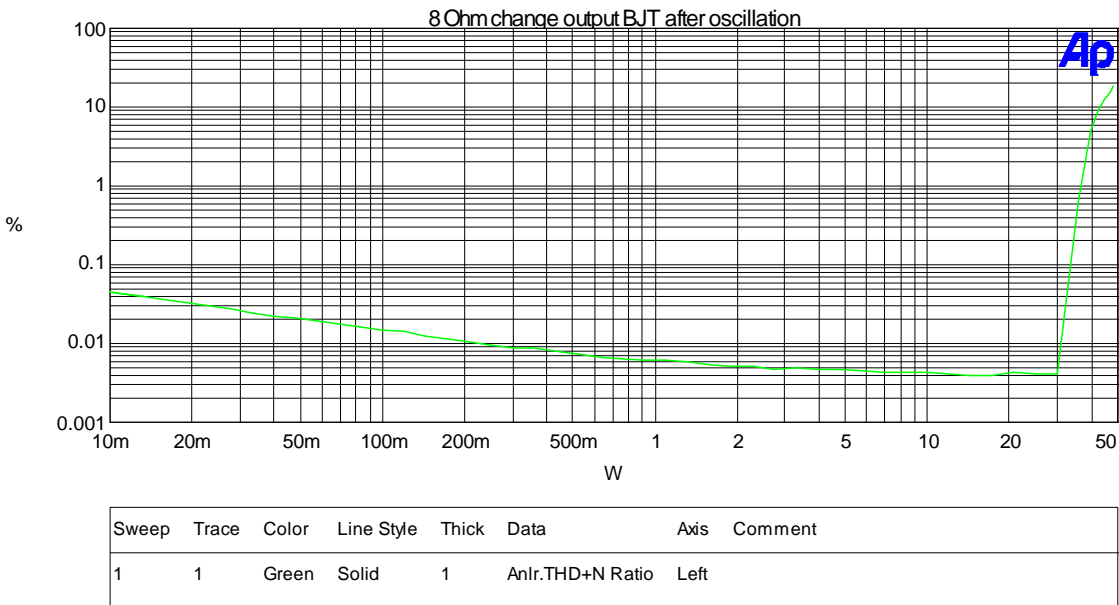


Figure 3 THD vs output power after replacing the output BJT.