




MAINS POWER SWITCH



RAS-PI POWER SWITCH




RAS-PI RES/SHUT SWITCH




Short Push = REBOOT
Long Push = ShutDown
Push again = Boot


IR Receiver



M96-16-SSD1306, etc....
I2C OEL DISPLAY (OPTIONAL)





FTDI TTL-232R-3V3
USB-UART
DEBUG Cable





SOURCE SELECT SWITCH

SOURCE	MIN	MAX
RAS-PI	12	15
Amanero	9	11
S/PDIF	6	8
Analog	3	5
MUTE	0	2

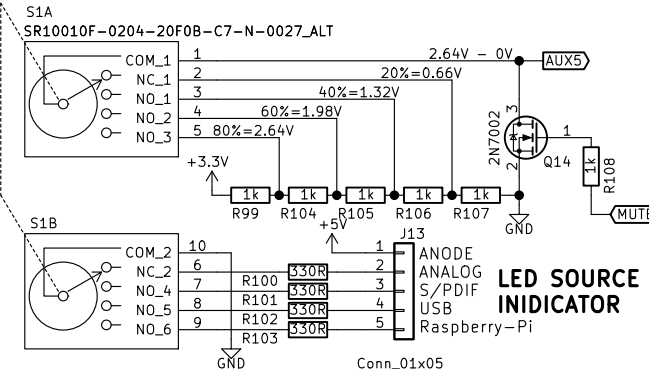

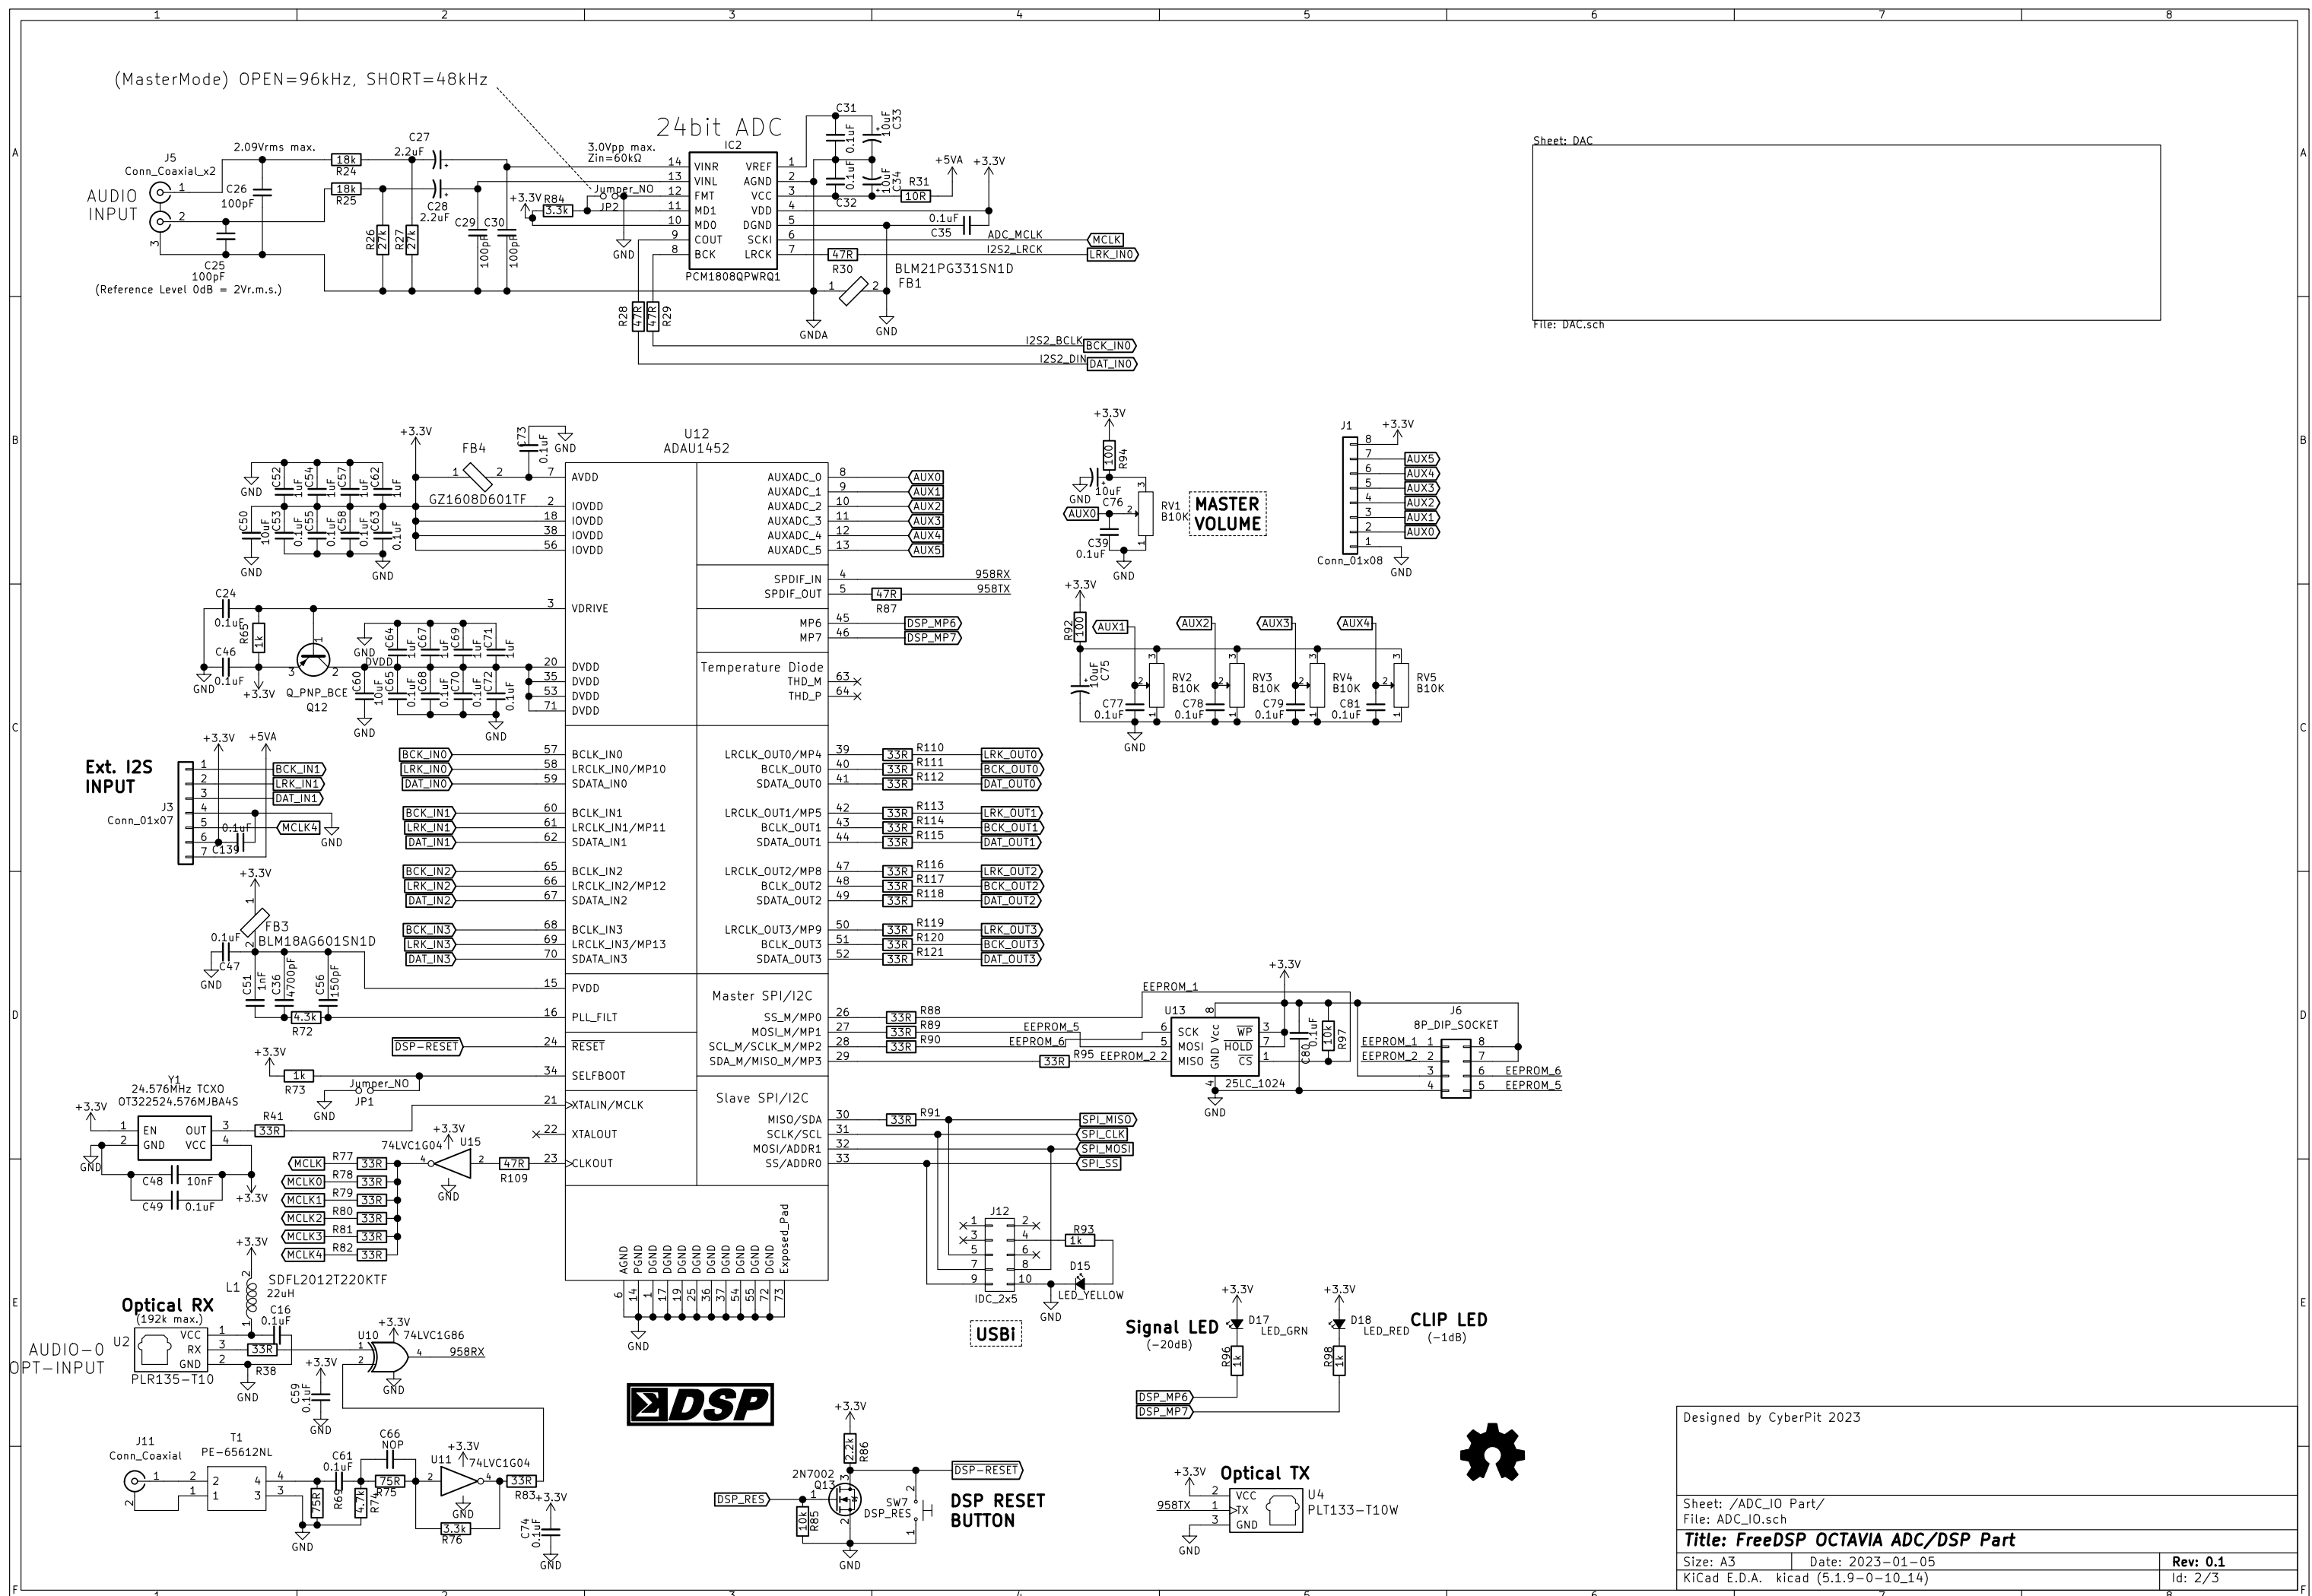

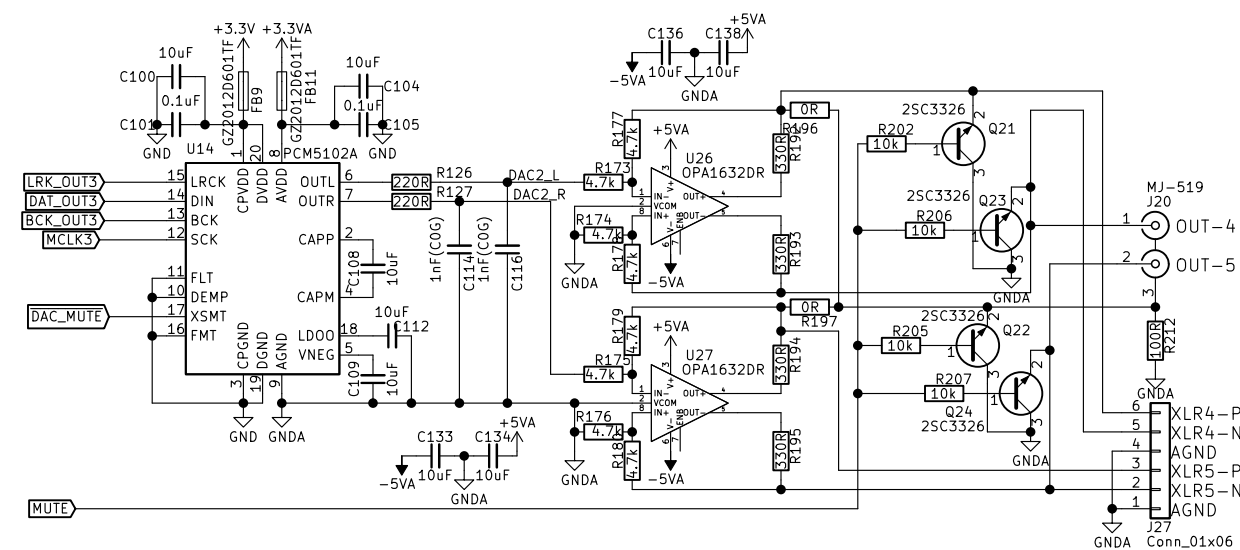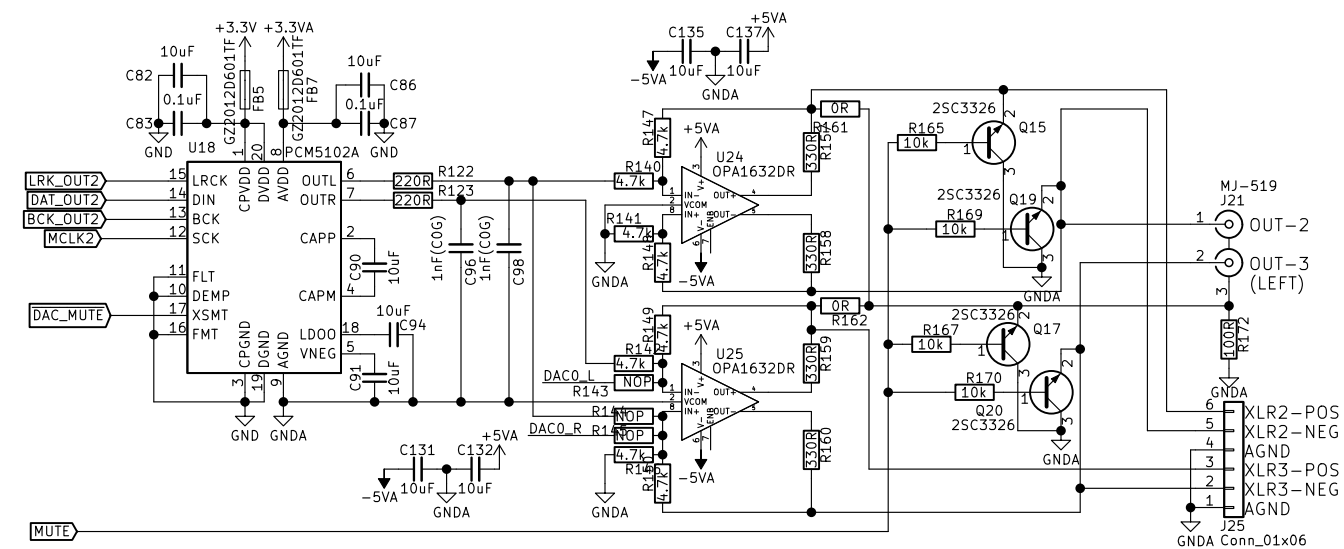

Rev: 0.1

Id: 3/3