


#### NOTES

ALL CAPACITORS IN MICROFARADS  
UNLESS OTHERWISE SPECIFIED.  
ALL RESISTORS 1/2W 10%  
UNLESS OTHERWISE SPECIFIED.

ALL D.C. VOLTAGE MEASUREMENTS  
ARE WITH RESPECT TO GROUND  
AND ARE TAKEN AT 117VAC LINE  
VOLTAGE WITH 8Ω LOAD CONNECTED  
TO OUTPUT AND NO SIGNAL APPLIED  
TO INPUT.

ADJUST EACH OUTPUT BIAS CONTROL  
TO PROVIDE .414VDC AT CATHODE OF  
THE ASSOCIATED TUBE.

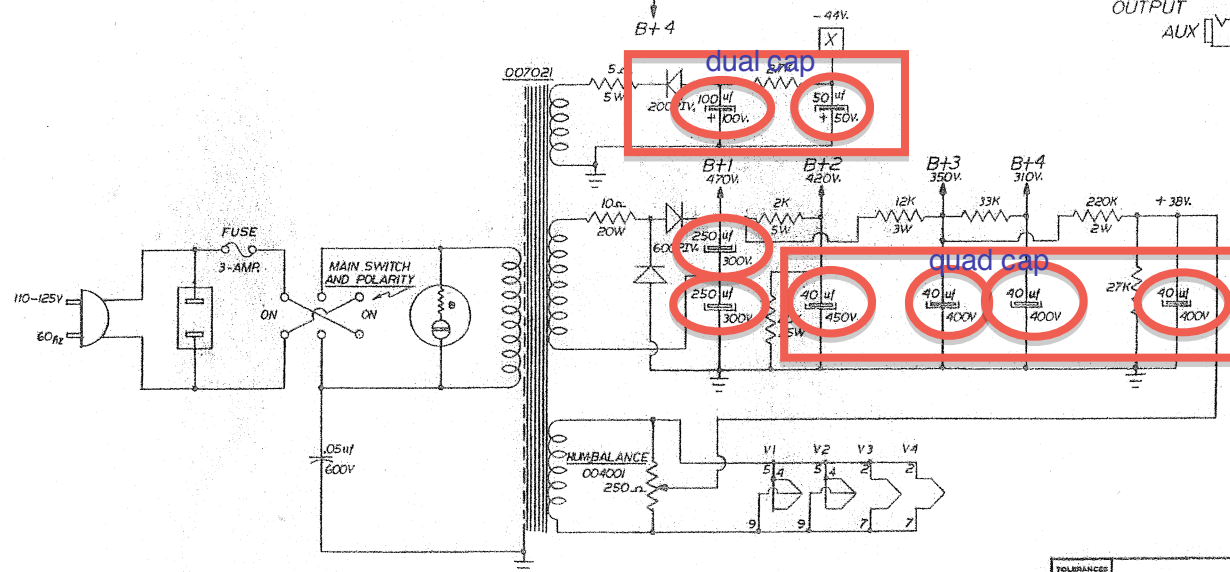

TOLERANCES (EXCEPT AS NOTED)	
RESISTORS	1% 5% 10% 20%
CAPACITORS	5% 10% 20%
WELDS	1/16" 1/8" 1/4" 3/8" 1/2"
DRILLING	1/16" 1/8" 1/4" 3/8" 1/2"
THREADS	1/16" 1/8" 1/4" 3/8" 1/2"
FINISHES	1/16" 1/8" 1/4" 3/8" 1/2"
DATE	7-28-69
DESIGNED BY	THUNDERSTAR BASS
APPROVED BY	