

Digital Isolators:

Either U4 position: IL715-3E (390-1063-5-ND)
Or U3 position :IL715E(390-1062-5-ND)

Other components:

U1,U2:
ADP151AUJZ-3.3 (ADP151AUJZ-3.3-R7CT-ND)
or TPS79333DBVR (296-12961-1-ND)
C3,C6,C7,C10: 10u 1206 MLCC 445-4043-1-ND

C1,C2,C4,C5,C8,C9,C11,C12:
100n 0603 MLCC 445-1316-2-ND

R3,R4: 33ohm*4 YC164J-33CT-ND

R1,R1: 1K 0603


D1,D2: LED 0805

J3,J4,J5,J6,J7J8J9J10: UF.L SOCKETS H11891CT-ND

J11,J12: OPTIONAL PH2.0mm 7P SMD 455-1739-1-ND

J1,J2 PH2.0mm 2P 455-1734-2-ND

Title			
UNIVERSAL GALVANIC ISOLATION ADAPTER OF I2S/DSD BOM			
Size	Document Number		Rev
A	Design by Ian iancanada.mail@gmail.com		1.0
Date:	Tuesday, February 18, 2014		Sheet 1 of 2

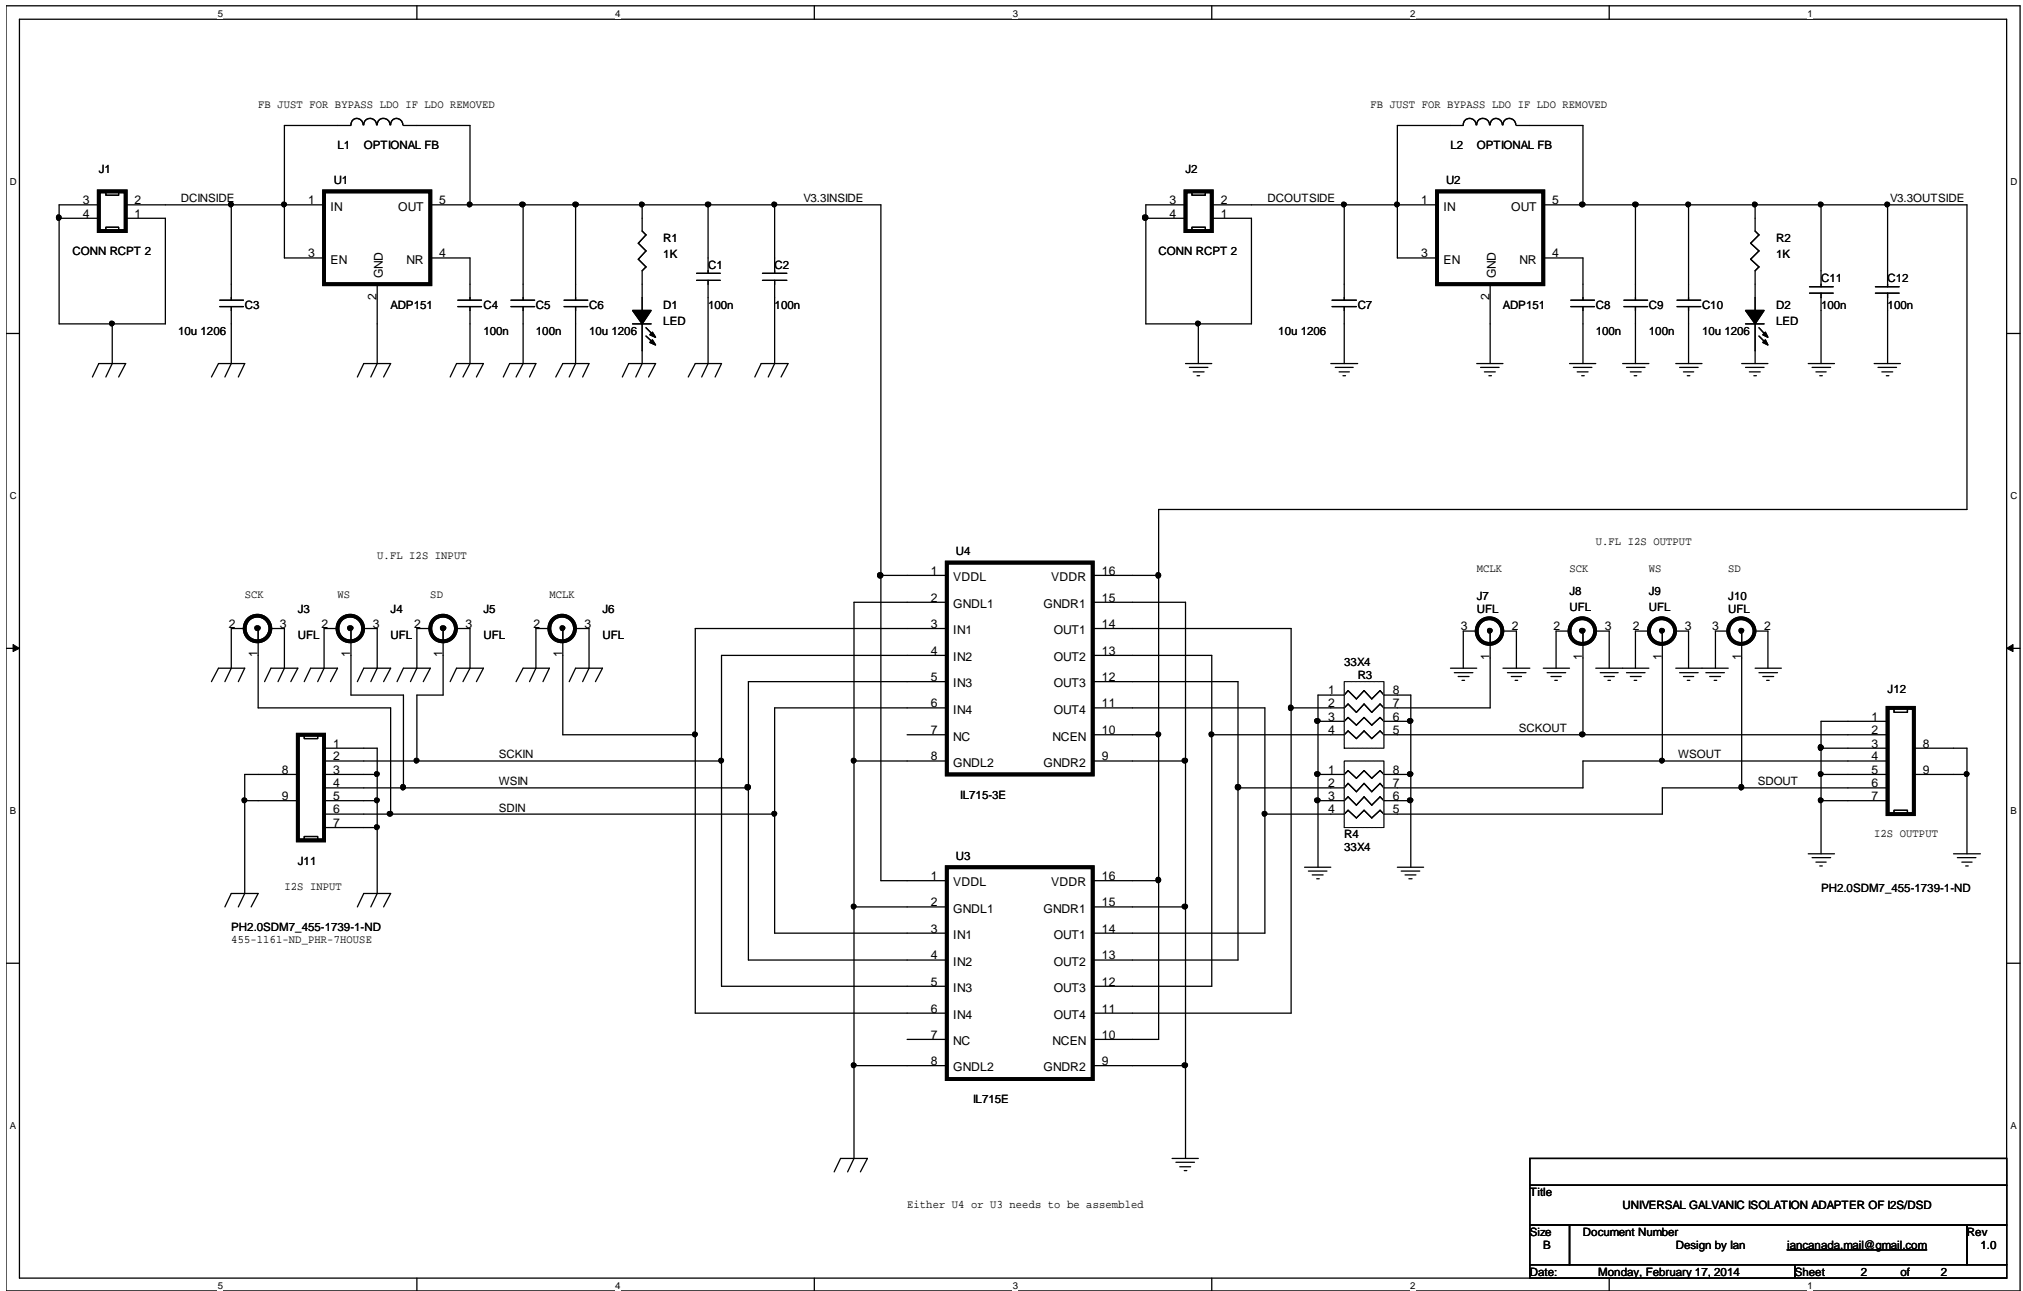

Title			
UNIVERSAL GALVANIC ISOLATION ADAPTER OF I2S/DS			
Size B	Document Number	Design by Ian	iancanada.mail@gmail.com
Date:	Monday, February 17, 2014	Sheet	2 of 2