


2 1/2 A MIL FOR 200 220 240V  
 Δ DELETE FOR 100V, 2K, 7W-200V, 2.4K 10W-220V, 2.7K 10W-240V  
 CAPACITOR VALUES IN μF UNLESS MARKED OTHERWISE  
 RESISTOR TOLERANCES ARE ±5% UNLESS OTHERWISE SPECIFIED  
 \* TRANSFORMERS WITH BUILT IN 139° THERMAL FUSE

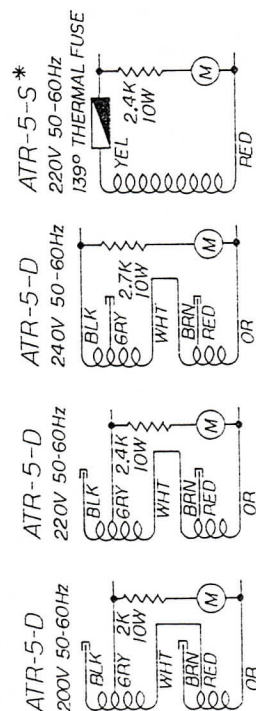

DATE 8-25-82	SUMO ELECTRIC CO. LTD.			
	MODEL NINE PLUS-DUAL DIFFERENTIAL CLASS 'A' POWER AMPLIFIER			
	DRAWN <i>WJ</i>	APPR <i>WJ</i>	REVISION E	DATE 4-4-85