


1 2 3 4 5 6 7 8 9 10 11

A B C D E F G H

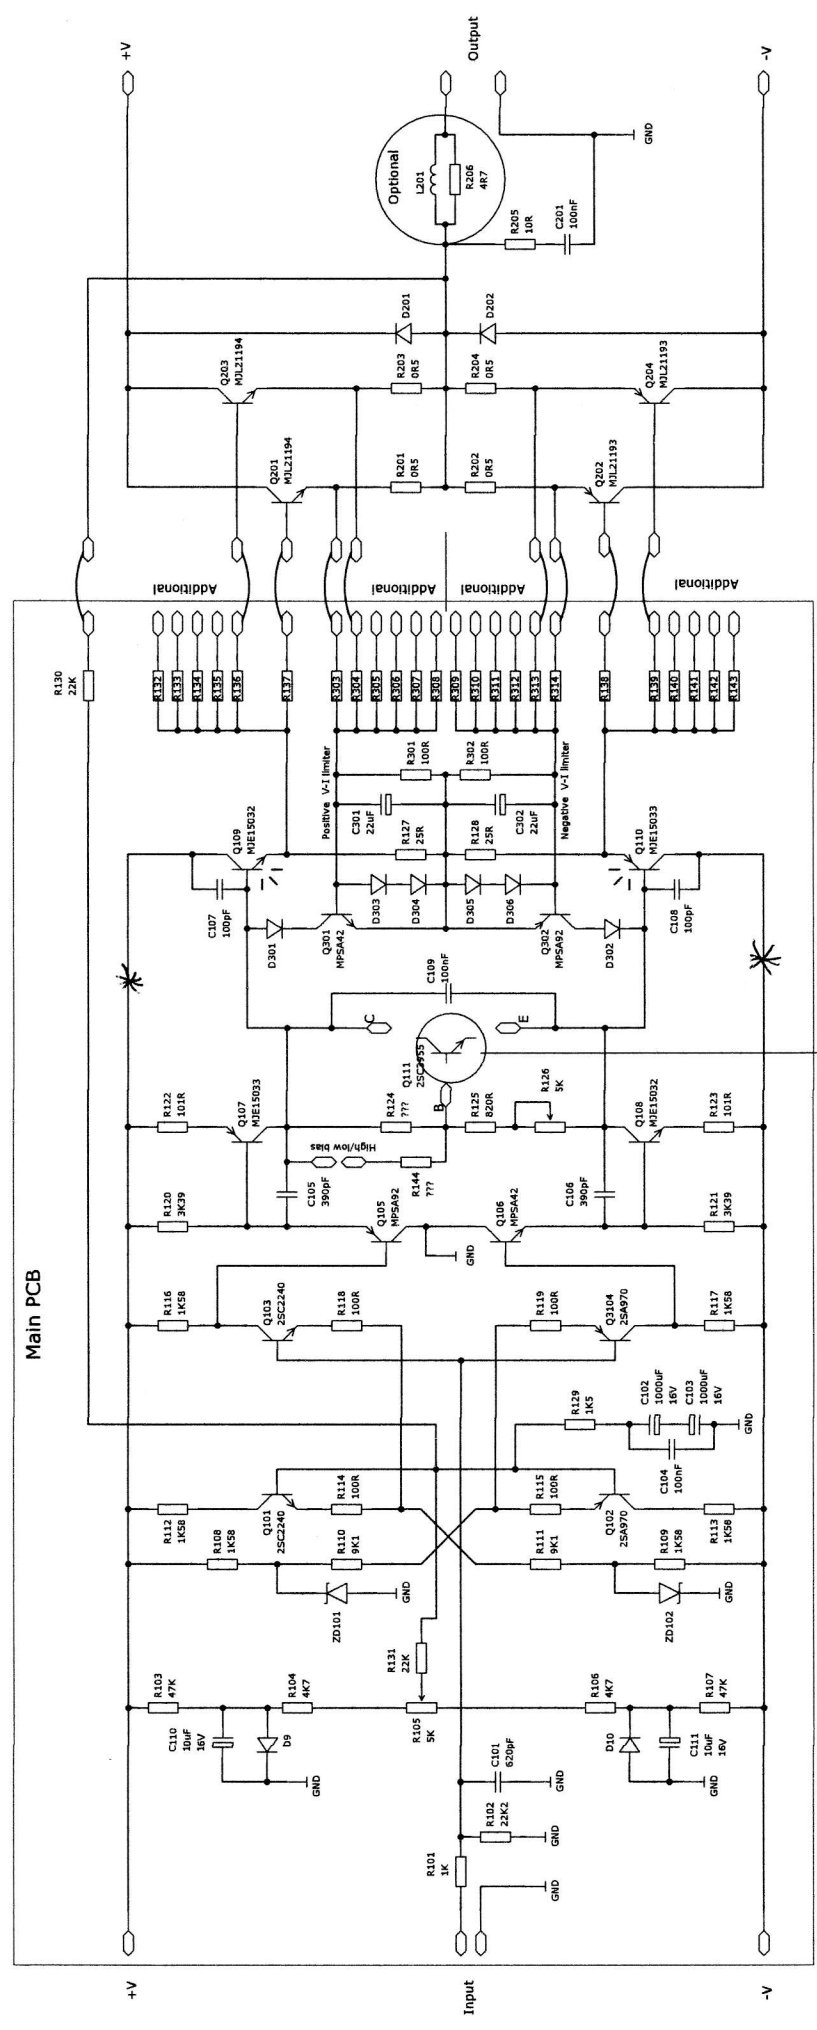

Fitted on main heatsink

**Notes!**  
 Components designated 1xx are placed on main PCB  
 Components designated 2xx are placed on heatsink or speaker binding posts  
 Components designated 3xx are additional output protection circuit  
 All capacitors 100V except where designated otherwise  
 Q107 and Q109 are placed on main heatsink  
 Q132 to R143 use 238040 (R305/R306/R307/R308) = app. 100R for safe SOA  
 V-Limiter: 1. (R305/R306/R307/R308) = app. 100R for safe SOA  
 - same calc. goes for R309 to R314

Copyright		File Name		Krell-Clone KSA-50.sch	
Project		Date		Date	
R&D		17.10.2004		21.10.2004	
Design Name		Rev.		Rev.	
A3		1.1		1.3	
UR		1.2		1.3	
IP		1.3		1.3	
1 of 1		1 of 1		1 of 1	

DELTA AUDIO DENMARK  
 www.delta-audio.com

Krell-Clone KSA-50  
 Krell KSA-50 Clone