



J2080

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Recommended Amp Power: 10W to 125W
- Frequency Response: 40 Hz to 23 kHz (-6 dB)
- Sensitivity: 89 dB SPL*
- Crossover Frequencies: 3.5 kHz

SYSTEM COMPONENTS:

- Cabinet: CJ2080
- Grille: GJ2080
- Low Frequency Transducer: 508G 8 in. (200mm) High Polymer Laminate
- DC Resistance: 5.9 ohm \pm 10% Copper Wire

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 74447 (14mm) Pure Titanium Dome Transducer
- DC Resistance: 8.0 ohm \pm 10% Copper Wire
- Crossover Network: NJ2080

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 6.0V Input, 20 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 6.0V Input, 20 Hz to 3.5 kHz
- C. H.F. Aural Sweep Test: 2.83V Input, 2 kHz to 20 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 22.5 x 11.0 x 10.0 in. D (572mm x 280mm x 254mm D)
- Shipping Weight: 20 lbs. (9.0 kg.)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt (2.83 V RMS) @ 1 Meter

PACKAGE

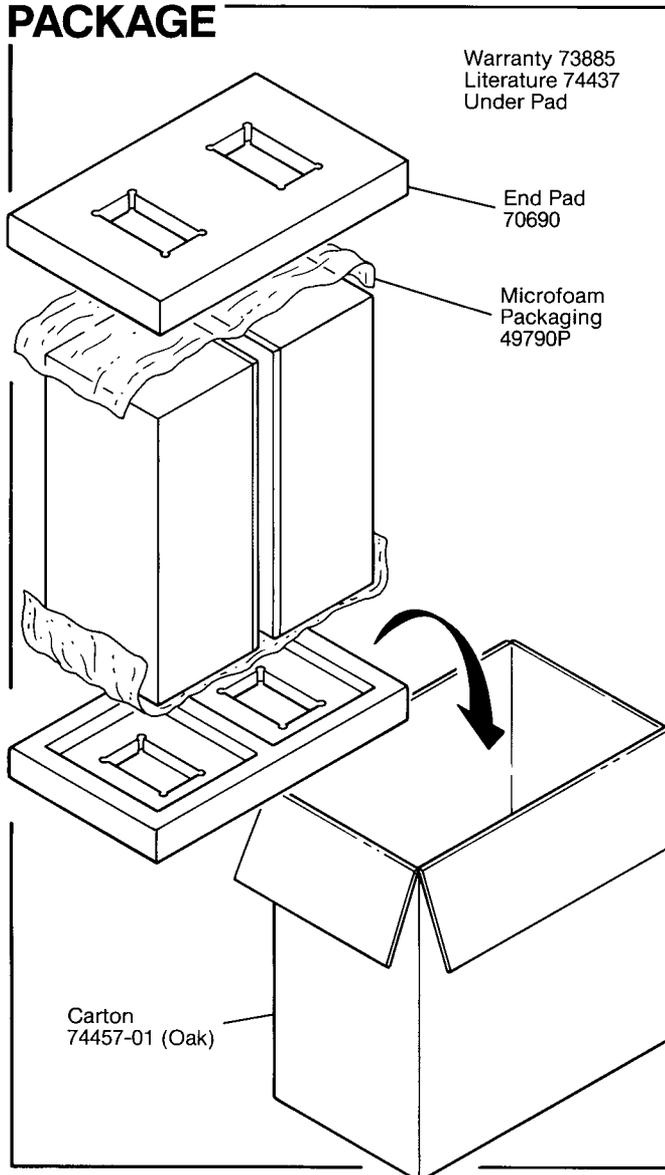


WIRING DIAGRAM

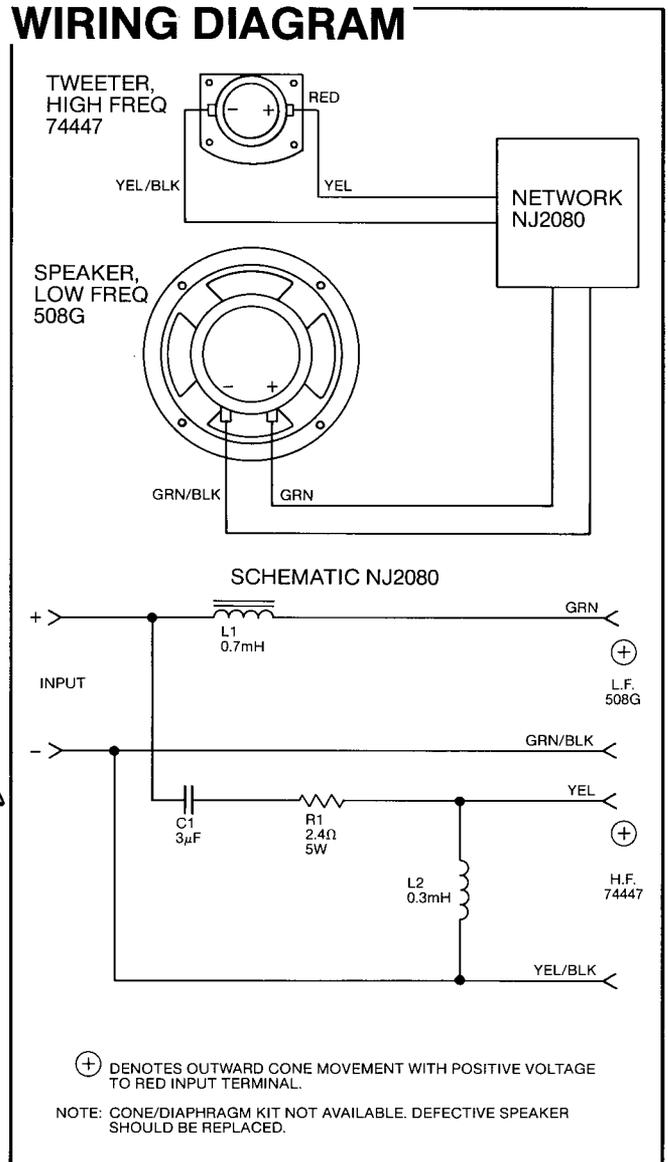

J2080

J2080

COMPONENT EXPLODED VIEW

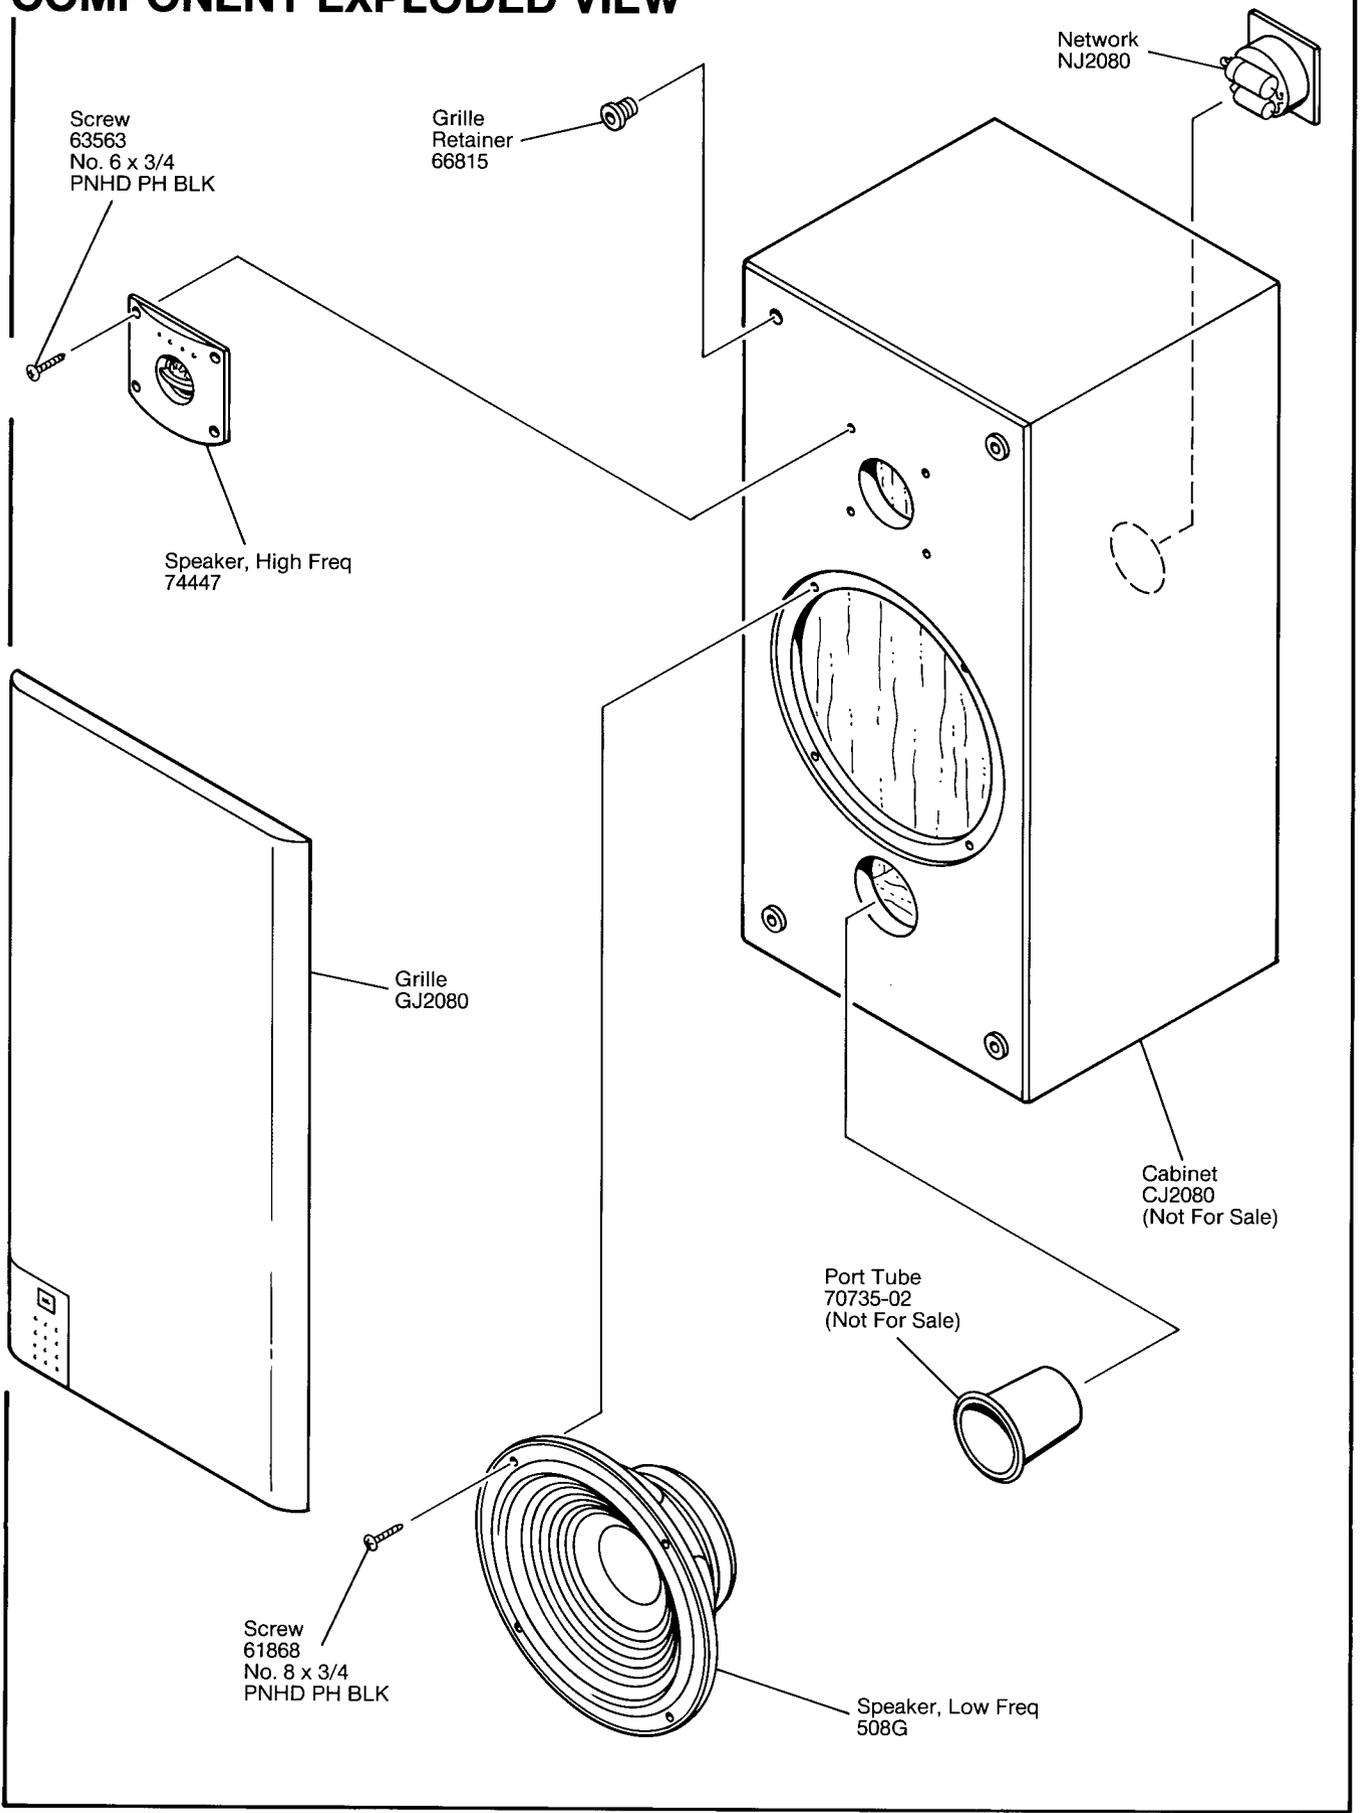

J2080