


0.001% 1kTHD @ 100W
0.01% 20kTHD @ 100W
H2-dominant

FR#-3dB DC - 90kHz
Full-power bandwidth 250kHz
Slew rate 150 V/#uSec

A#OL 90dB
A#CL 26dB
Stability margins 60°, 9dB

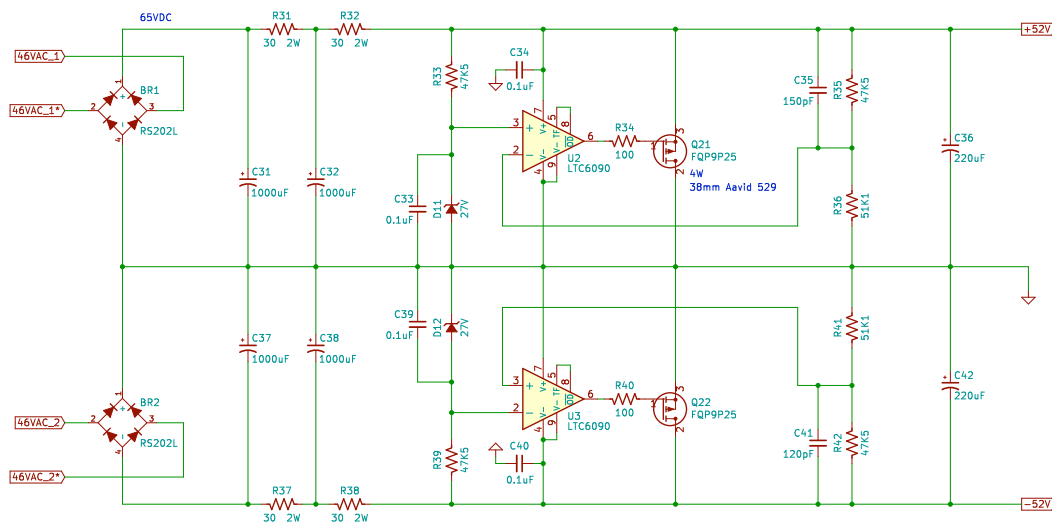

Attenuation (1Hz-1MHz) 130dB
Residual ripple < 50uV@20kHz
Output impedance 5mΩ
Stability margins 65°, 30dB

R21/22/23 400mW nominal
Q22 4W nominal, 6W no load

Transformer (per channel):
120VA
2 x 46V

Jeff Young

Sheet: /
File: SixPack FE.sch

Title: Jam Jar 'CFA' Lateral Driver

Size: A3 Date: / /
KiCad E.D.A. kicad (5.99.0-582-ge85701f40)

Rev: /
Id: 1/1