



QUARTZ PLL DIRECT DRIVE TURNTABLE

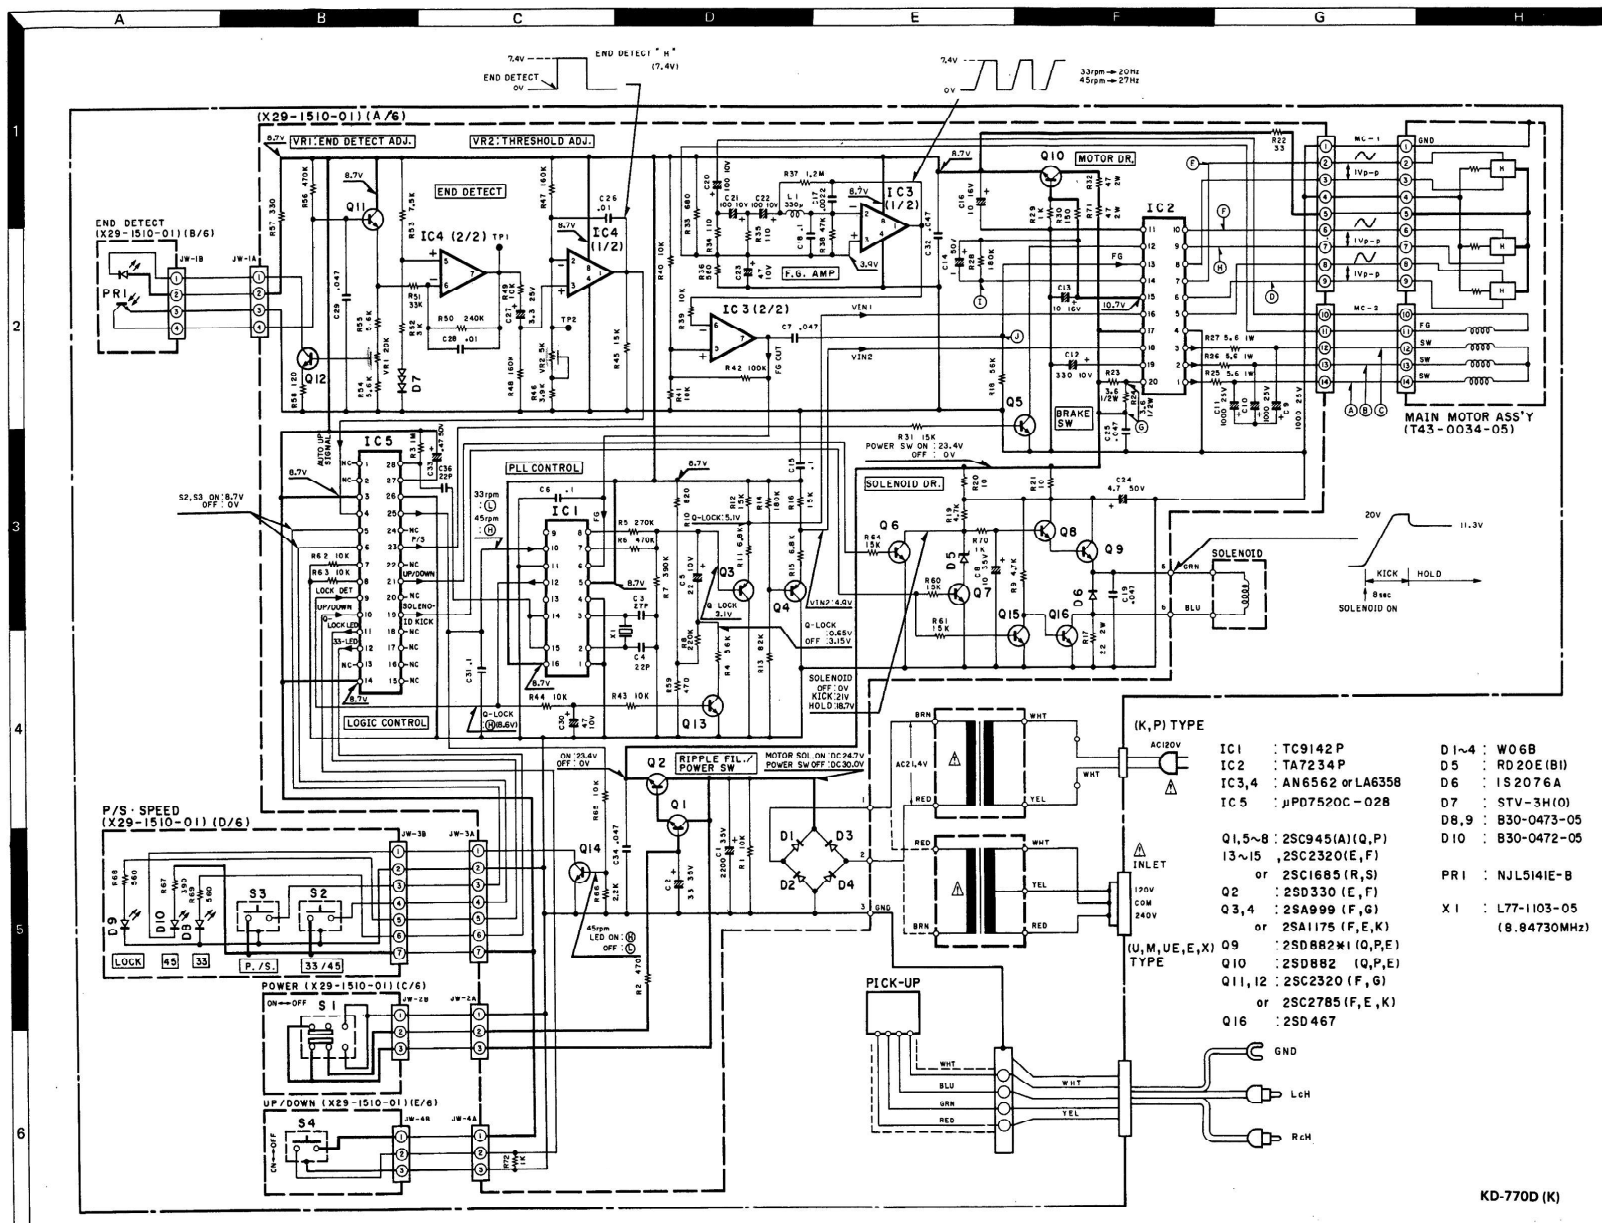

Specifications

Motor and turntable

- Drive System**..... Direct-drive system
Motor..... Quartz PLL core & slotless DC servo motor
Turntable Platter..... 33 cm (13") diameter
 Aluminum alloy, Die-cast
Speeds..... 2 speeds, 33-1/3 and 45 rpm
Wow & Flutter..... Less than 0.02% (VVRMS)
 Less than 0.008% (Readout Direct)
 Less than 0.03% (DIN)
Rumble..... DIN weighted better than -80 dB
 DIN unweighted better than -55 dB

Tonearm

- Type**..... Static-balance type. Straight tubular arm
Effective Tonearm Length..... 245 mm (9-5/8")
Overhang..... 15 mm (9/16")
Tracking Error..... +1.8° to -1.0°
Tracking Force Range..... 0 to 3 grams (0.1 g step)
Usable Cartridge Weight..... 2.0 to 12 grams (with supplied head-sholl)

Miscellaneous

- Power Requirements**..... AC 120 V, 60 HZ: U.S.A. and Canada
 Models,
 AC110-120/220-240 V, 50/60
 Hz (Switchable): Other countries
Power Consumption..... 22 watts
Dimensions..... W 490 mm (19-5/16")
 H 162 mm (6-3/8")
 D 410 mm (16-5/32")
Weight..... 11.7 kg (25.7 lb)
Supplied Accessory..... 45 rpm adaptor,
 Hexagonal bar wrench

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

DC voltages are as measured with a high impedance voltmeter at 33-1/3 r.p.m. mode. Values may vary slightly due to variations between individual instruments or/and units.

KD-770D (K)

