


1 2 3 4 5 6 7 8 9 10 11

A B C D E F G H

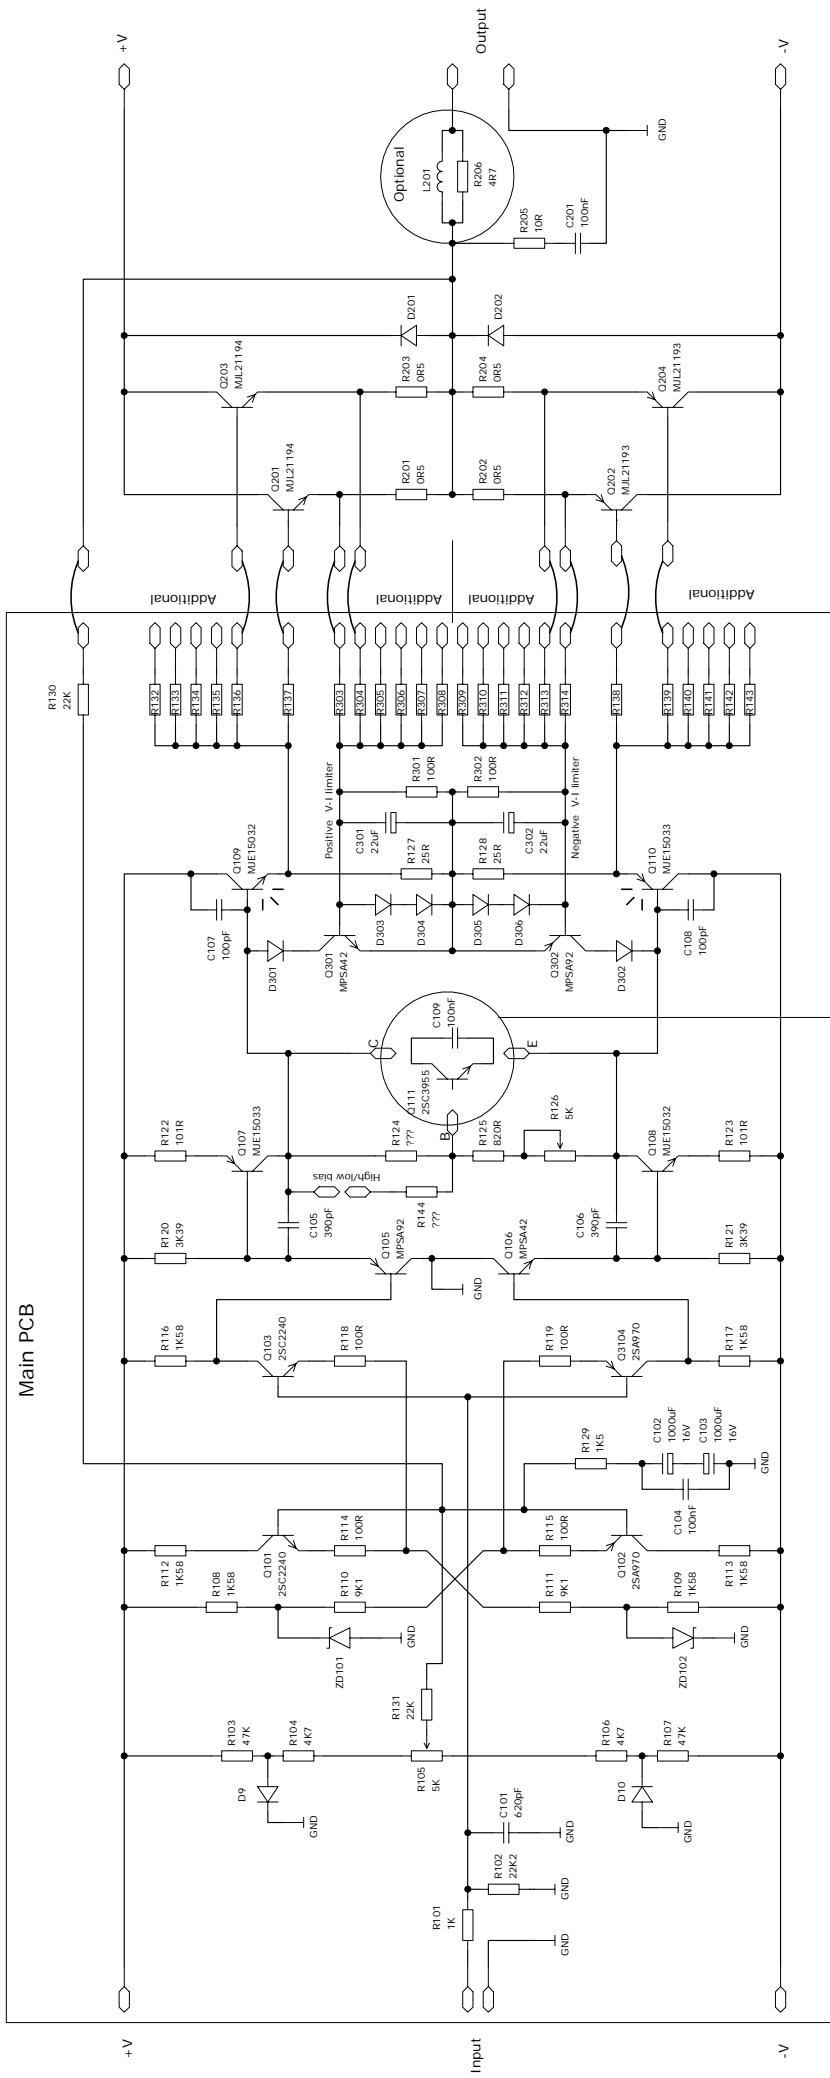

Fitted on main heatsink

Notes!
Components designated 1xx are placed on main PCB
Components designated 2xx are placed on heatsink or speaker binding posts
Components designated 3xx are additional output protection circuit
All capacitors 100V except where designated otherwise
Q111 and C109 are placed on main heatsink
Q107 and Q108 must be fitted with suitable heatsink
R132 to R143 use 2.2 to 10 Ohms
V-I Limiter: 1: (R303/R304/R305/R306/R307/R308) = app. 100R for safe SOA
- same calc. goes for R309 to R314

DELTA AUDIO DENMARK		Krell-Clone KSA-50		Krell-Clone KSA-50 Clone	
www.delta-audio.com		R&D		A3	
Project		JD		UR	
Size		Code		Status	
Sheet		1 of 1		1 of 1	

Krell-Clone KSA-50.sch		Date		Date	
Rev.		Rev.		Rev.	
1.1		1.2		1.2	
17.10.2004		21.10.2004		21.10.2004	
17.10.2004		21.10.2004		21.10.2004	
17.10.2004		21.10.2004		21.10.2004	