


1 2 3 4 5 6 7 8 9 10 11

A B C D E F G H

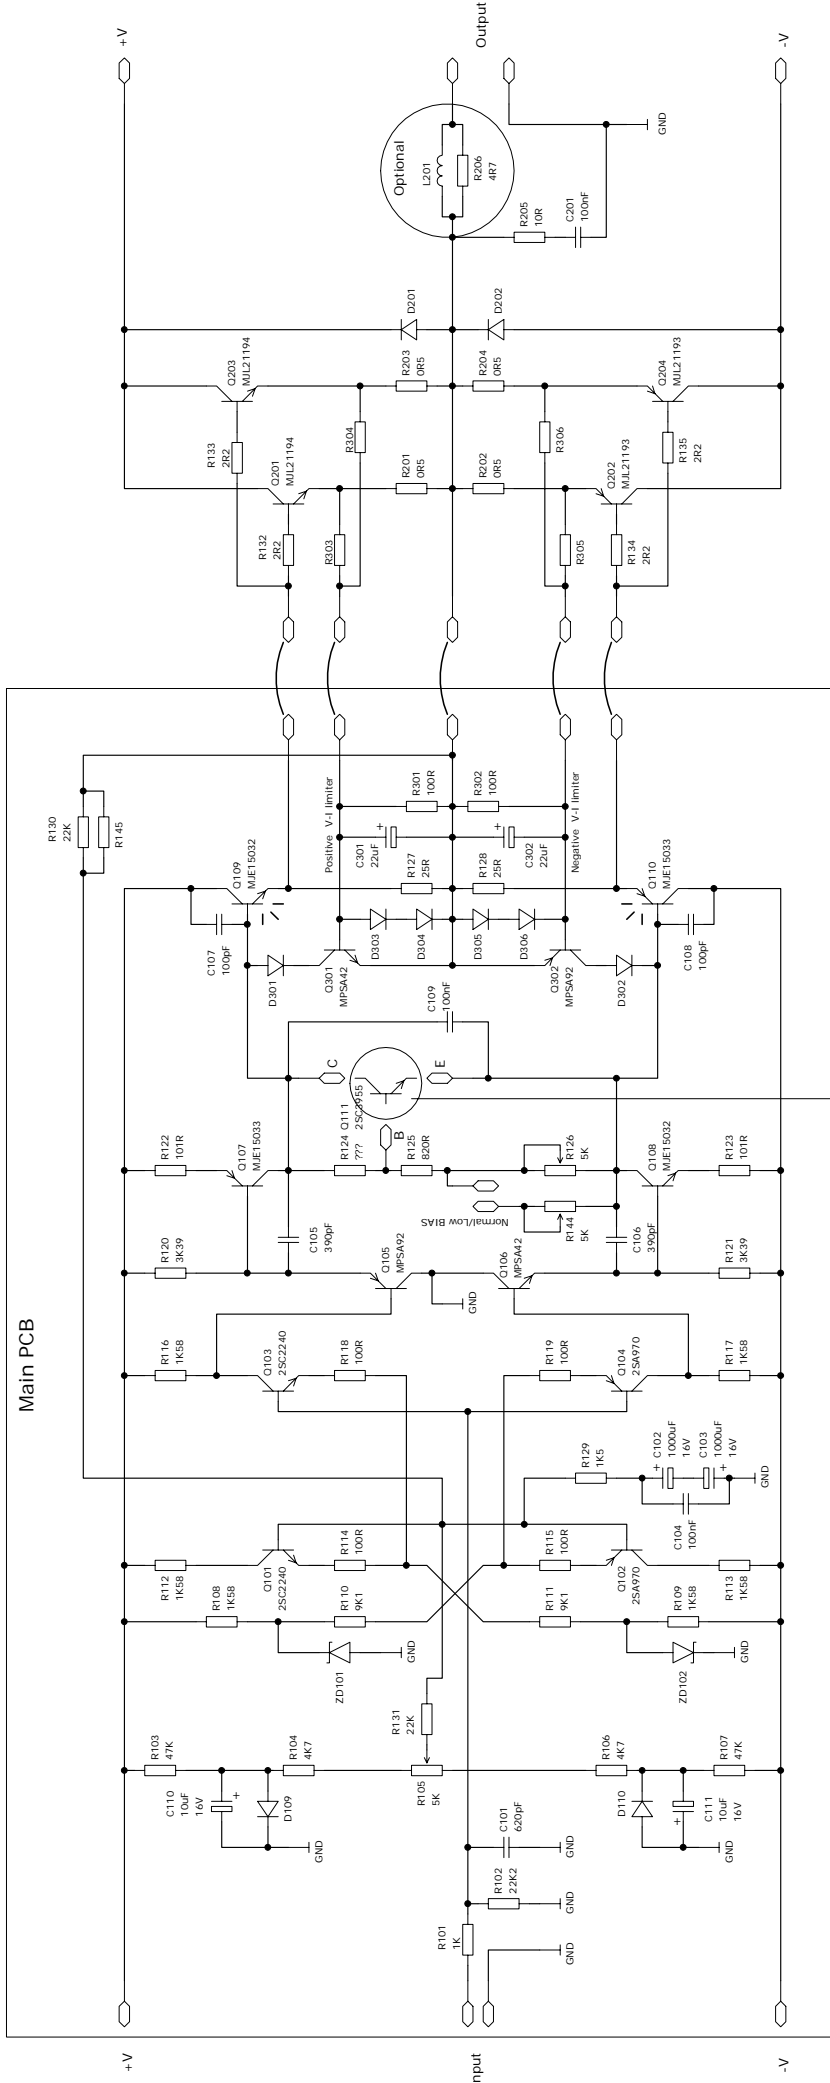

Notes!
Components designated 1xx are placed on main PCB
Components designated 2xx are placed on heatsink or speaker binding posts
Components designated 3xx are additional output protection circuit
All capacitors 100V except where designated otherwise
Q111 must be placed on main heatsink
Q109 and Q110 must be fitted with suitable heatsink
V-I Limiter: 1: (R303/R304/Rxxx) = app. 100R for safe SOA

DELTA AUDIO DENMARK				Krell-Clone KSA-50				Krell-Clone KSA-50.sch			
www.delta-audio.com				Project				Rev Name			
				R&D				Date			
				A3				17.10.2004			
				Code				Rev			
				Size				21.10.2004			
				Status				Rev			
				UR				1.1			
				JD				1.2			
				Checked				1.3			
				Released				23.10.2004			
				Rev				1.4			
				Sheet				1 of 1			