


50Watt

+35 to +50V

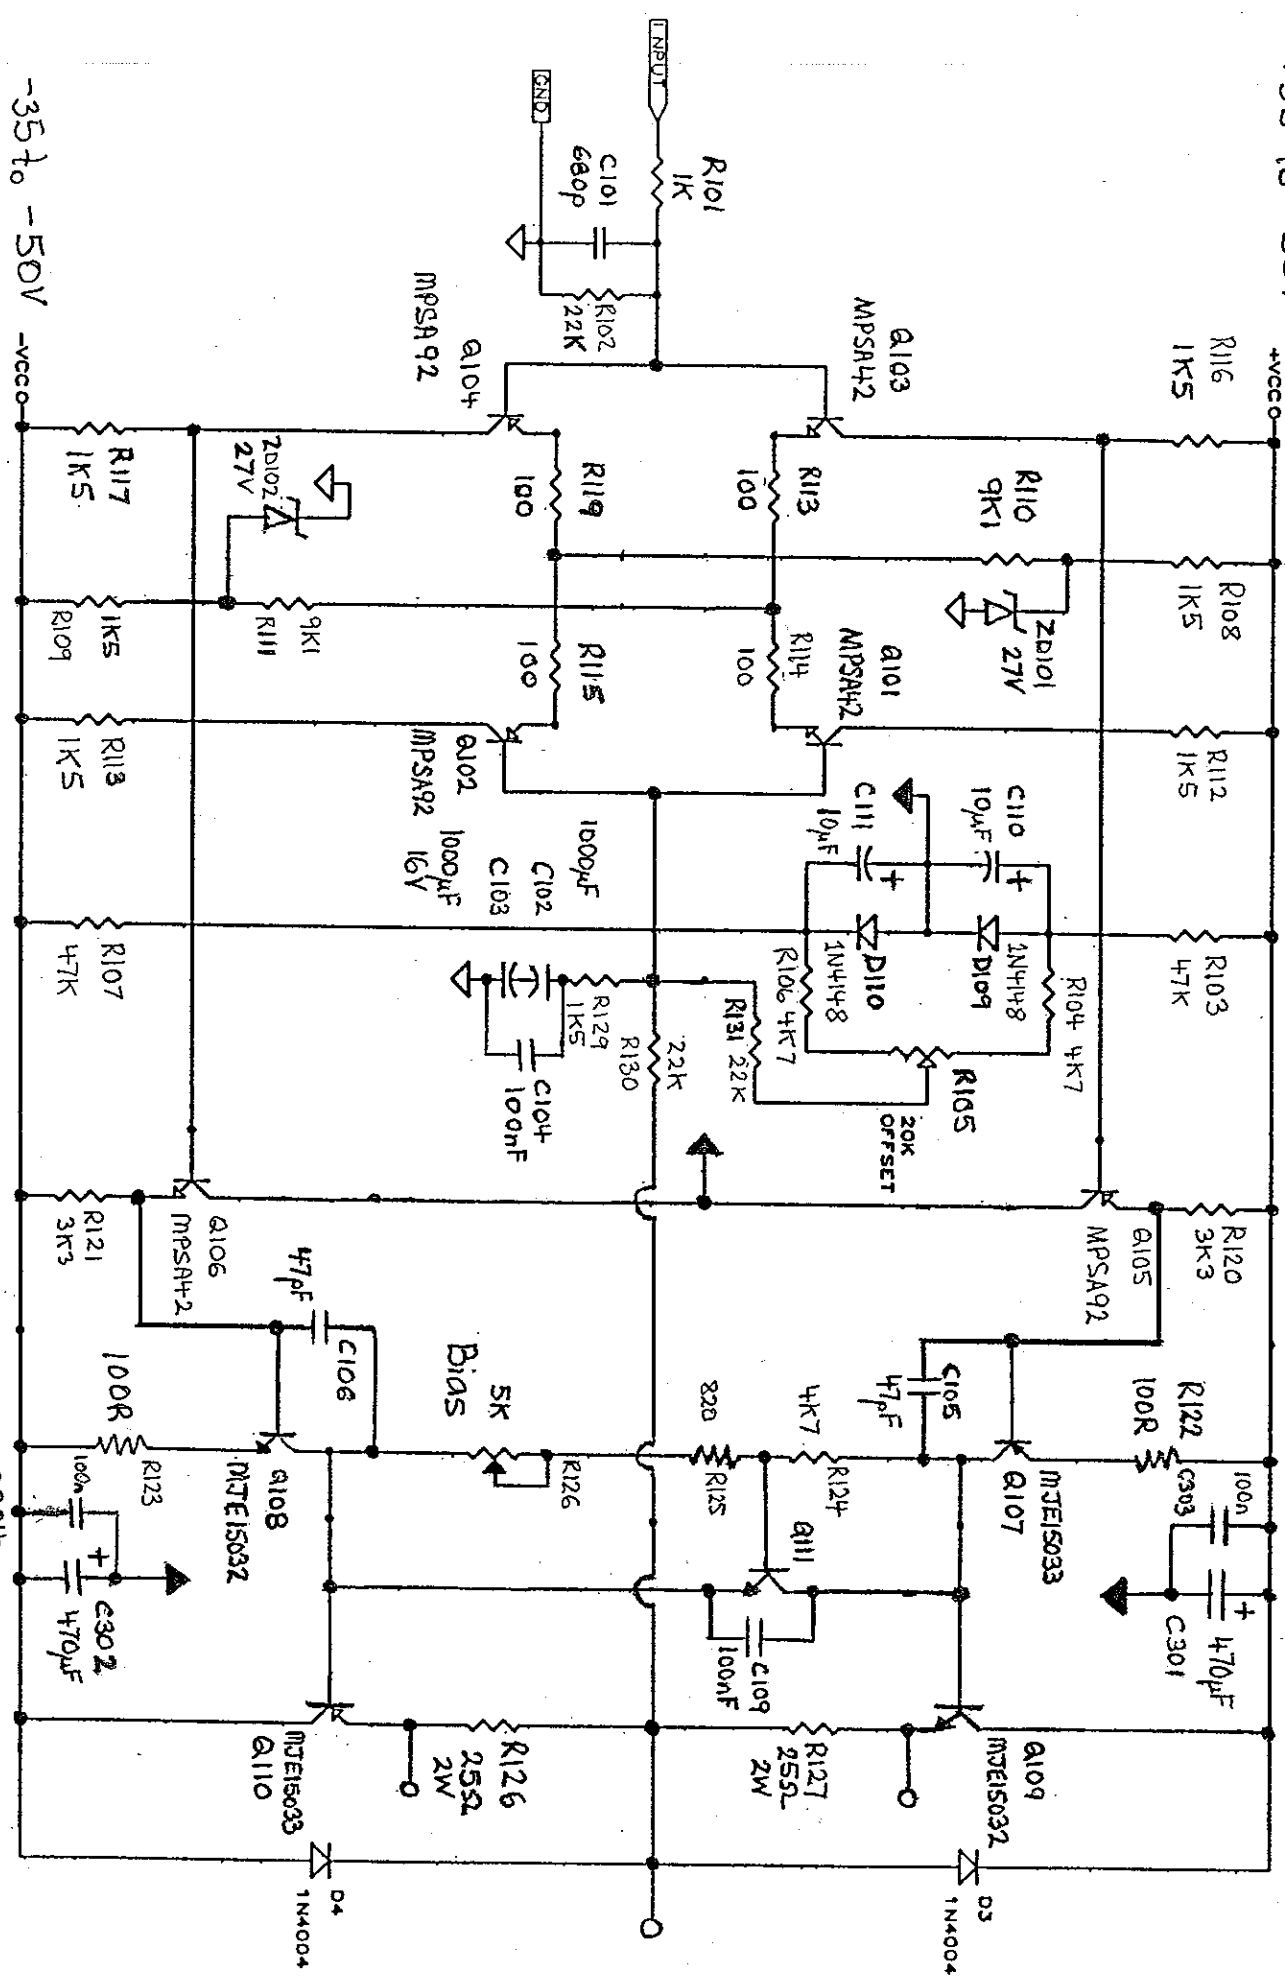

-35 to -50V

- NOTES: 1) BIAS: ADJUST R24 FOR 620 mV ACROSS OR88 OHM EMITTER RESISTORS.
 2) OFFSET: SHORT INPUT. ADJUST R19 FOR 0mV OUTPUT. OFFSET TOLERANCE: 30mV