


Preferably balanced input is used.
Then R3 is disconnected from PCB
Pin 3 of J3 is connected to GND
of the signal source.
Signal input to pin 2 as usual.

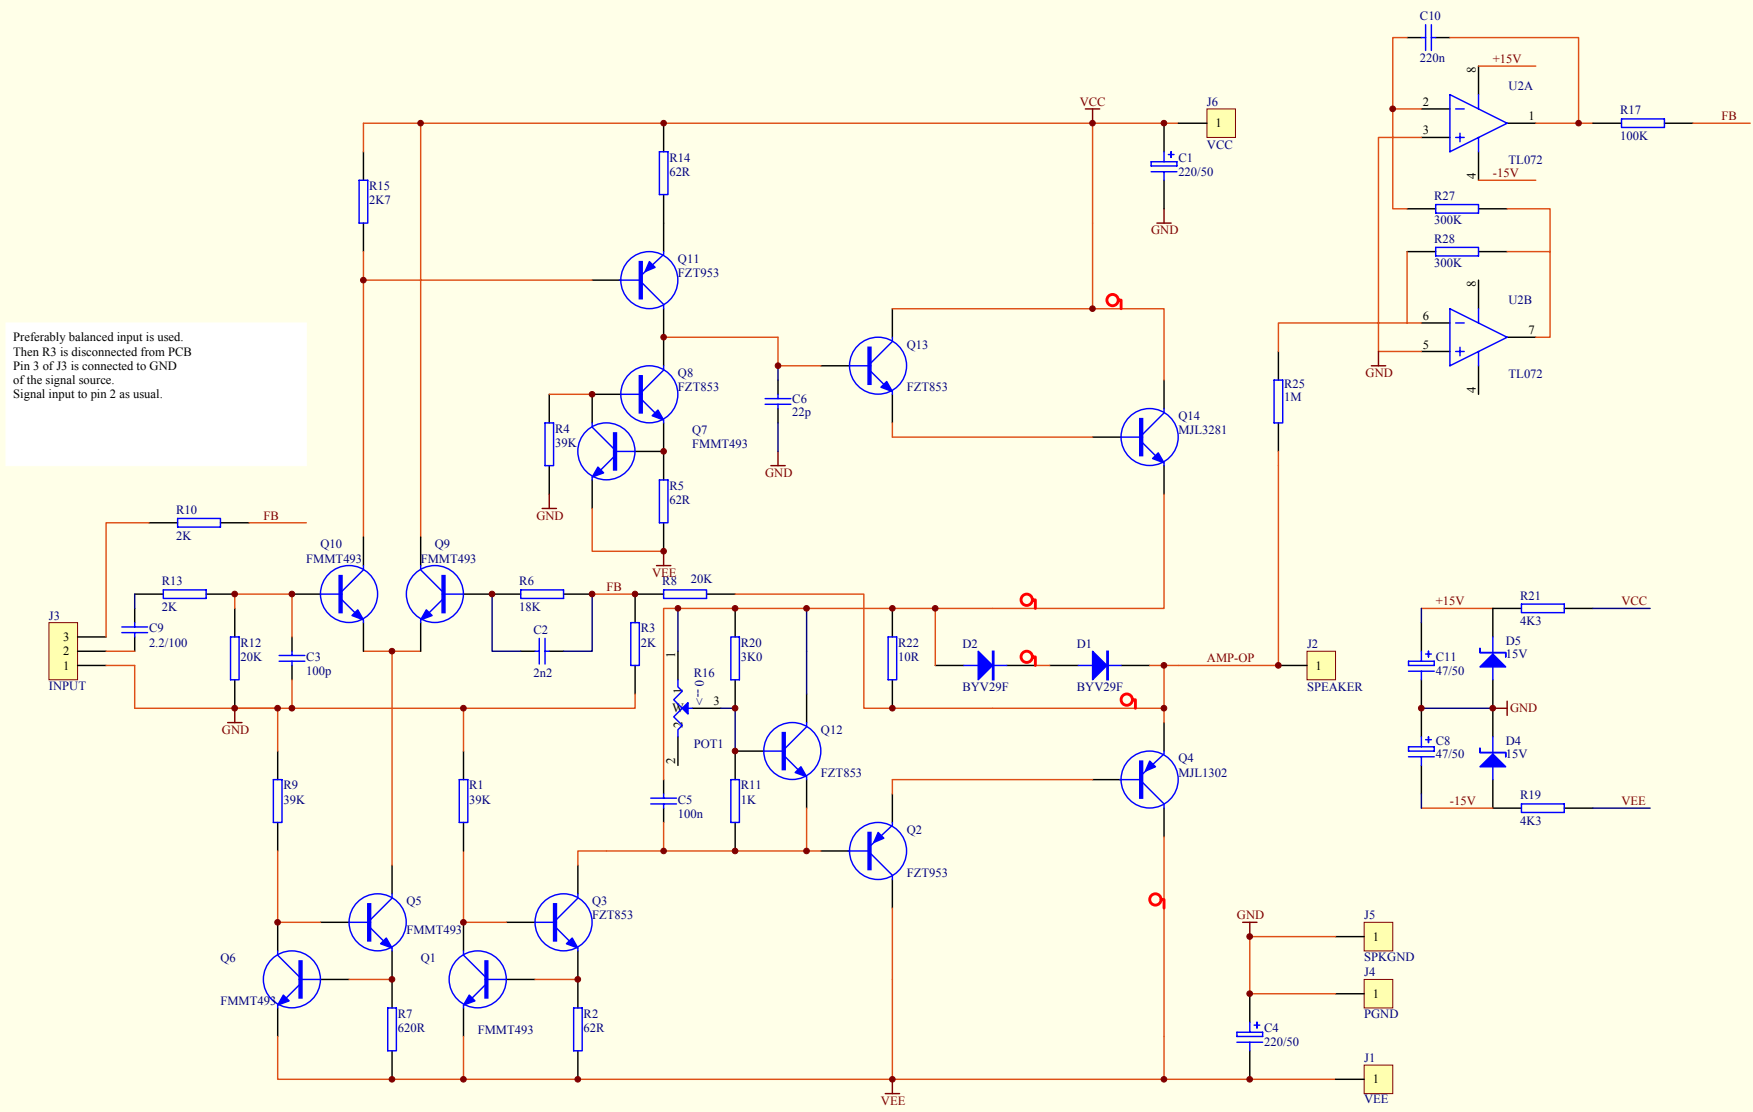

Title		
Size	Number	Revision
B		
Date:	13-Oct-2004	Sheet of
File:	C:\jobb\protel\Förstärkare\PowerAMP.dbb	Drawn By: