

## SP-50X

### Full range speaker, 50 W MAX, 8 Ohm

Soft inverse surround, long excursion with stable sheet steel basket.

#### Specifications:

Overall Diam:	-	mm	Voice coil Ø:	26	mm
Baffle cutout:	-	mm	Voice coil height:	0	mm
Depth:	0	mm	Voice coil material:	Aluminium	

Front. Material:	-		Air gap height:	0	mm
Frame Material:	Steel plate		Air gap filling:	-	


Membrane Typ:	Cone		Magnet Ø:	0	mm
Membrane Surr:	-		Magnet-height:	0	mm
Membrane Mat.:	Paper		Magnet-weight:	0	g
Dustcap Mat.:	-		Magnet-inductance:	0	T

#### Thiele-Small-Parameters:

Resonance frq.	fms: 65	Hz	Mech. Compliance	Cms	1.24mm/N
Mechanical Q	Qms:1.95		Moving Mass	Mms:	4.5 g
Electrical Q	Qes: 0.68		mech. Resistance	Rms:	0 kg/s <sup>-1</sup>
Total Q	Qts: 0.5		Max. Displacement	Xmax:	0 mm
Equivalent Air-Vol.	Vas: 9	Litre	BL Product	Bl:	4.3 N/A

DC-Resistance	Re: 6.8	Ohm	Membrane- Ø	Md:	0
Coil Inductance	Le: 0.35	mH	Membrane-Area	Sd:	75 cm <sup>2</sup>
Efficiency	Nref:0	%	Max.cutoff frequency	fmax:	kHz

SP-50X (10.0720)

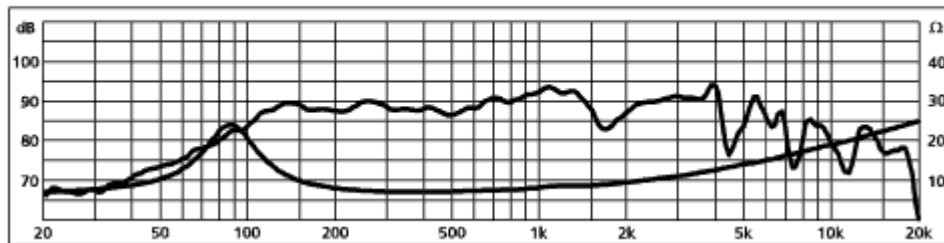

SP-50X

