

Crystal Clock Oscillator

■ NZ2520SDA Data Sheet Ultra Low Phase Noise Type

Application

For High-quality-audio, Smartphone, Tablet computers,
Wireless module, Notebook PC and DSC



RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

Pb free

Features

- Ultra low phase noise make this product ideal for High quality audio.
- Compact and light. Dimensions: 2.5 x 2.0 x 0.9 mm, weight: 0.02 g.
- Wide frequency range: 20 to 50 MHz.
- Low phase jitter (Typ. 43 fs (Frequency Offset to 12 kHz to 20 MHz) @49.152 MHz, 3.3 V)
- Automatic mounting by taping and IR reflow (lead-free) are possible.
- Lead-free.

1. Item : Crystal Clock Oscillator
 2. Type : NZ2520SDA
 3. Nominal Frequency : 20 to 50 MHz
 4. NDK Spec. No. : See Table1

5. Maximum Ratings

	Item	Ratings			Notes
		min	max	Units	
1	Supply Voltage	-0.6	+6.0	V	
2	Input Voltage	-0.6	$V_{CC} + 0.6$	V	
3	Output Current	-25	+25	mA	
4	Storage Temperature Range	-55	+125	°C	

6. Electrical Specifications

	Parameters		SYM	Electrical Spec.				Notes
				min	typ	max	Units	
1	Nominal Frequency		f_{nom}	20		50	MHz	
2	Supply Voltage		V_{CC}	+1.8 to +3.3			V	
3	Current Consumption (Operating)		I_{CC}			15	mA	at 25 °C
4	Current Consumption (Stand-by)		I_{ST}			35	μA	at 25 °C
5	Output Level		-	CMOS				
6	Load Capacitance		C_L			15	pF	
7	Operating Temperature Range		T_{opr}	-40		+85	°C	Table.1
8	Overall Frequency Tolerance		$\Delta f/f_{nom}$	-50		+50	ppm	Table.1 *1
9	Output Voltage		V_{OL}			$0.1 V_{CC}$	V	
			V_{OH}	$0.9 V_{CC}$			V	
10	Rise Time(t_r), Fall Time(t_f)		t_r/t_f			6	ns	$0.1 V_{CC}$ to $0.9 V_{CC}$
11	Symmetry		SYM	40		60	%	at $1/2 V_{CC}$
12	Start-up Time		t_{su}			4	ms	
13	Phase Noise (at +1.8 V) (at 25 °C)	F=22.5792 MHz	L(f)		-158		dBc/Hz	at 1 kHz offset frequency
		F=49.152 MHz	L(f)		-163		dBc/Hz	at 100 kHz offset frequency
	Phase Noise (+2.5 to +3.3 V) (at 25 °C)	F=22.5792 MHz	L(f)		-152		dBc/Hz	at 1 kHz offset frequency
		F=49.152 MHz	L(f)		-164		dBc/Hz	at 100 kHz offset frequency
		F=22.5792 MHz	L(f)		-164		dBc/Hz	at 1 kHz offset frequency
		F=49.152 MHz	L(f)		-169		dBc/Hz	at 100 kHz offset frequency
		F=22.5792 MHz	L(f)		-158		dBc/Hz	at 1 kHz offset frequency
		F=49.152 MHz	L(f)		-172		dBc/Hz	at 100 kHz offset frequency
14	Output Wave Form		-	Square wave				
15	Stand-by Function		#1 PAD input				# 3 PAD output	
			H level ($0.7 V_{CC}$ to V_{CC}) or open				Operating	
			L level ($0.3 V_{CC}$ max)				High impedance	

*1 Inclusive of Freq. tolerance (at 25 °C), frequency/temperature characteristics, frequency/voltage coefficient.

Table.1 NDK Spec. No. List


Overall Frequency Tolerance	Operating Temperature Range (°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.3	+3.3±0.33
±50 × 10 ⁻⁶	-40 to +85	NSC5083A	NSC5083B	NSC5083C	NSC5083D

Table.2 Supported Frequency List


Nominal Frequency [MHz]						
22.5792 MHz						
24 MHz						
24.576 MHz						
25 MHz						
27 MHz						
45.1584 MHz						
48 MHz						
49.152 MHz						
50 MHz						

Frequencies not listed in the list are also available, so please contact us if you have any request.


Output Voltage

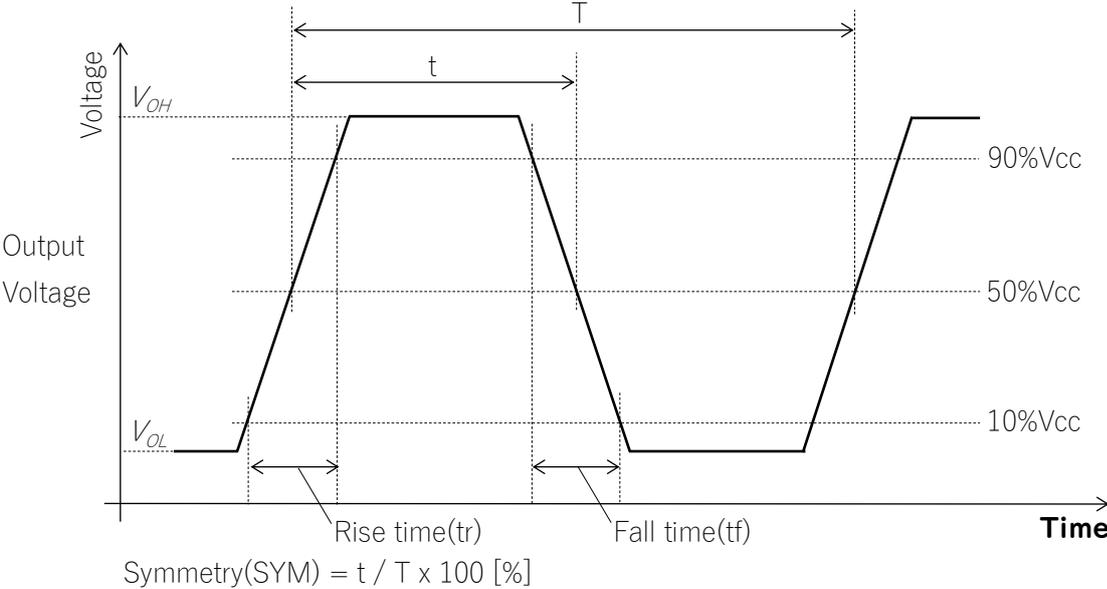

Start-up Time

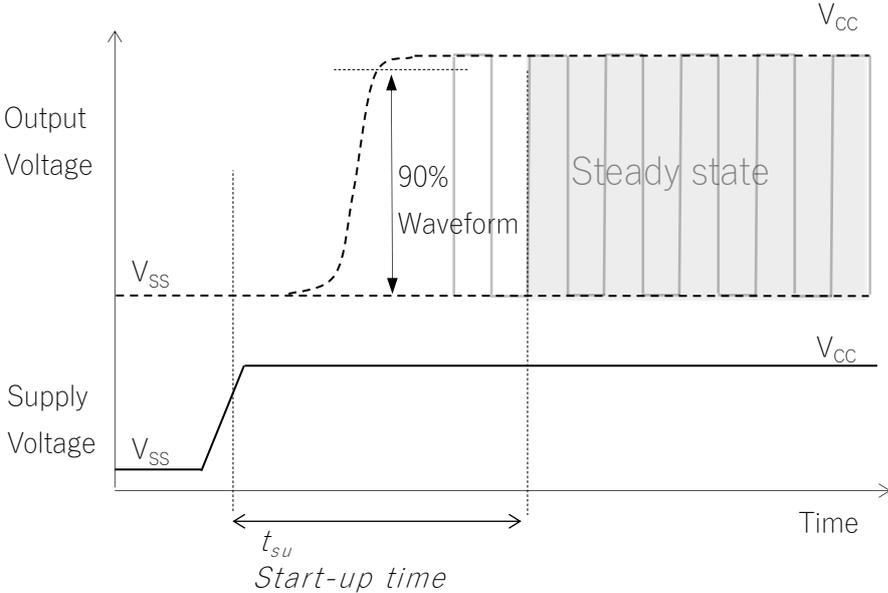


Measuring circuits

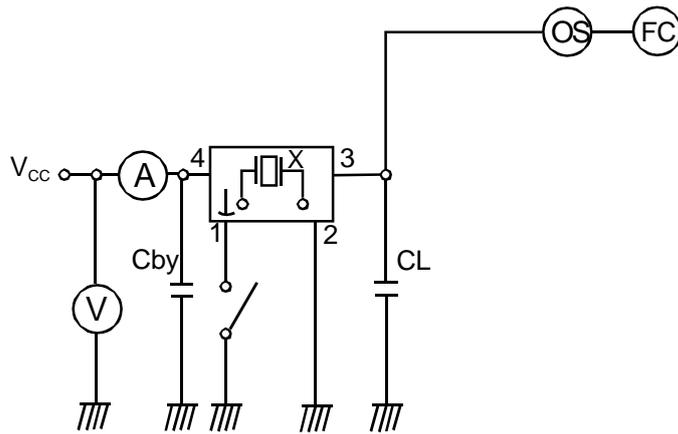

CL ; 15pF MAX including input capacity of oscilloscope
 Cby ; Bypass capacitor (0.01uF)

7. Prohibited items

Example For Soldering Conditions (The below graph corresponds to Pb free solder)

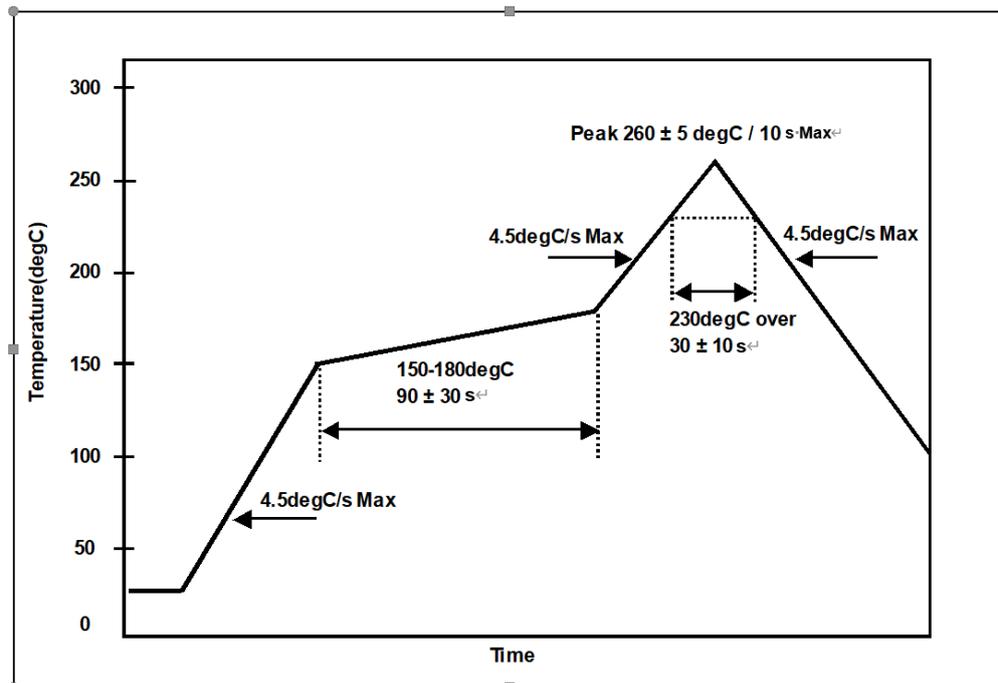

Be sure to use the product under the following conditions. Otherwise, the characteristics deterioration or destruction of the product may result.



- (1) Reflow soldering heat resistance
 - Peak temperature: 265 °C, 10 s
 - Heating: 230 °C or higher, 40 s
 - Preheating: 150 °C to 180 °C, 120 s
 - Reflow passage times: 3 times
- (2) Manual soldering heat resistance
 - Pressing a soldering iron of 350 °C on the terminal electrode for 3 s.

8. Electrostatic Discharge

MM: 200 V
HBM: 2000 V
CDM: 500 V



Dimension of External

Unit : mm

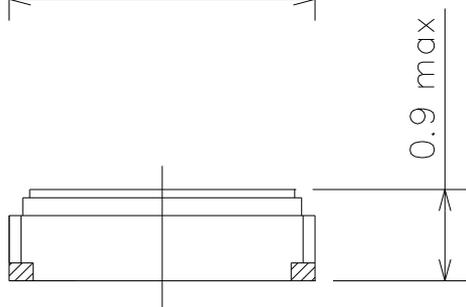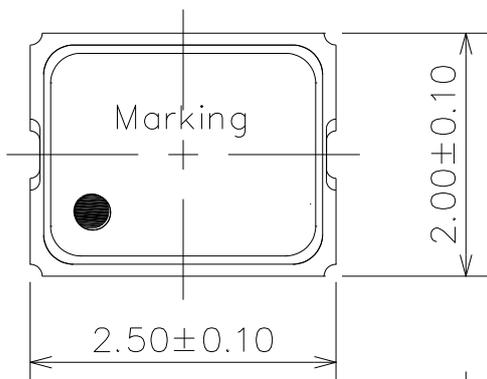


Terminal land connections

#1	STAND-BY
#2	GND
#3	OUTPUT
#4	V _{CC}

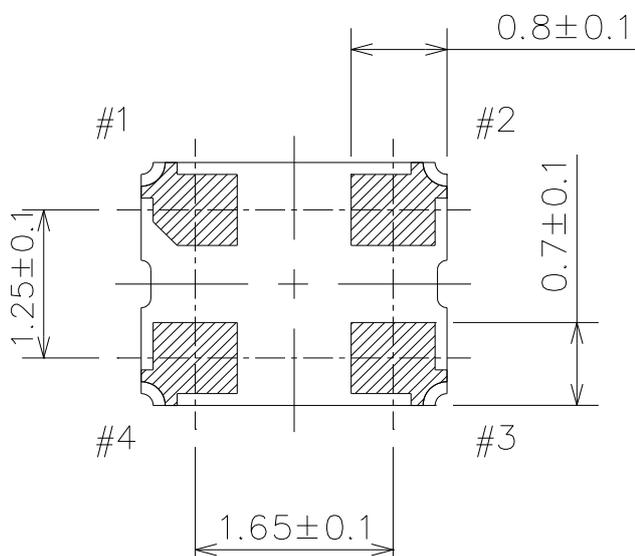
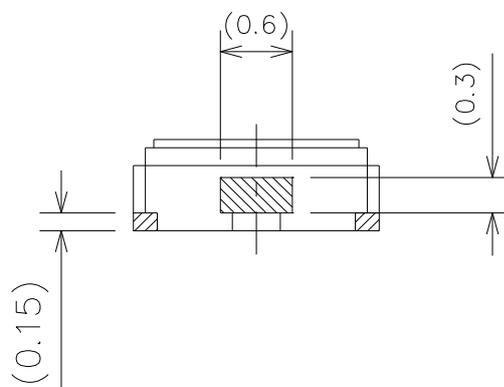


Land pattern (Recommended)

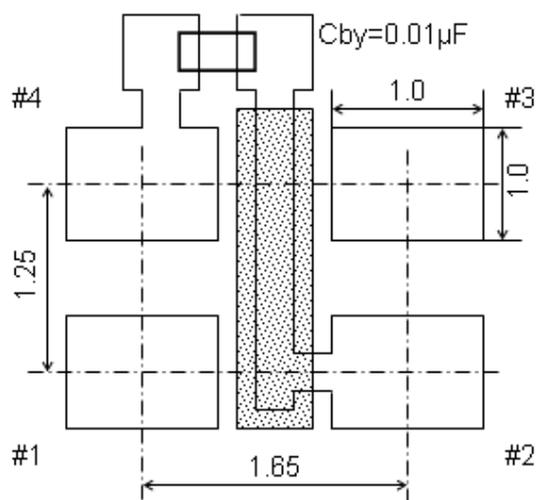


■ Taping and Reel Spec.


Unit : mm

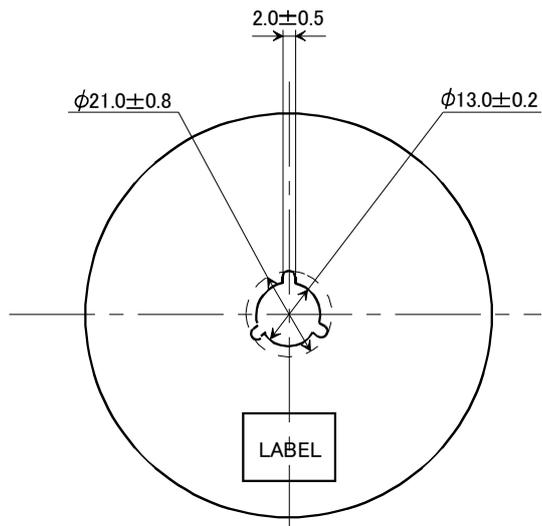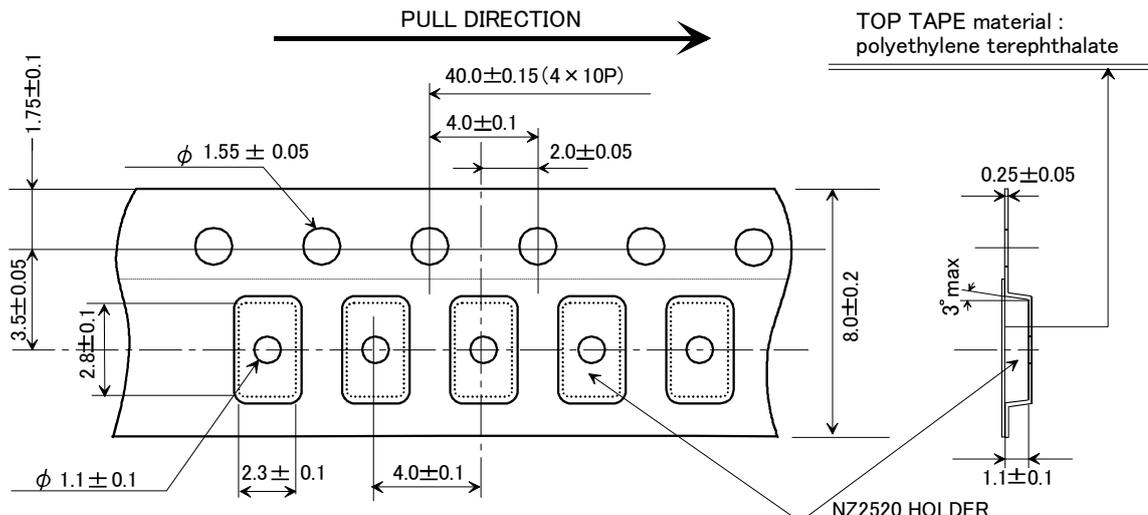

Reel material: Conductive PS
EIAJ standard reel

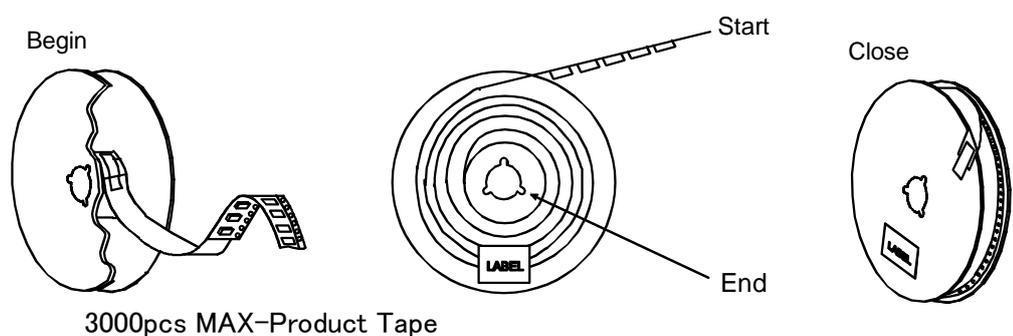

■ Marking

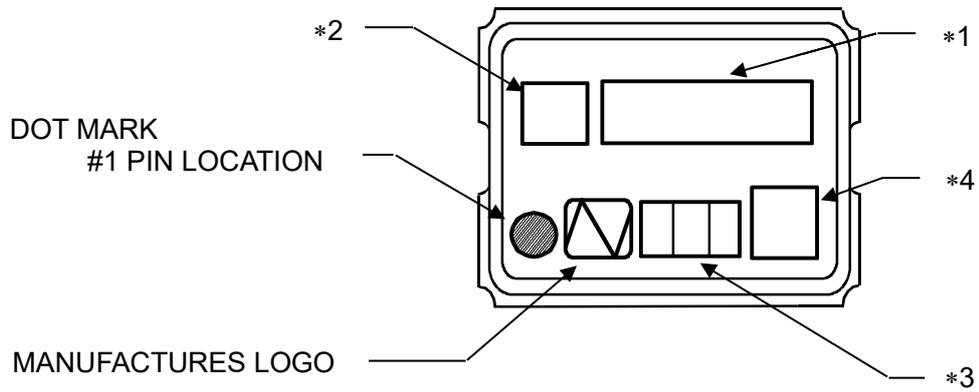

*1 [FREQUENCY]



*2 [MODEL MARK]
NZ2520SDA → D

*3 [WEEK CODE (Digit are three)]

*4 [Trace code]

■ Data

Phase Noise

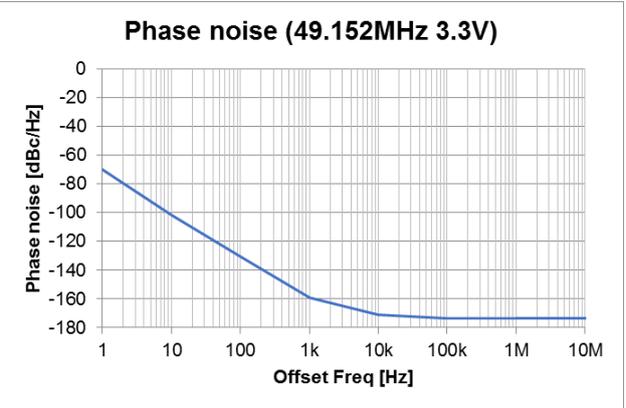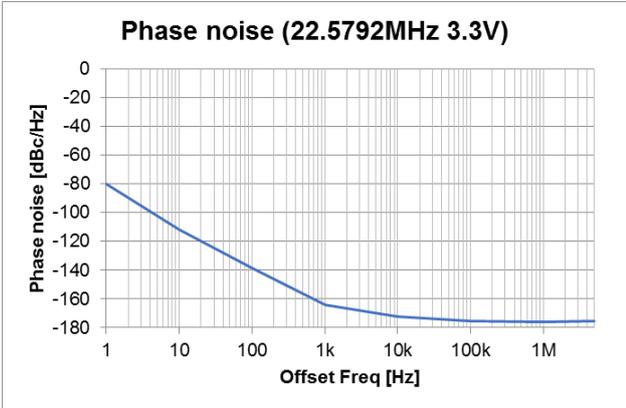

Phase Jitter

Typ. 43 fs (Offset Frequency : 12 kHz to 20 MHz) @49.152 MHz, 3.3 V

Instruction Notice

1 Noise

When using this product, please insert a bypass capacitor between the power supply and GND.
(Closer to the product terminal is desirable.)

The bypass capacitor values shown in our specifications and drawings are for reference only.
(They are not guaranteed values.)

In actual use, please select the appropriate bypass capacitor value for your circuit.

NDK shall not be liable for any and all events resulting from or in connection with the use of this product in a manner that does not comply with the above instruction.

2 Resistance to dropping

The NZ2520S series is designed to be impactproof so that no damage occurs when dropped a height (75 cm) three

times. However, if dropped from a desk etc., it is advisable to check their performance or contact us to check it.

3 Electrostatic protection

The NZ2520S series employ C-MOS ICs for the active element. Please use them in static-free environments.

4 High temperature

Normal operation cannot be guaranteed for the NZ2520S series at +125°C (for 24 h). Be sure that the units are kept within the specified temperature range.

5 Cleaning

Basically, the NZ2520S series are applicable for ultrasonic wave cleaning. However, in some case, during ultrasonic wave cleanings, internal design may get damage. Please check condition carefully beforehand.

6 Other

The NZ2520S series are C-MOS applied products. And careful handling (same as with C-MOS IC) are needed to avoid electrostatic problems.

Incorrect PAD connection is cause of trouble. Please make sure to connect correctly as below.

#2 terminal → GND

#4 terminal → V_{CC}

Notes On Use

1 Even if the appearance color etc. of the product differs by purchasing the component parts by more than two companies, there is no influence on the characteristics and reliability.

2 IN THE CASE OF THE FOLLOWING ITEMS, WE ARE NOT RESPONSIBLE FOR WARRANTY / COMPENSATION.

(1) WHEN PRODUCTS OF THIS SPECIFICATION ARE USED FOR EQUIPMENT RELATED TO HUMAN LIFE OR PROPERTY, IT IS THE RESPONSIBILITY OF THE CUSTOMER TO CONFIRM THE INFLUENCE ON THIS PRODUCT AND EQUIPMENT TO BE USED BEFOREHAND, CONDUCT NECESSARY SAFETY DESIGN (INCLUDING REDUNDANT DESIGN, MALFUNCTION PREVENTION DESIGN, etc.), PLEASE USE IT AFTER SECURING SUFFICIENT SAFETY OF EQUIPMENT.

1.SAFETY-RELATED EQUIPMENT SUCH AS AUTOMOBILES, TRAINS, SHIPS, etc., OR EQUIPMENT DIRECTLY INVOLVED IN OPERATION

2.AIRCRAFT EQUIPMENT

3.SPACE EQUIPMENT

4.MEDICAL EQUIPMENT

5.MILITARY EQUIPMENT

6.DISASTER PREVENTION / CRIME PREVENTION EQUIPMENT

7.TRAFFIC LIGHT

8.OTHER EQUIPMENT REQUIRING THE SAME PERFORMANCE AS THE ABOVE-MENTIONED EQUIPMENT

(2) IN CASES WHERE IT IS NOT INDICATED IN THE REQUESTED STANDARD AND IS USED UNDER CONDITIONS OF USE (INCLUDING CIRCUIT MARGIN etc.) THAT CAN NOT BE PREDICTED AT THE PRODUCTION STAGE.

- (3) WHEN USING ULTRASONIC WELDING MACHINE.(THERE IS A POSSIBILITY THAT THE CHARACTERISTIC DEGRADATION IS CAUSED BY THE RESONANCE PHENOMENON OF THE PIEZOELECTORIC MATERIAL.(EXAMPLE;CRYSTAL PIECE))
WE WILL NOT TAKE ANY RESPONSIBILITY FOR THE INFLUENCE OF THE CUSTOMERS' PROCESS.
SO, PLEASE SUFFICIENTLY EVALUATE AT A SAMPLE STEP WHEN YOU USE ULTRASONIC WELDING MACHINE.
- (4) USING RESIN MOLD MAY AFFECT THE PRODUCT CHARACTERISTIC.
PLEASE MAKE SURE TO TELL OUR SALES CONTACT WHEN YOU USE RESIN MOLD. WE WILL PERFORM INDIVIDUAL CORRESPONDENCE ABOUT A DELIVERY SPECIFICATION AND A EVALUATION METHOD.
IN ADDITION, IF YOU USE RESIN MOLD WITHOUT CONTACTING US, AND CAUSES DAMAGES AGAINST A CUSTOMER OR A THIRD PARTY, WE WILL NOT BE LIABLE FOR THE DAMAGES AND OTHER RESPONSIBILITIES BECAUSE WE CONSIDER IT IS UNDER ELF-RESPONSIBILITY USING RESIN MOLD.
WE WILL NOT TAKE ANY RESPONSIBILITY FOR THE INFLUENCE OF THE CUSTOMERS' PROCESS. PLEASE EFFICIENTLY EVALUATE AT A SAMPLE STEP WHEN YOU USE RESIN MOLD.
- (5) WHEN PERFORMING IMPROPER HANDLING THAT EXCEEDS THE GUARANTEED RANGE.
- 3 This product can not be used for equipment related to the safety of automobiles or equipment directly involved in operation.(example: air bag, TPMS, engine control, steering control, brake control etc.)

Notes on storage

- 1 When storing the product in high temperature and high humidity condition for a long time, product characteristics (solderability etc.) and packaging condition may be deteriorated. Please store product at temperature + 5 °C to + 35 °C, humidity 85 % RH or less. The product is an electronic component, so please do not storage and use, under a dewing state.
- 2 The product storage deadline is 12 months after delivery in unopened state. Please use within storage deadline. If you exceed storage deadline, please check the product characteristics etc, please use.

Handling of this document and other requests

Please refer to the " Site Guidance" on our website for the handling of information contained in this document. (<https://www.ndk.com/en/terms/>)