


OVERALL CIRCUIT DIAGRAM 4/4 [SUB (LED, OUT1, OUT2, PSW, VR)]

SUB

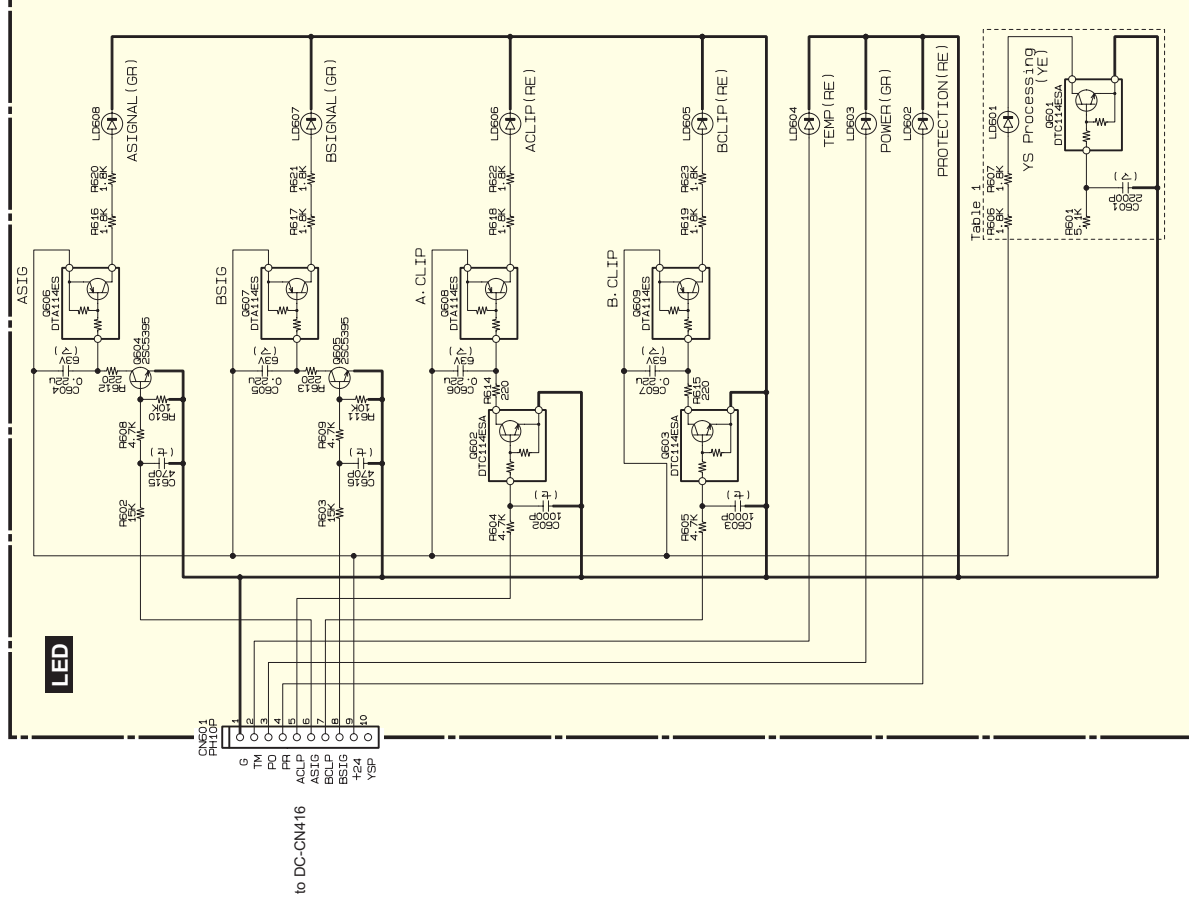

28CC1-8833618

P1000S/P2500S/P3500S

OUT1

OUT2


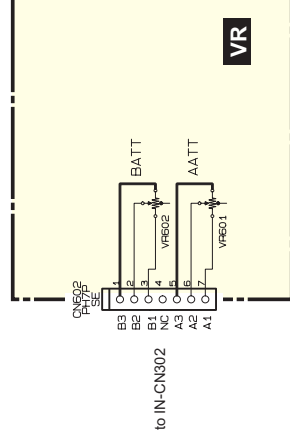
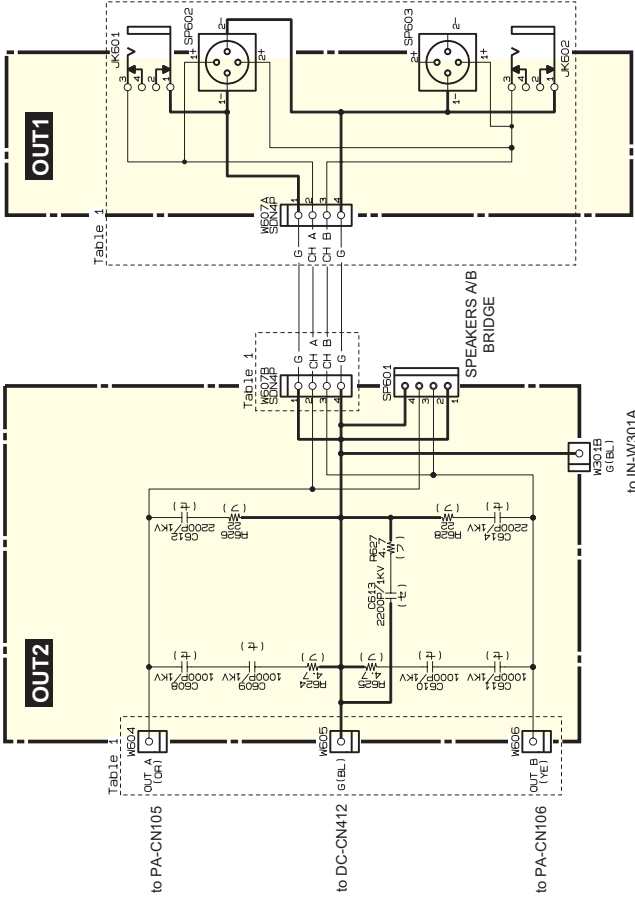


Table 1

MODEL	SHEET	OUT1	OUT2	VR	PSW
P1000S	SUB10	—	—	—	—
P2500S	SUB25	—	—	—	—
P3500S	SUB35	—	—	—	—

O: Installed
—: not installed

Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.

(㊦): Ceramic Capacitor (セラミックコンデンサー)
(マ): Mylar Capacitor (マイラーコンデンサー)
() : Flame Proof C. Resistor