


Measurement: One-Port

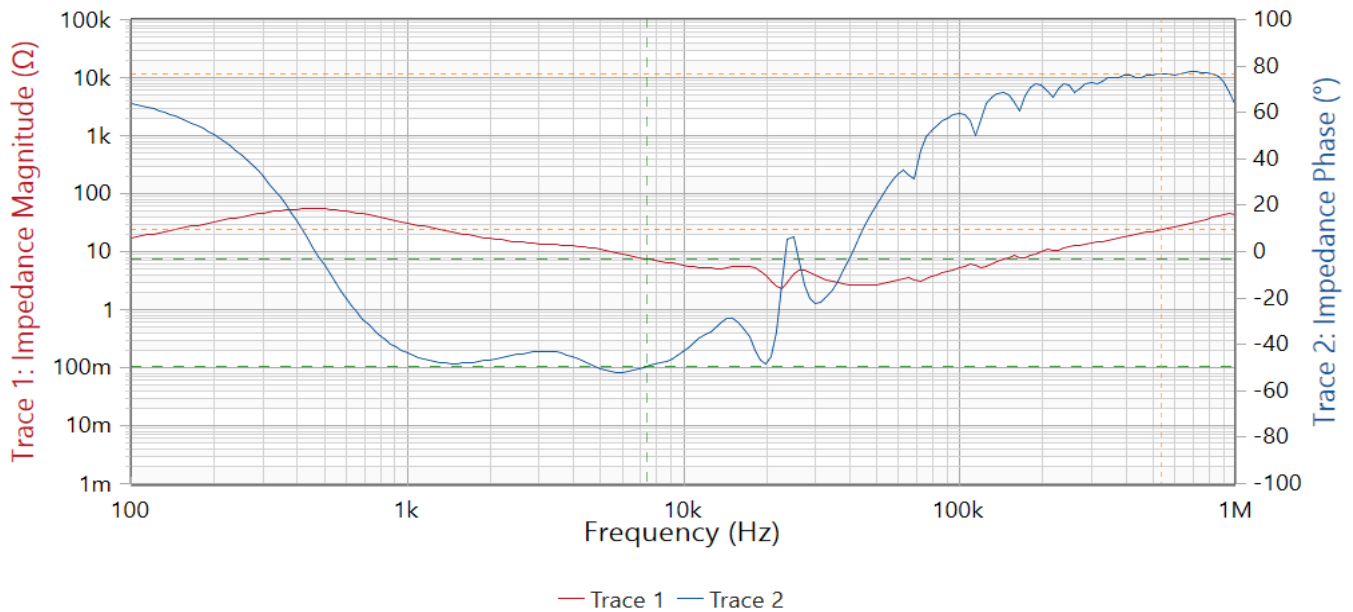

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	7.368 kHz	542.884 kHz	535.515 kHz
Trace 1	Magnitude	Magnitude	Magnitude
Measurement	7.516 Ω	24.33 Ω	16.814 Ω
Trace 2	Phase ($^\circ$)	Phase ($^\circ$)	Phase ($^\circ$)
Measurement	-49.541 $^\circ$	76.711 $^\circ$	126.252 $^\circ$

Sweep	
Start frequency:	100 Hz
Stop frequency:	1 MHz
Center frequency:	500.05 kHz
Span:	999.9 kHz
Sweep mode:	Logarithmic
Numer of points:	201

Calibration	Full-Range	User-Range
Impedance	-	-
Attenuator setting	Channel 1	Channel 2
Reflection	10 dB	10 dB

Hardware setup	
Device type:	Bode100R1
Serial number:	CK212C
Receiver bandwidth:	300 Hz
Output level:	0 dBm
DUT settling time:	0 ms