


Measurement: Gain / Phase

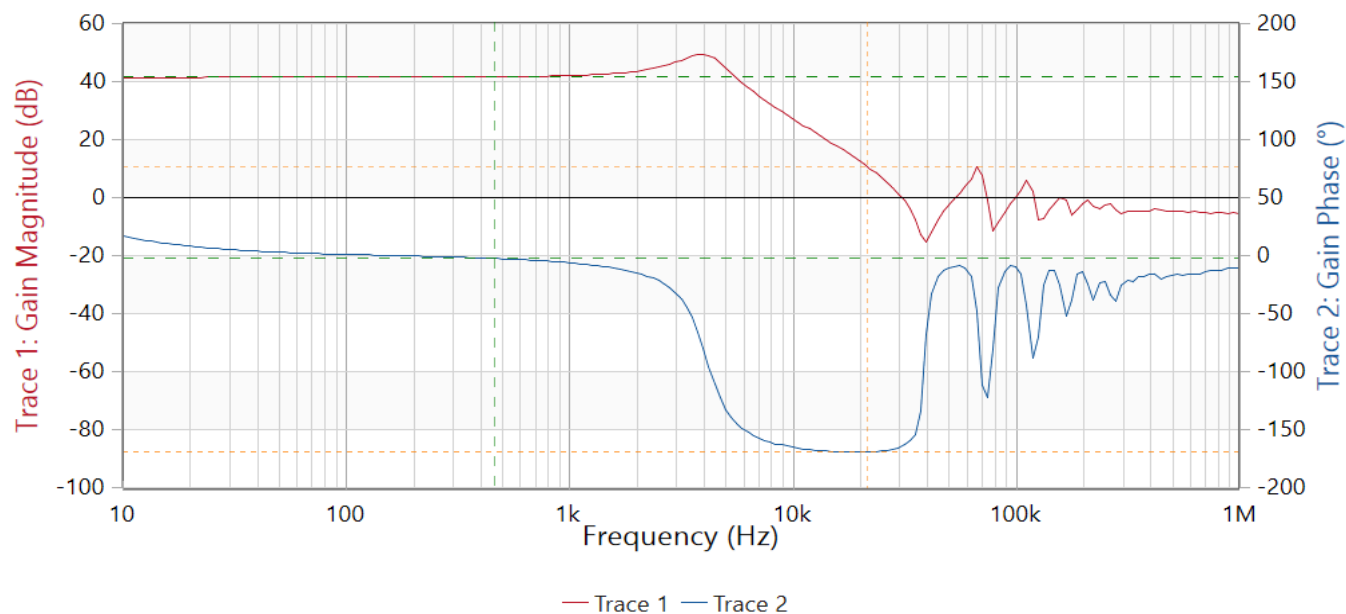

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	464.159 Hz	21.544 kHz	21.08 kHz
Trace 1	Magnitude (dB)	Magnitude (dB)	Magnitude (dB)
Measurement	41.698 dB	10.85 dB	-30.848 dB
Trace 2	Phase (°)	Phase (°)	Phase (°)
Measurement	-2.465 °	-169.299 °	-166.834 °

Sweep	
Start frequency:	10 Hz
Stop frequency:	1 MHz
Center frequency:	500.005 kHz
Span:	999.99 kHz
Sweep mode:	Logarithmic
Numer of points:	201

Hardware setup	
Device type:	Bode100R1
Serial number:	CK212C
Receiver bandwidth:	1 kHz
Output level:	-20 dBm
DUT settling time:	0 ms

Calibration	Full-Range	User-Range
Gain	-	-
Termination	Channel 1	Channel 2
Gain	1 MΩ	1 MΩ
Attenuator setting	Channel 1	Channel 2
Transmission	20 dB	40 dB