


# Measurement: Transmission / Reflection

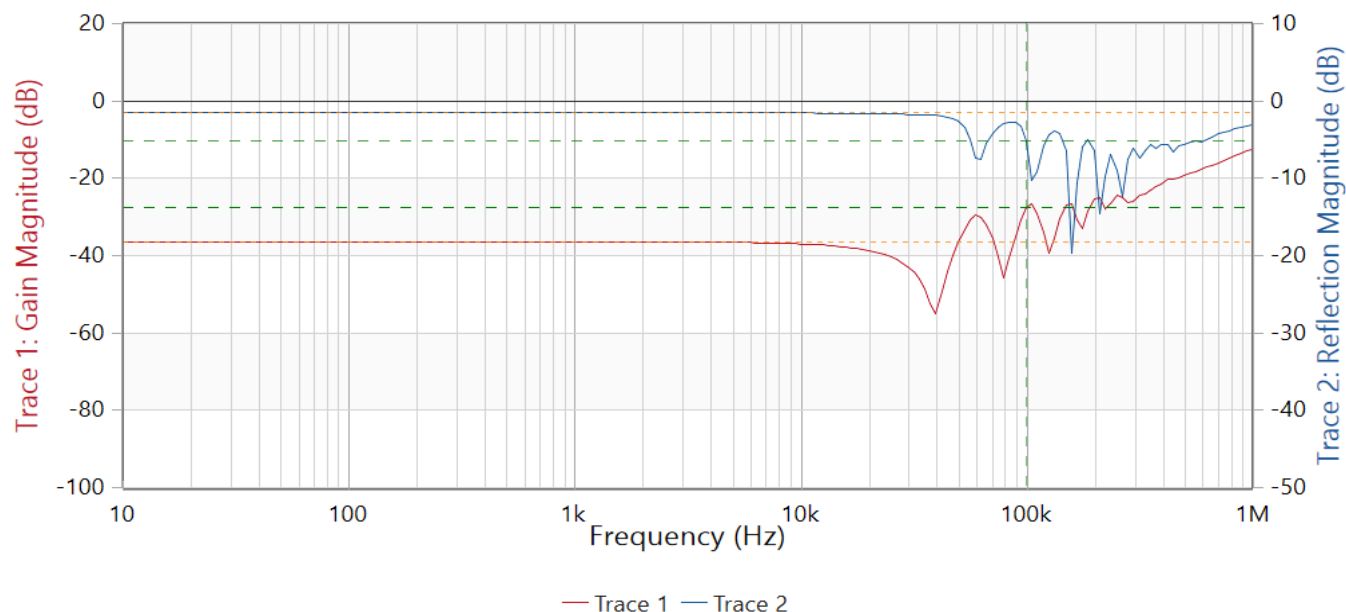

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	100.009 kHz	10 Hz	-99.999 kHz
<b>Trace 1</b>	<b>Magnitude (dB)</b>	<b>Magnitude (dB)</b>	<b>Magnitude (dB)</b>
Measurement	-27.531 dB	-36.539 dB	-9.008 dB
<b>Trace 2</b>	<b>Magnitude (dB)</b>	<b>Magnitude (dB)</b>	<b>Magnitude (dB)</b>
Measurement	-5.136 dB	-1.51 dB	3.625 dB

Sweep	
Start frequency:	10 Hz
Stop frequency:	1 MHz
Center frequency:	500.005 kHz
Span:	999.99 kHz
Sweep mode:	Logarithmic
Numer of points:	201

Hardware setup	
Device type:	Bode100R1
Serial number:	CK212C
Receiver bandwidth:	100 Hz
Output level:	0 dBm
DUT settling time:	0 ms
Nominal Impedance:	50 Ω

Calibration	Full-Range	User-Range
Gain	-	-
Impedance	-	-

Termination	Channel 1	Channel 2
Gain	1 MΩ	50 Ω
Impedance	1 MΩ	50 Ω

Attenuator setting	Channel 1	Channel 2
Transmission	20 dB	20 dB
Reflection	10 dB	10 dB

Receiver switch	Channel 1	Channel 2
Gain	Internal	External
Impedance	Internal	Internal