


* The specification subject to change without notice." "The drawing is for reference only.

R13-135

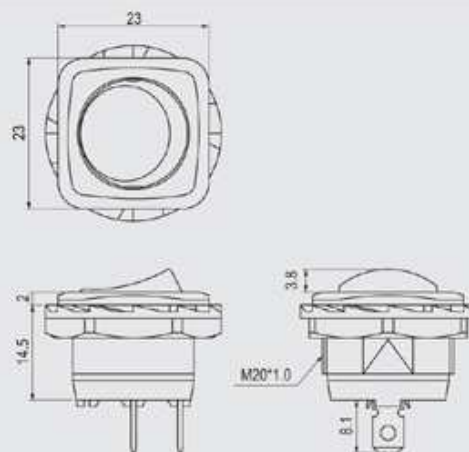

Rating

16A 125V AC
10A 250V AC

Contact resistance

50mΩ Max


Insulation resistance

DC 500V 100MΩ Min

Dielectric strength

AC 1500V 1 minute

Cut-out



6 mm max

FEATURES

- * MATERIAL: Frames are nylon with glass fiber (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber and green colors.



R13-135 -

FUNCTION				TERMINAL
A 2P SPST	C 3P SPDT	G 3P SPDT (ON)	L F 4P SPST (LED) LED Rating @10MA V _F =1.85V	0 2 .187" SQ R13-135-02 R13-135R-02 R13-135A-02 R13-135B-02
A 2 2P SPST	D 3P SPDT	H 3P SPDT	L P 4P SPST (LED) LED Rating @10MA V _F =1.85V	
B 3P SPST (ILLUMINATED) 125V AC 33KΩ / 250V AC 150KΩ	E 2P SPST (OFF)	I 3P SPDT	B P 3P SPST (ILLUMINATED) 125V AC 33KΩ / 250V AC 150KΩ	
B 2 3P SPST (ILLUMINATED) 125V AC 33KΩ / 250V AC 150KΩ	F 2P SPST	L 4P SPST (LED) LED Rating @10MA V _F =1.85V	* () = momentary R13-135-02 R13-135R-02	