


VOLTAGES &  
CURRENTS 9/22/24

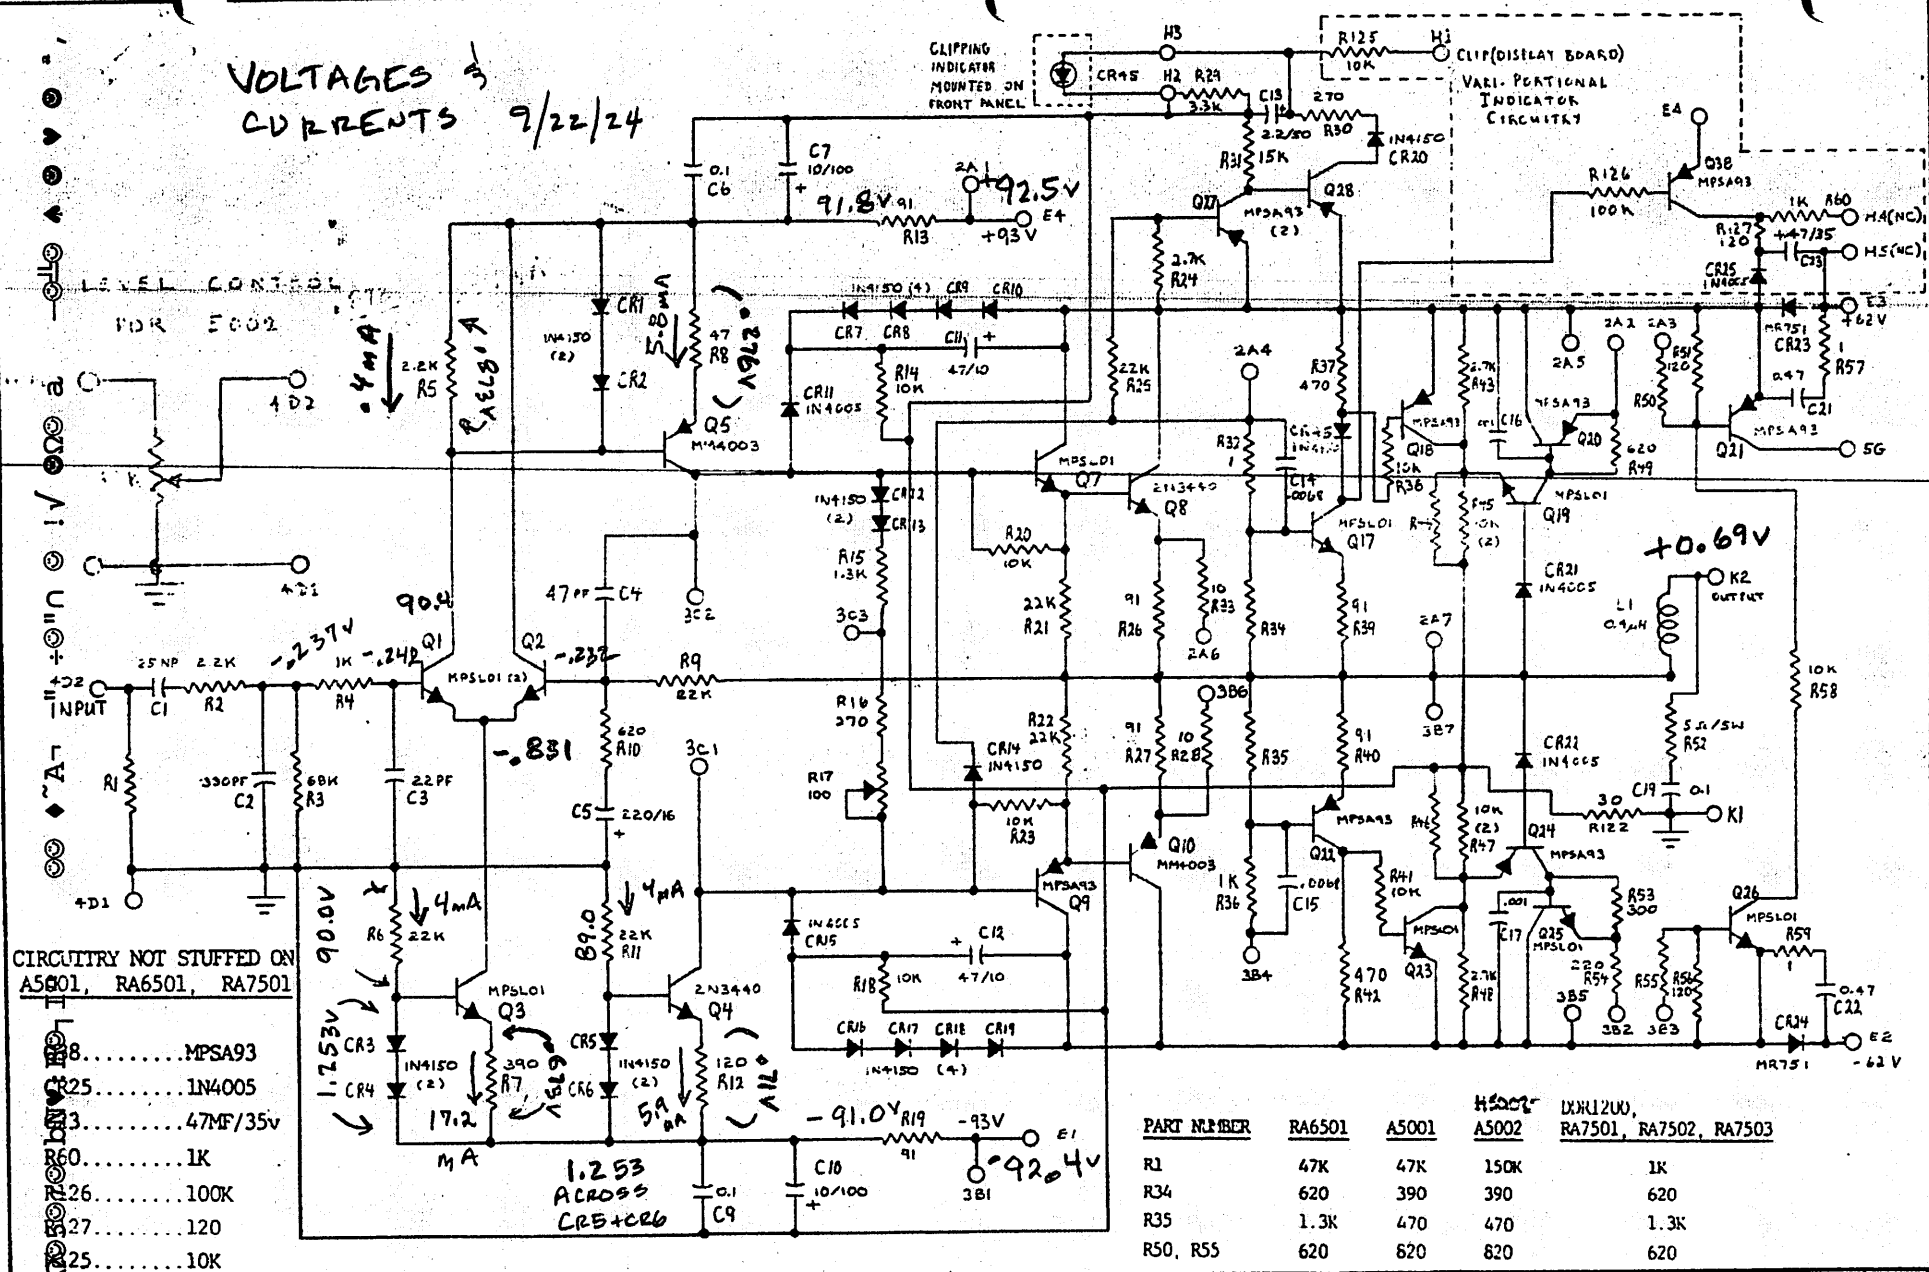

MODELS: MA5002A, A5002, A5001, RA6501, RA7502, RA7503, DDA1200  
FOR SERIAL #'S WITH PREFIXES: AW, AP, LP, HW, BW, F & CF  
FOR RA7501 SERIAL #'S S147939 and above.

| <u>PART NUMBER</u> | <u>RA6501</u> | <u>A5001</u> | <u>A5002</u> | <u>RA7501, RA7502, RA7503</u> |
|--------------------|---------------|--------------|--------------|-------------------------------|
| R1                 | 47K           | 47K          | 150K         | 1K                            |
| R34                | 620           | 390          | 390          | 620                           |
| R35                | 1.3K          | 470          | 470          | 1.3K                          |
| R50, R55           | 620           | 620          | 620          | 620                           |

NOTES:

- ① RESISTANCE IN OHMS,  
CAPACITANCE IN MICROFARADS  
UNLESS OTHERWISE SPECIFIED.
- ② PIN DESIGNATIONS REFER  
TO BOARD NUMBER,  
CONNECTOR LETTER, AND  
PIN NUMBER RESPECTIVELY.

SOUNDCRAFTSMEN

|               |  |                 |
|---------------|--|-----------------|
| SCALE: —      | APPROVED BY:  | DRAWN BY: J.H.  |
| DATE: 3-27-80 |  | REVISED 6-26-84 |

SCHEMATIC: AMPLIFIER

H5002

DRAWING NUMBER  
1749

(1002) 4311H  
 (1002) 4311H

