



High-Pass Filter settings:
(Roll-off below 16 Hz.)

- Second-Order: J3, J4, J5, J6 = 2+3
- Third-Order: J3, J4 = 1+2
J5, J6 = 1+4

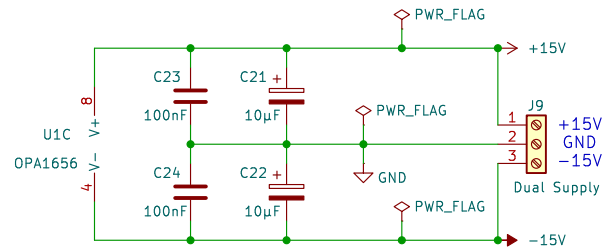

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

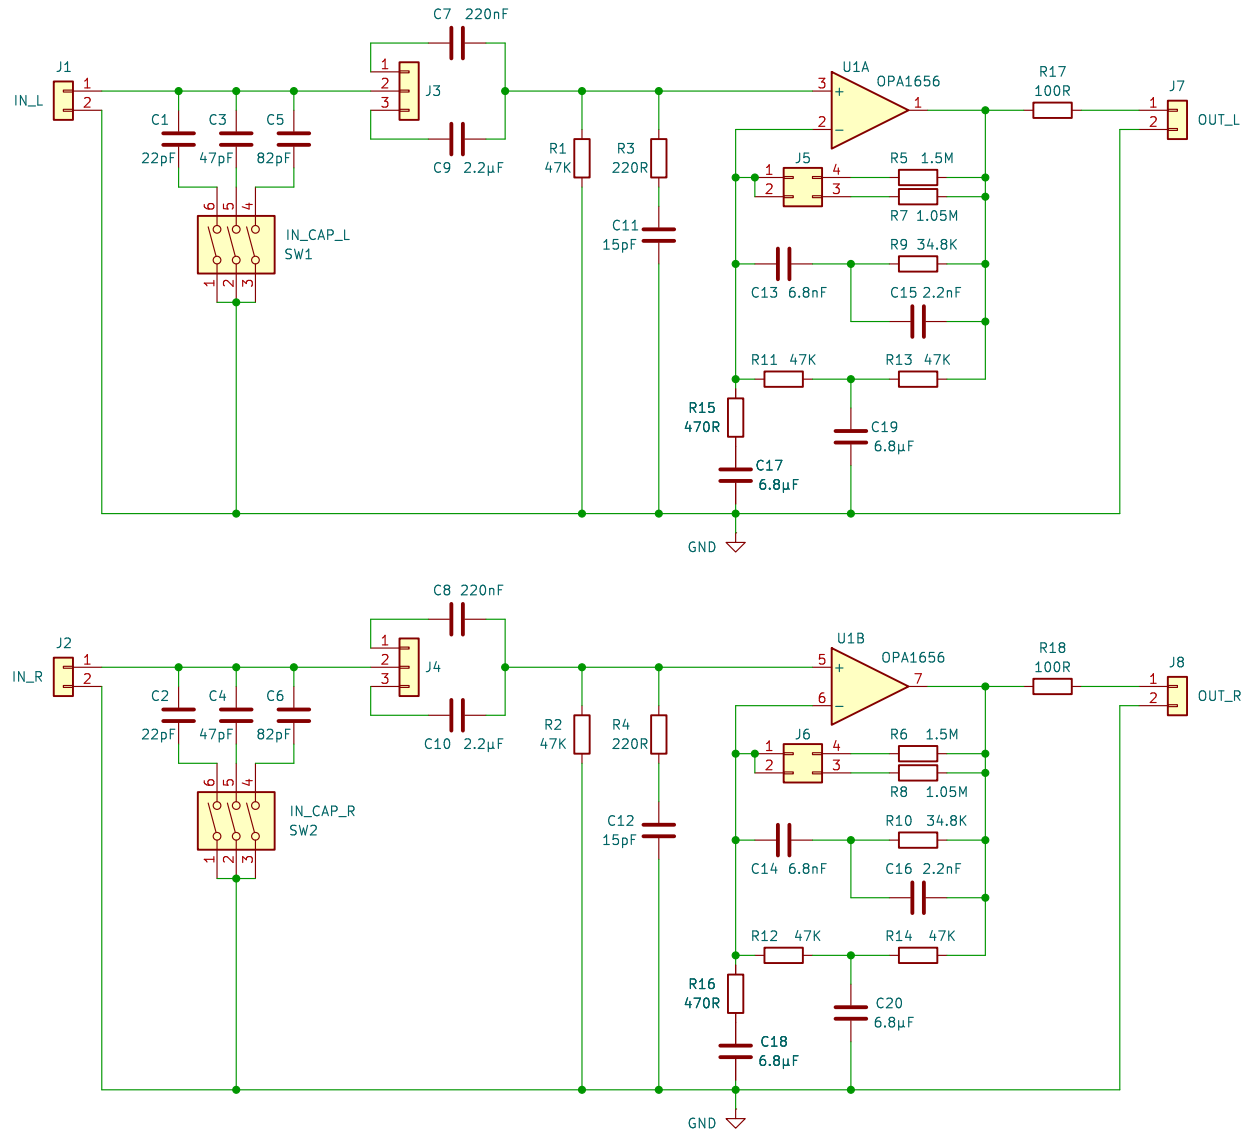

* Circuit Design by MarcelvdG – Diyaudio.com
PCB layout by Ansible – Diyaudio.com

Sheet: /
File: RIAA-Pre_HPF_MG_01b_kicad_sch

Title: OPA1656 RIAA Preamp with High-Pass Filter

Size: A4 Date: 2025-04-21

KiCad E.D.A. 8.0.8

Rev: 0.1b

Id: 1/1