

R 56dB

L 56dB

RightMark Audio Analyzer test


Testing chain: External loopback (line-out - line-in)

Sampling mode: 24-bit, 44 kHz


Summary

Test	R 56dB	L 56dB
Frequency response (from 40 Hz to 15 kHz), dB:	+0.37, -0.43	+0.38, -0.44
Noise level, dB (A):	-74.5	-74.6
Dynamic range, dB (A):	74.2	74.5
THD, %:	0.00603	0.00487
IMD + Noise, %:	0.085	0.096
Stereo crosstalk, dB:	-35.2	-34.7


Frequency response

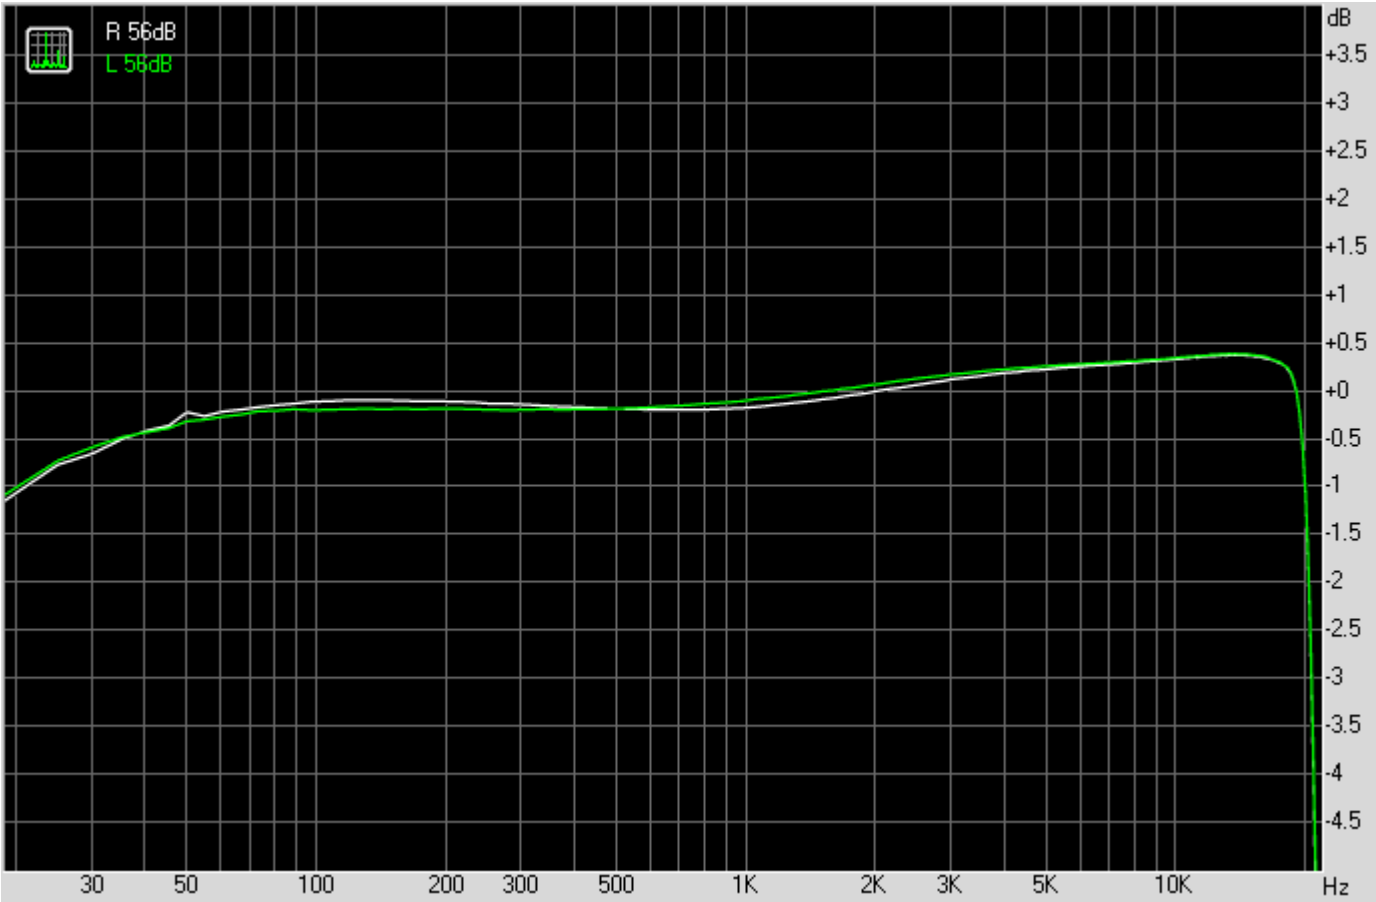


Noise level

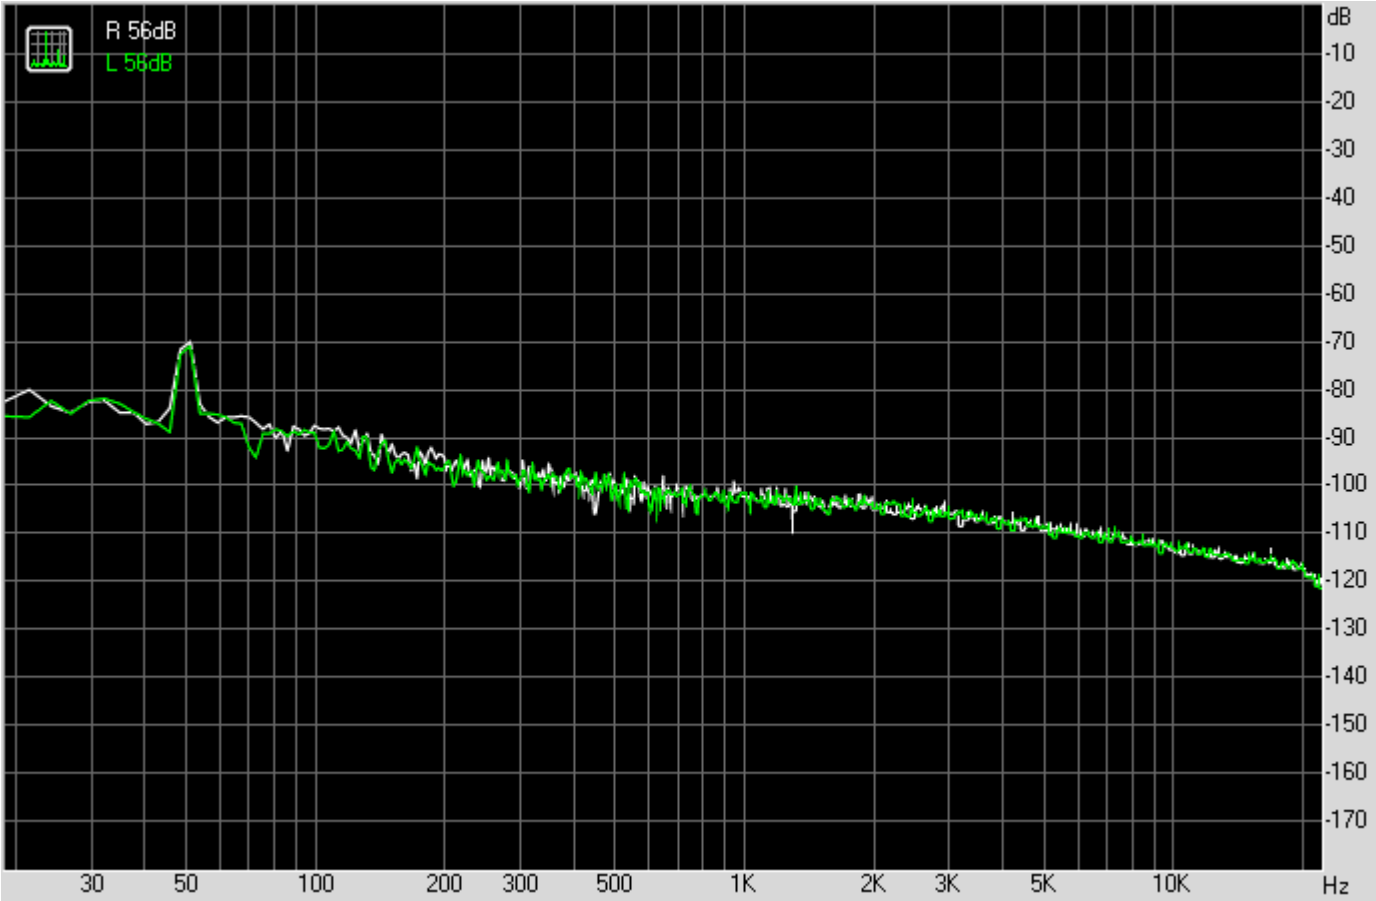


Dynamic range

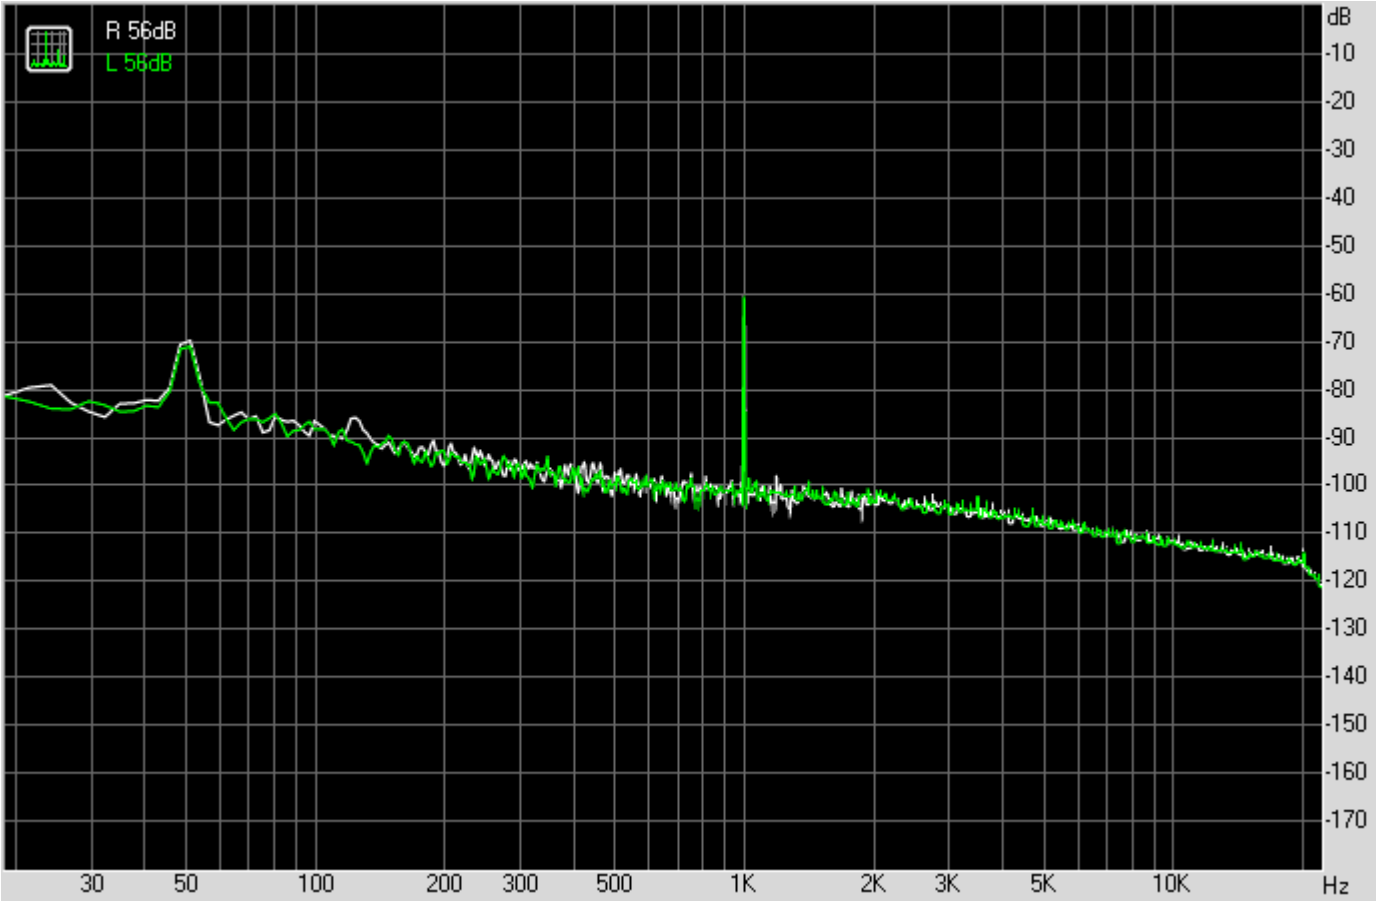


THD + Noise (at -3 dB FS)

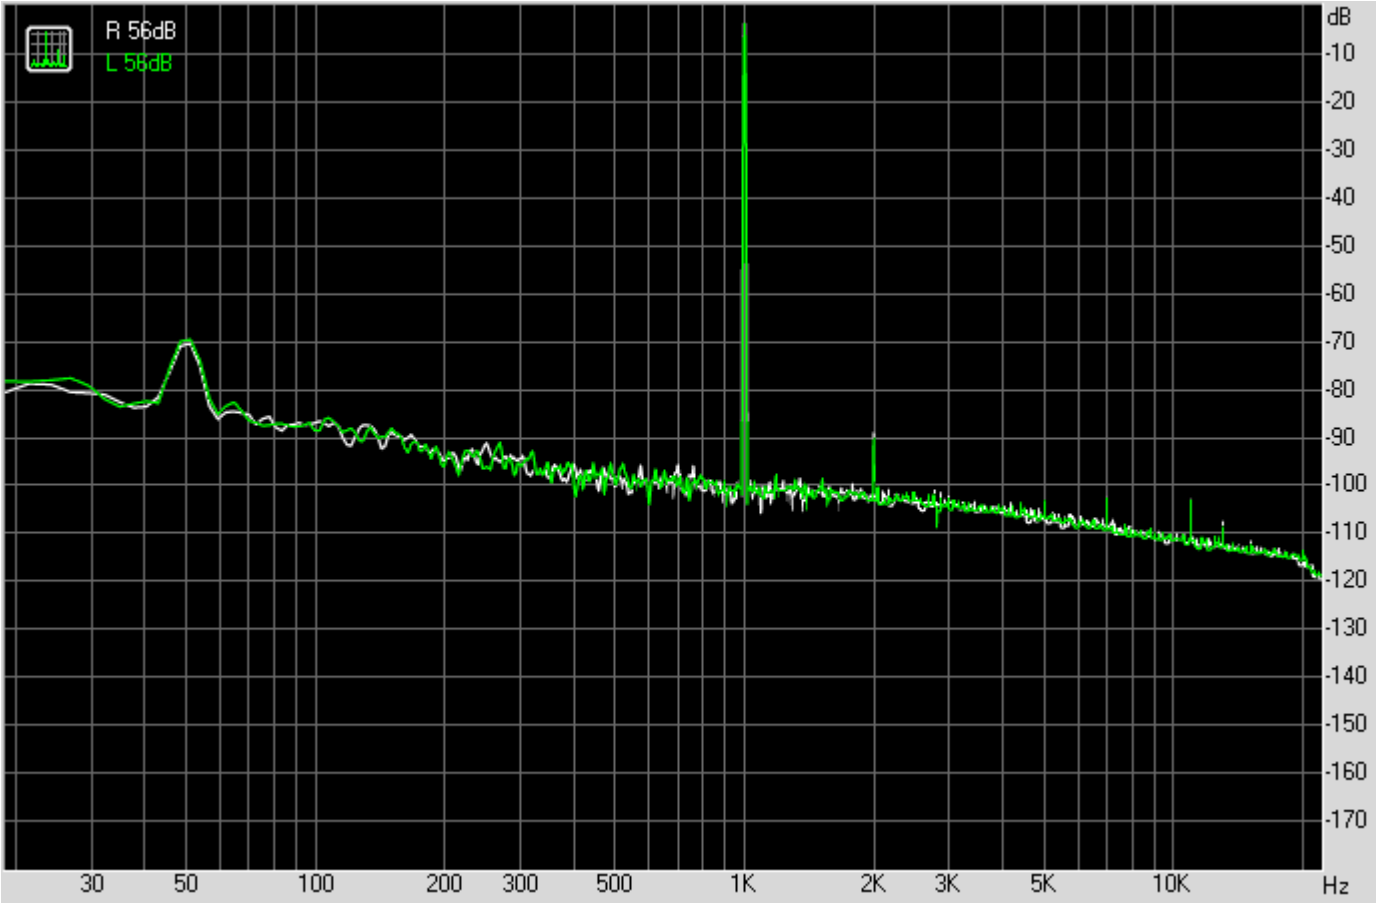

Intermodulation distortion

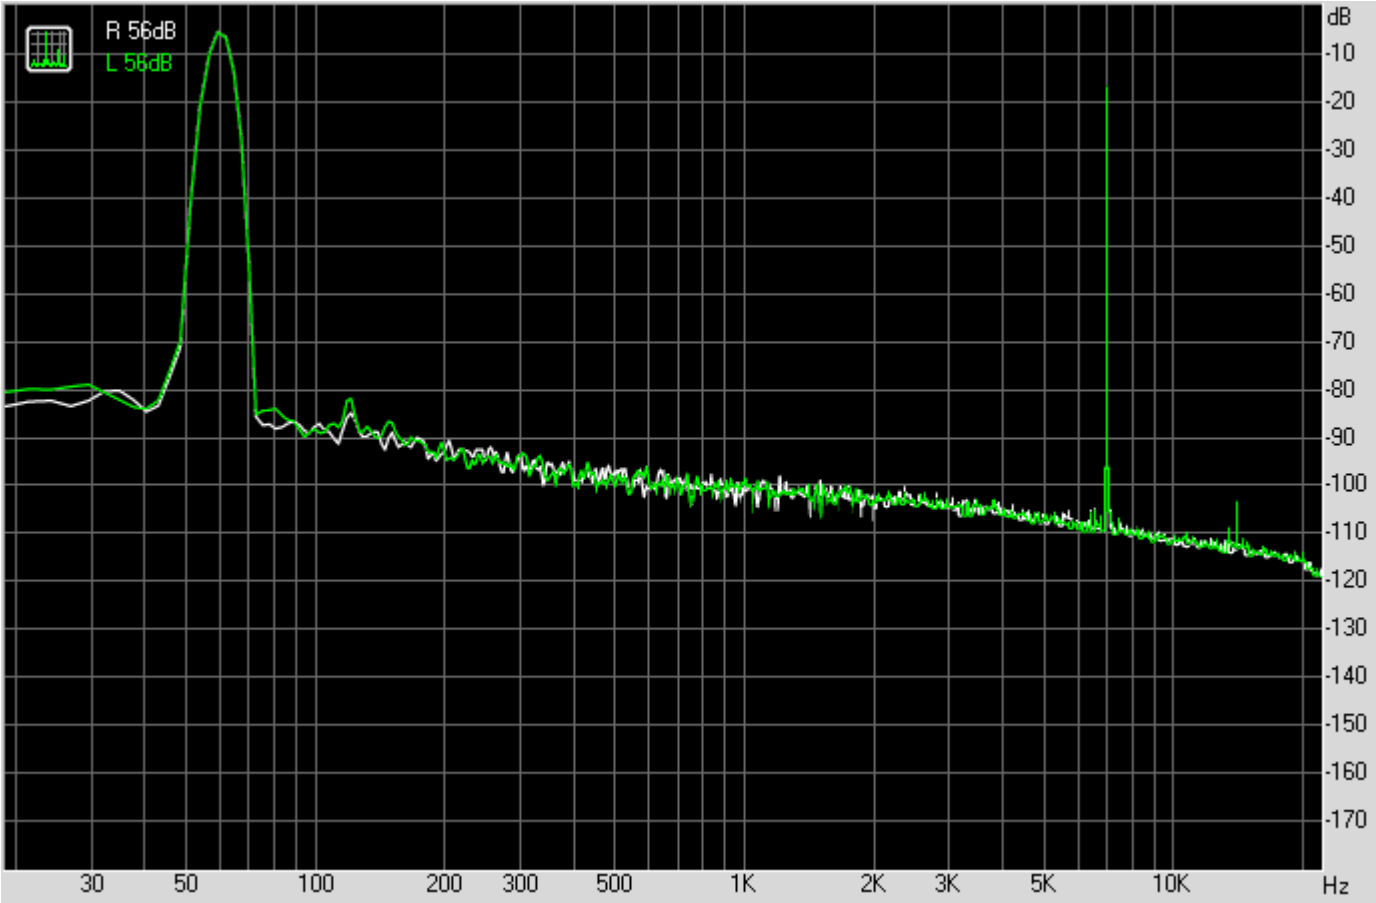

Stereo crosstalk

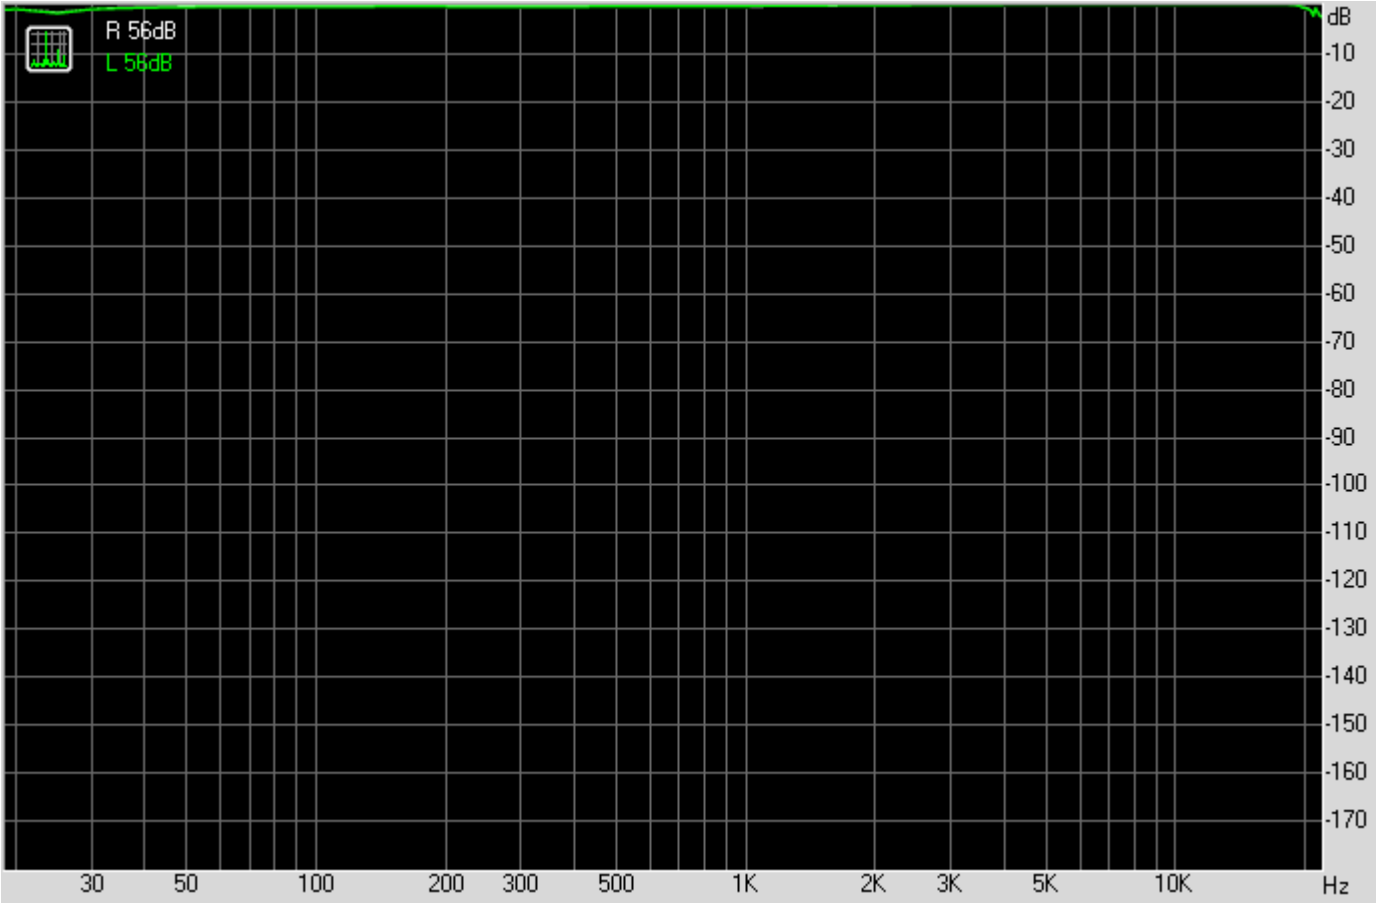

This report was generated by RightMark Audio Analyzer 6.0