

R 63 dB

L 63dB

RightMark Audio Analyzer test


Testing chain: External loopback (line-out - line-in)

Sampling mode: 24-bit, 44 kHz


Summary

| Test   | R 63 dB      | L 63dB       |
|--|--------------|--------------|
| Frequency response (from 40 Hz to 15 kHz), dB: | +0.27, -0.22 | +0.21, -0.19 |
| Noise level, dB (A):                           | -66.8        | -67.0        |
| Dynamic range, dB (A):                         | 66.7         | 66.9         |
| THD, %:  | 0.024        | 0.023        |
| IMD + Noise, %:                                | 0.212        | 0.213        |
| Stereo crosstalk, dB:                          | -30.9        | -31.1        |


Frequency response


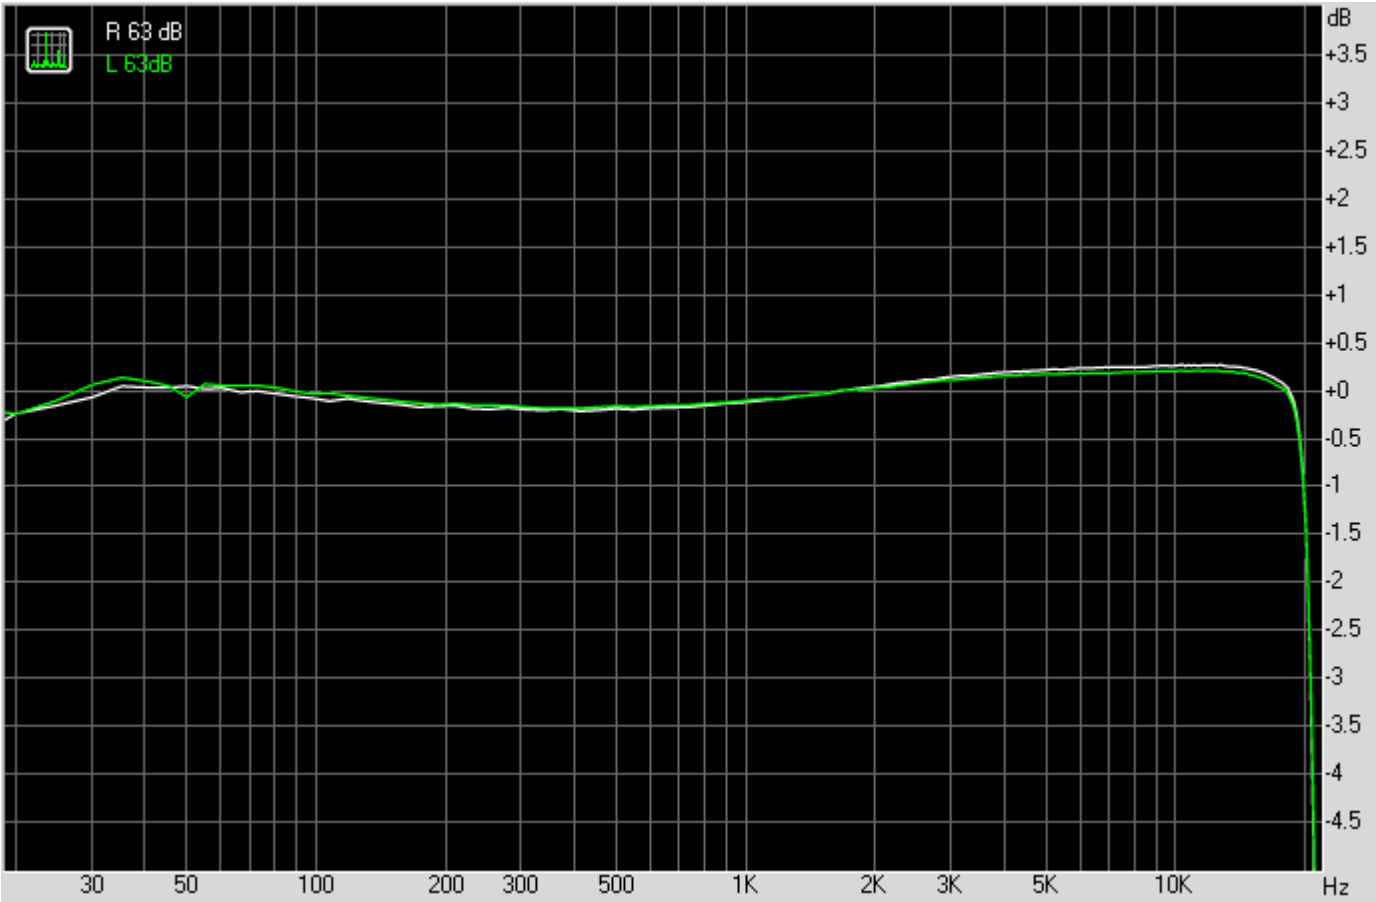


## Noise level

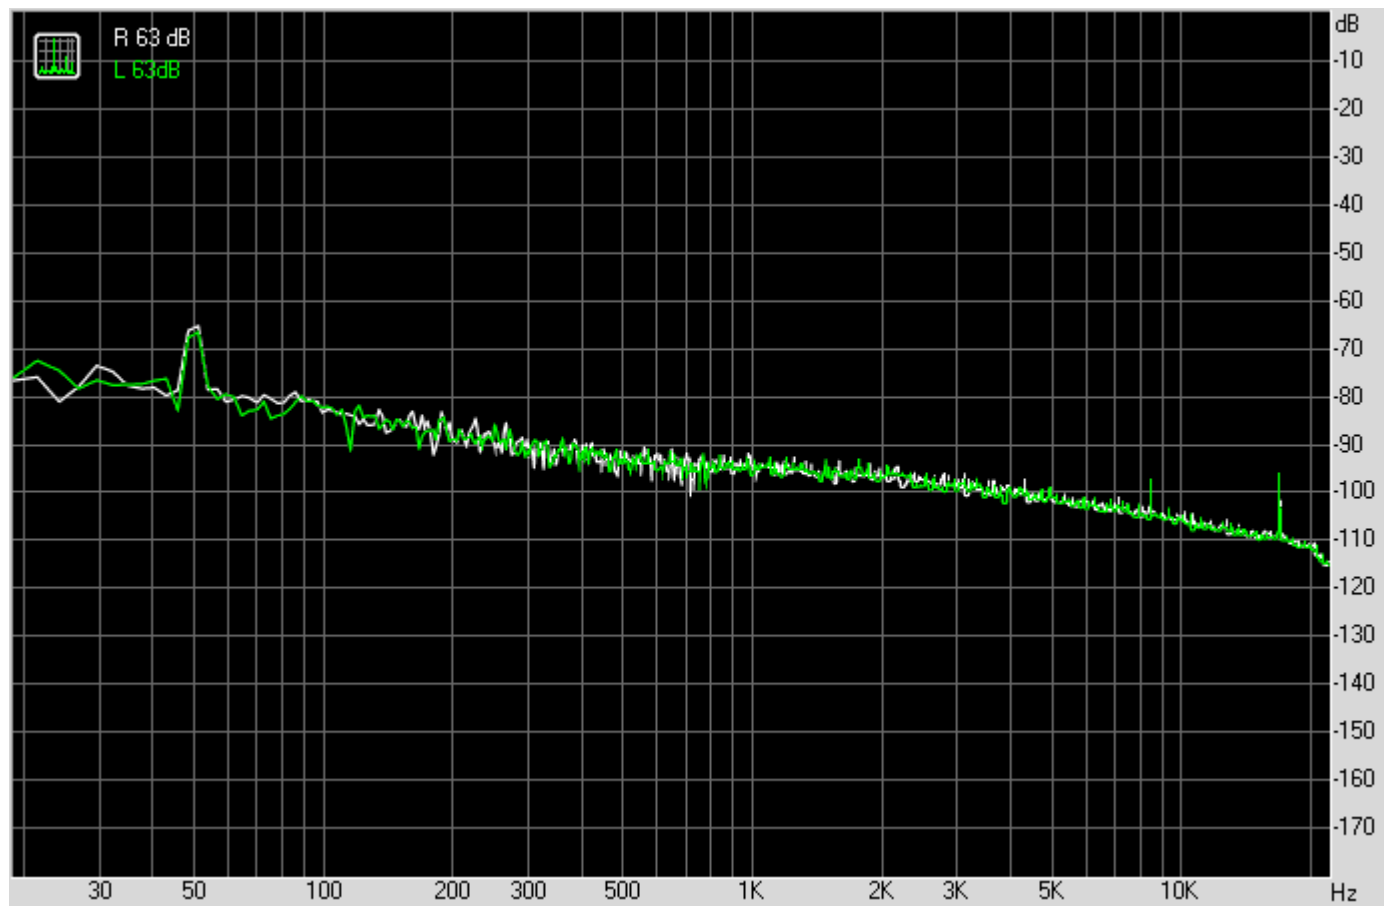


## Dynamic range

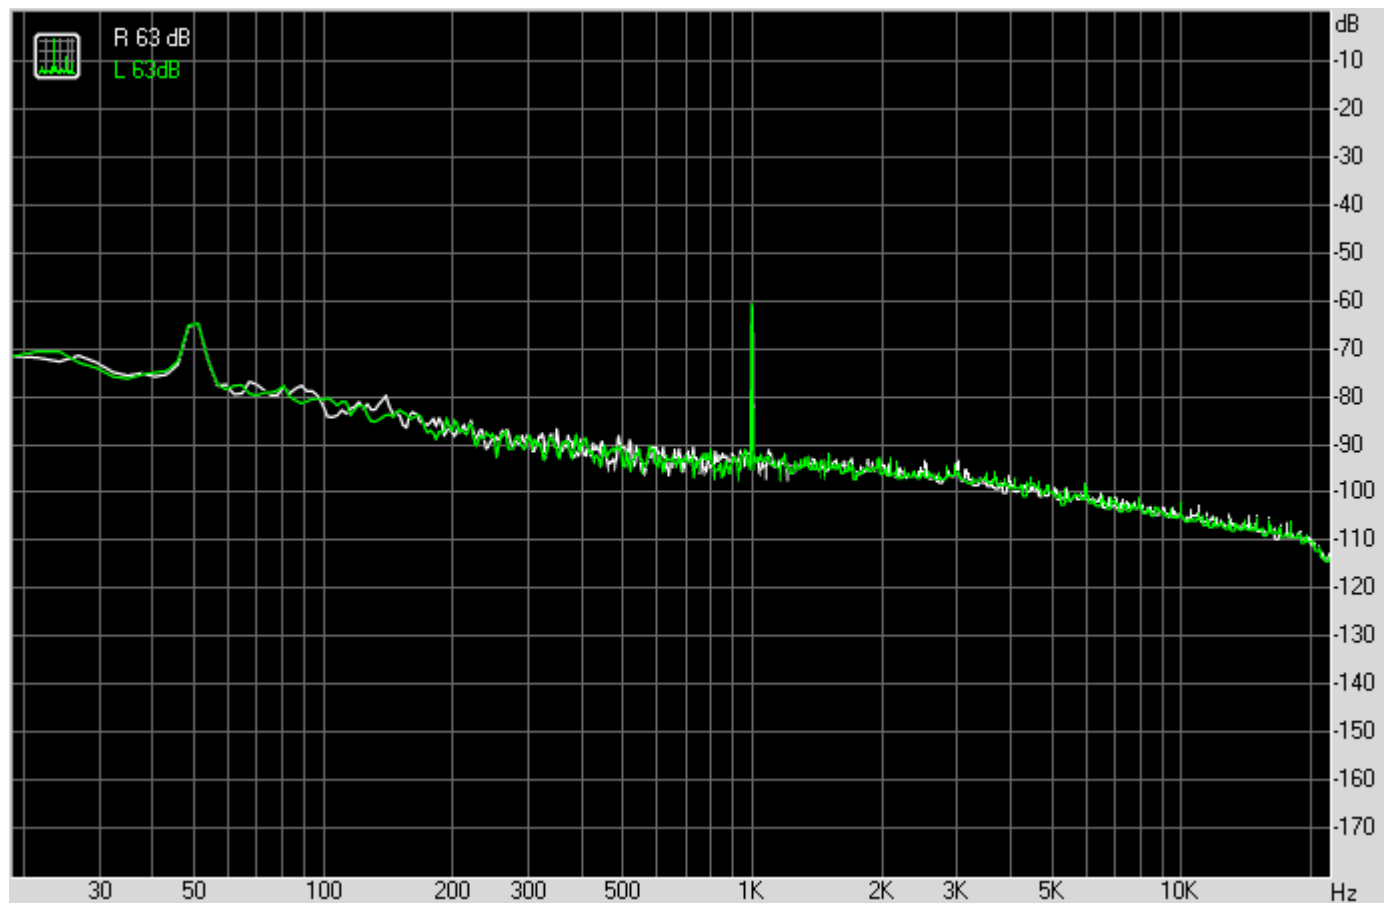

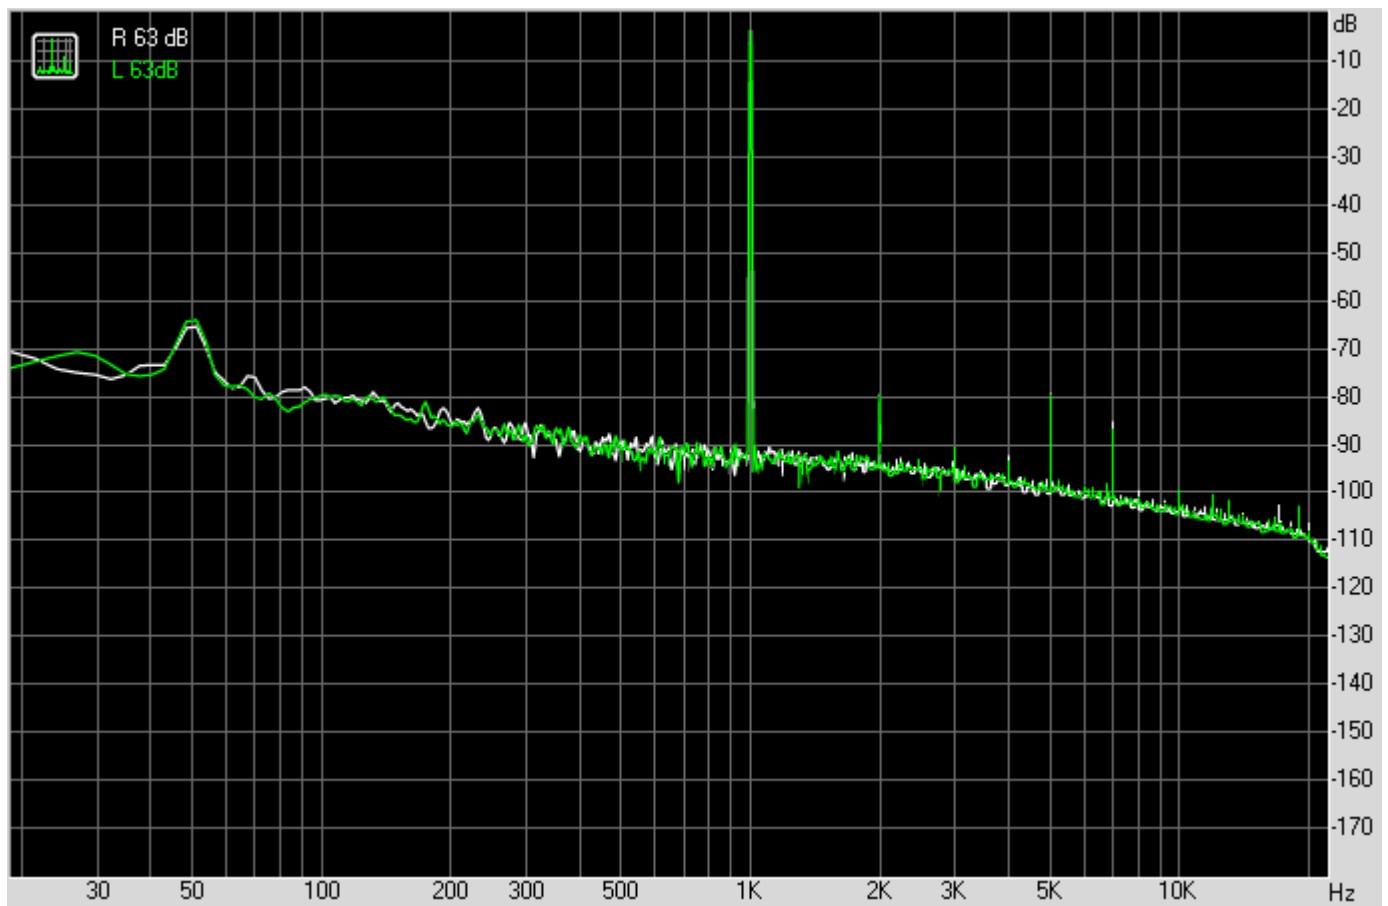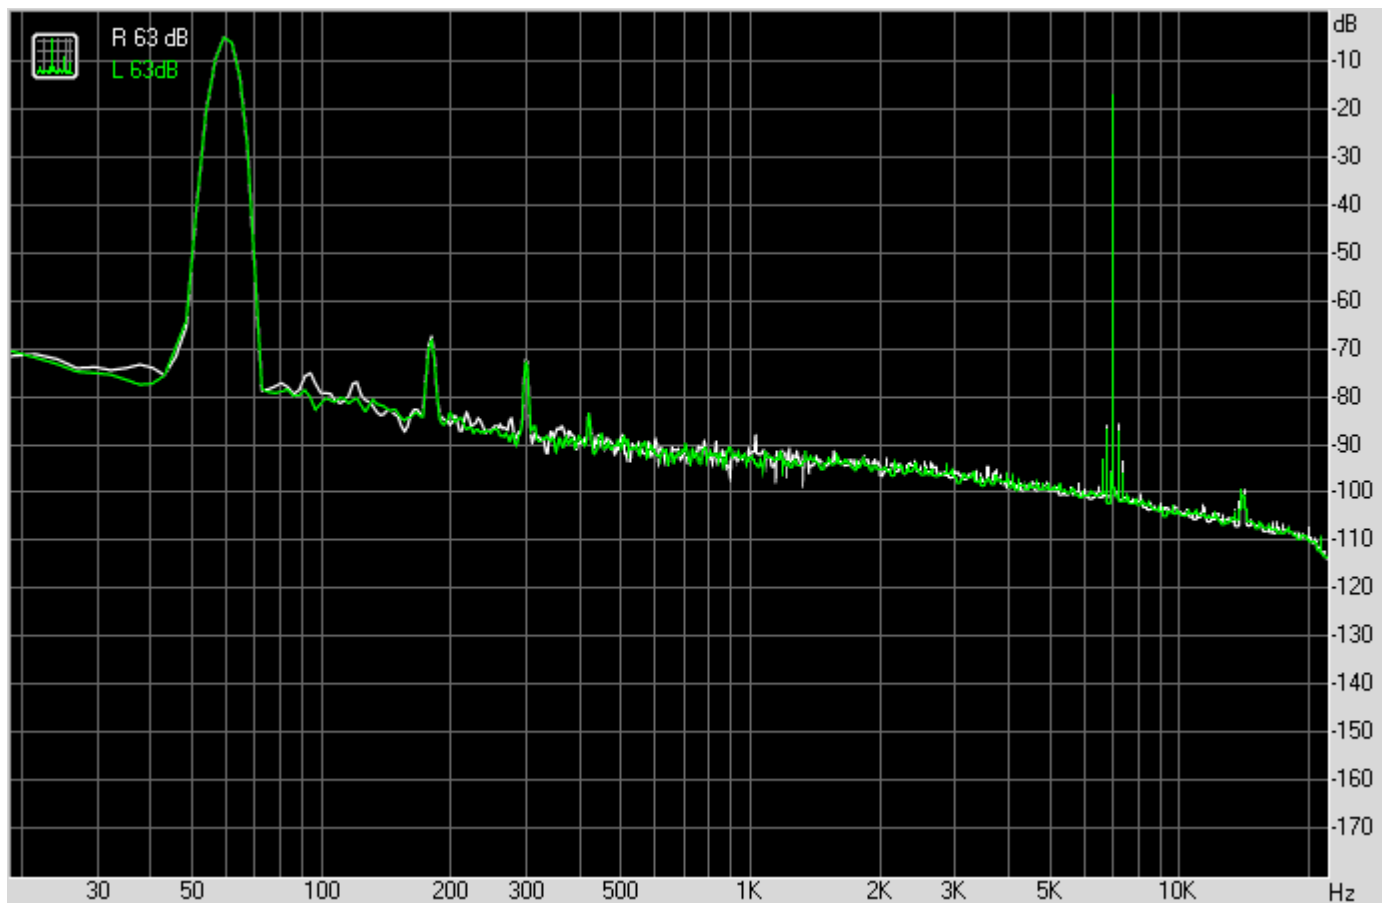**THD + Noise (at -3 dB FS)****Intermodulation distortion**

Stereo crosstalk

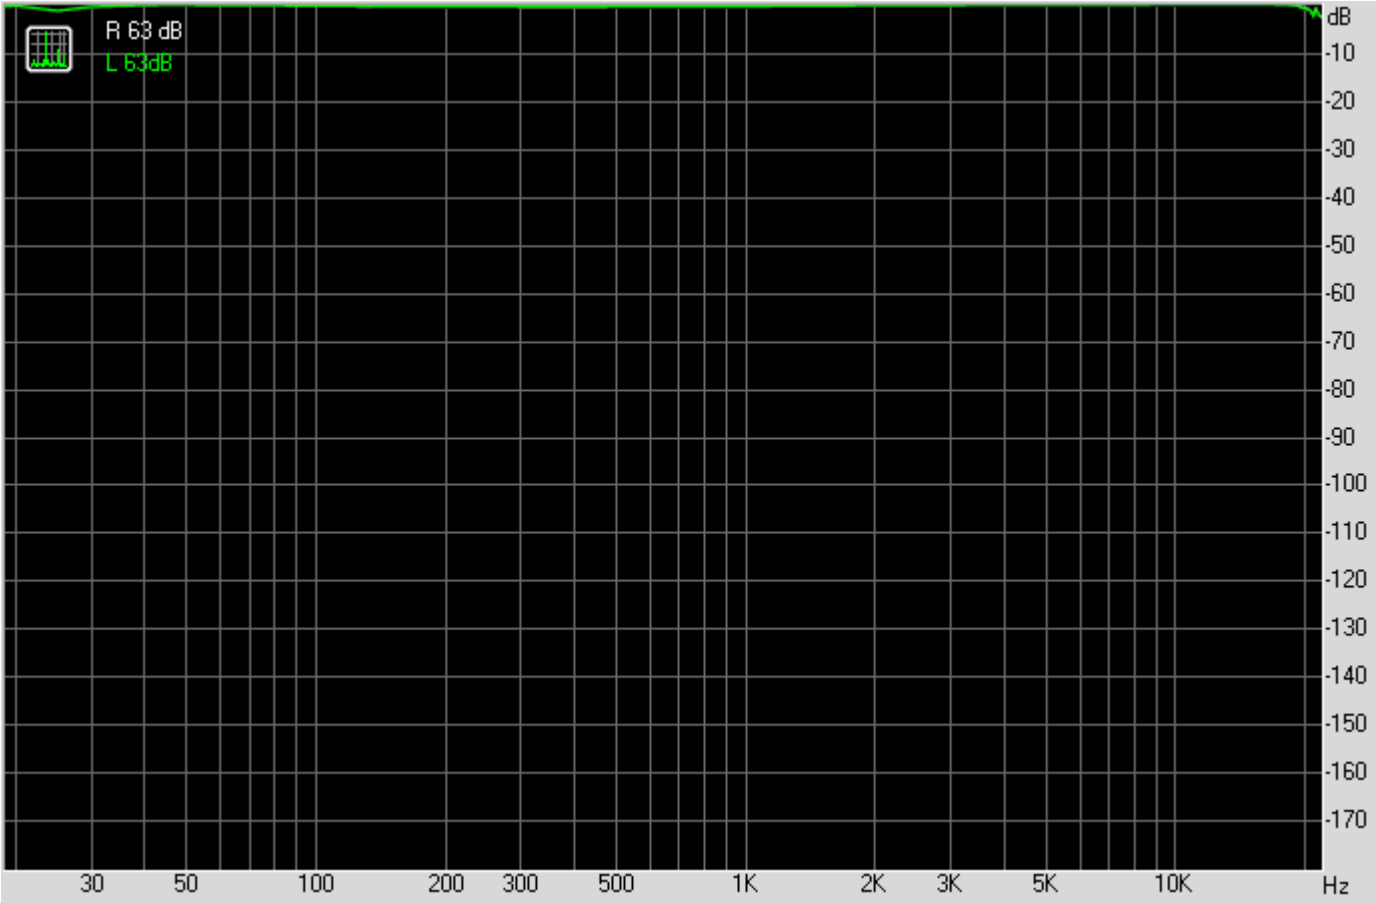

This report was generated by RightMark Audio Analyzer 6.0