


RightMark Audio Analyzer test

Testing chain: External loopback (line-out - line-in)
Sampling mode: 32-bit, 96 kHz


Summary

Test	SoundCard LoopBack	2Vpp	4Vpp	8Vpp	16Vpp	32Vpp
Frequency response (from 40 Hz to 15 kHz), dB:	+0.02, -0.06	+0.10, +0.04	+0.02, -0.04	+0.42, +0.32	-0.21, -0.39	+0.56, +0.19
Noise level, dB (A):	-90.9	-85.7	-85.7	-85.1	-86.0	-85.7
Dynamic range, dB (A):	90.8	85.6	85.5	85.1	86.1	85.6
THD, %:	0.00340	0.00968	0.029	0.027	0.032	0.039
IMD + Noise, %:	0.013	0.022	0.038	0.040	0.052	0.069
Stereo crosstalk, dB:	-0.3	-0.3	-0.4	-0.6	-0.7	-0.9


Frequency response

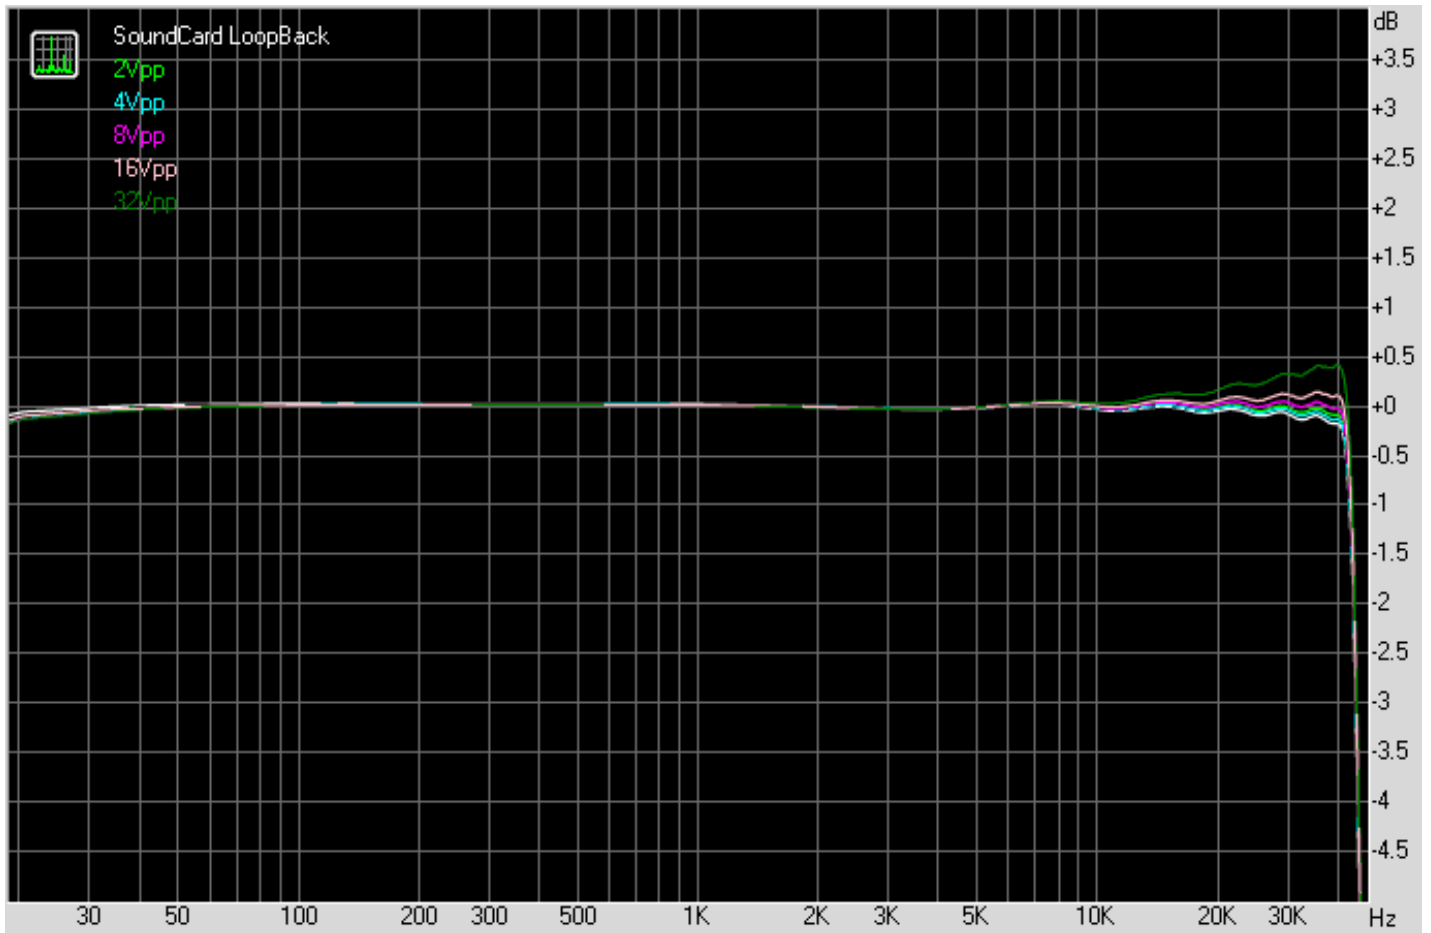


Noise level

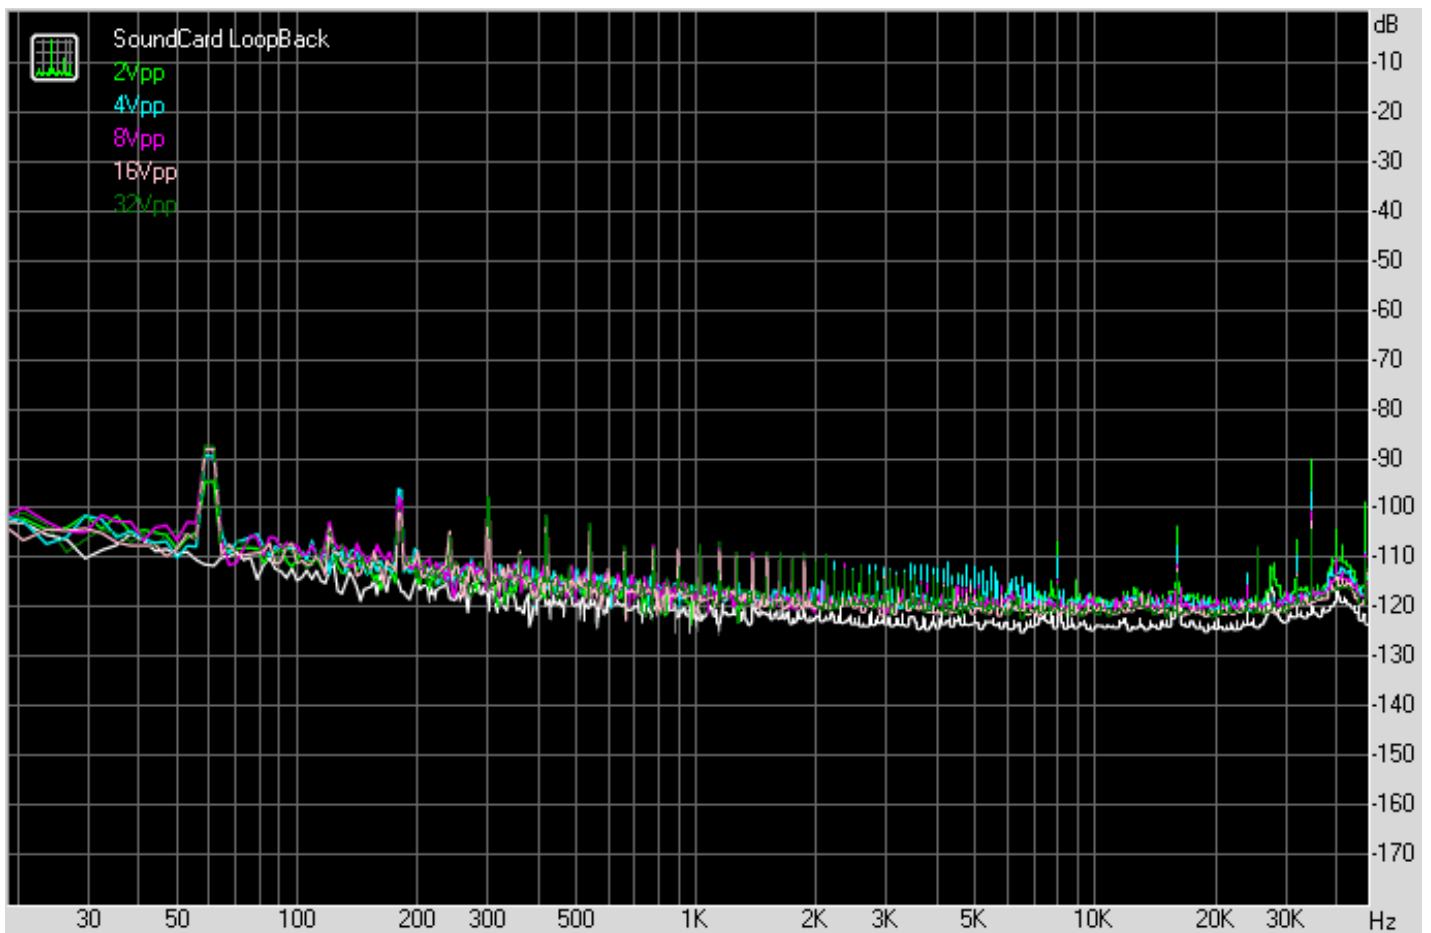


Dynamic range

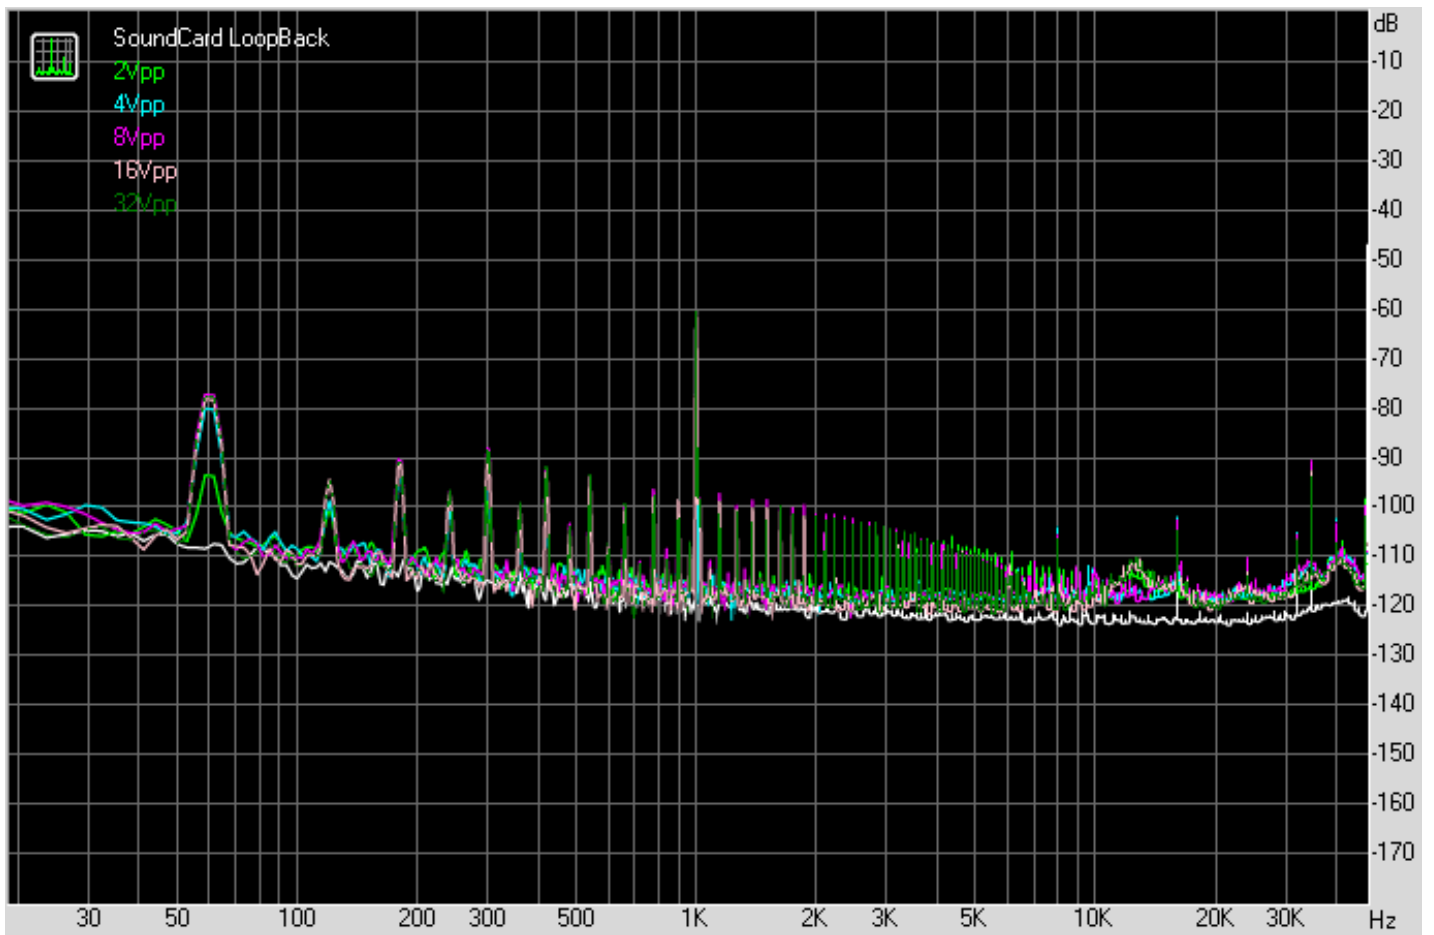

THD + Noise (at -3 dB FS)

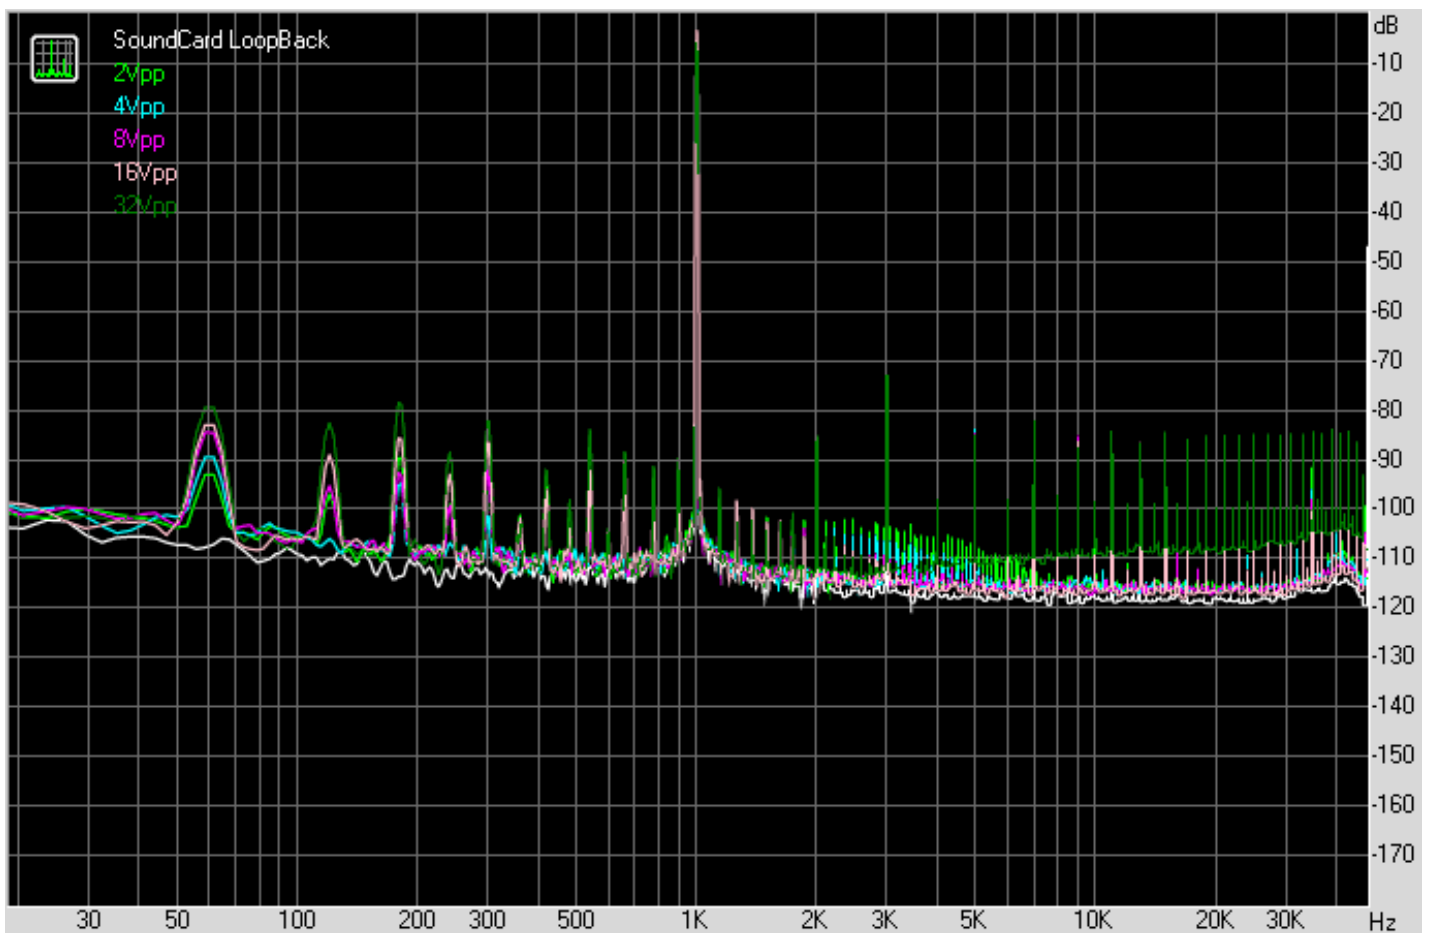

Intermodulation distortion

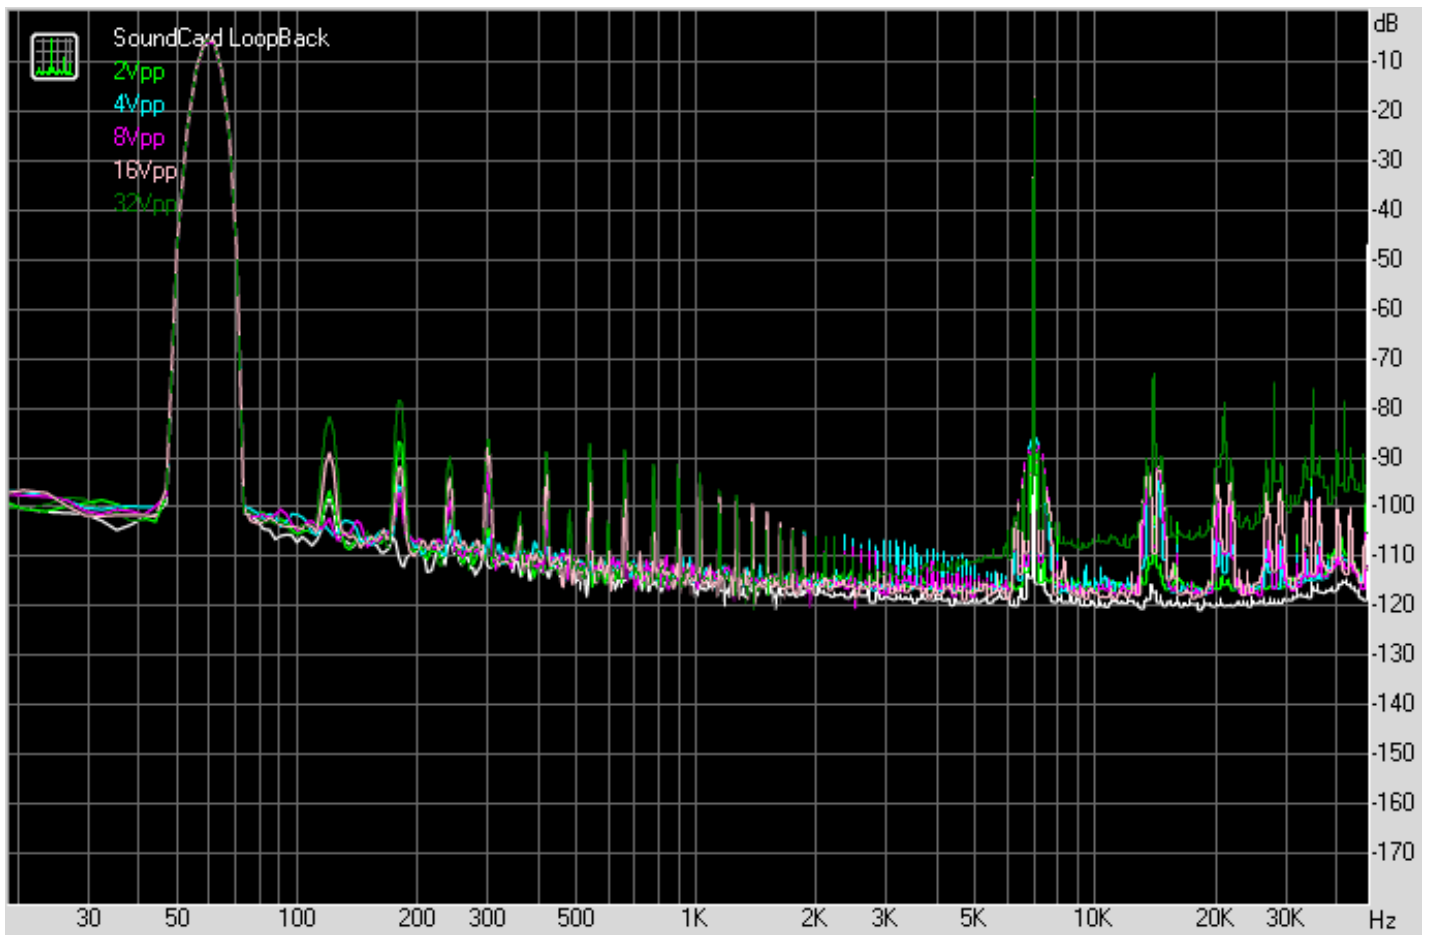

Stereo crosstalk

