



## professional loudspeakers

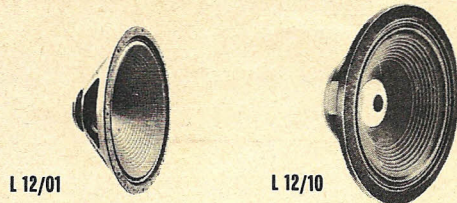


L 12/01

L 12/10




L 12/31




L 12P/03




L 12P/11




L 12P/24




L 15P/02




L 15P/03




L 15P/06




L 15P/100A




L 17/64AF



L 17P/64AF




L 18P/75




L 18P/100A

Model	Power W		Res. Freq.	Flux Density	Freq.	Imp. ohm	Coil Diam mm.	Dimension mm.		Weight Kg
	R.M.S.	Peaks						Diam.	Depth	
L10	10	16	80	10500	80 ÷ 8000	4	25	263	98	1,250
L12/01	15	30	75	11000	70 ÷ 7000	8	25	320	112	1,620
L12/10	25	40	70	12000	70 ÷ 6000	8	45	320	128	4,100
L12/31	20	30	50	12000	50 ÷ 15000	8	38	320	125	3,400
L12P/03	35	50	75	13500	75 ÷ 7000	8	45	320	135	5,200
L12P/11	75	100	45	13500	45 ÷ 10000	8	100	320	120	7,700
L12P/24	60	100	55	14500	55 ÷ 9000	8	75	320	130	6,800
L15P/02	75	100	55	13000	55 ÷ 10000	8	75	388	152	8,500
L15P/03	75	100	45	11000	45 ÷ 5000	8	75	388	152	8,500
L15P/06	100	150	25	10000	25 ÷ 3000	8	100	388	153	7,600
L15P/100A	100	150	45	13500	45 ÷ 10000	8	100	385	140	6,700
L17/64AF	50	75	50	11000	50 ÷ 5000	8	64	385	155	6,000
L17P/64AF	75	100	55	15000	55 ÷ 6000	8	64	385	180	9,000
L18P/75	75	100	40	14500	40 ÷ 5000	8	75	470	190	11,450
L18P/100A	100	150	40	13500	40 ÷ 7000	8	100	470	190	9,800

## filters




FCS 30 FCS 31 FCS 32




FC 285


Model	Cut Freq. Hz	Imp. ohm	Pow W	Dimension mm.	Weight Kg
FC285	2000 12 dB/ott.	8	100	230x155x55	400
FCS30	5000-12 dB/ott.	8	30	180x140x 35	650
FCS31	2000-12 dB/ott.	8	30	180x140x 35	650
FCS32	500/5000-12 dB/ott.	8	30	180x140x 35	650




H 2015



H 2010



H 4823



H 6422


Model	Drivers to suit	Cut Freq. Hz	Angle Dispersion Hor. Vert.	Dimension mm.	Weight Kg
H2010	TW15-TW25-TW50	800	110° 40°	200x100x158	0,440
H2015	TW15-TW25-TW50	800	120° 40°	200x150x192	0,680
H4823	TW25-TW50	400	90° 40°	235x485x375	4,000
H6422	TW101	300	90° 55°	730x246x522	

## hi-fi loudspeakers


### WOOFERS




L5/01  
L5P/02




L8/01  
L8P/04



L10P/07




L12P/13




L12 passivo  
L15 passivo


### PRESSURE DRIVERS




TW15



TW25



TW50




TW101


### DIRECT RADIATOR




TW2




MR45




TW10




TW103



TW105




MR8/02




MR/5

### HORN RADIATOR

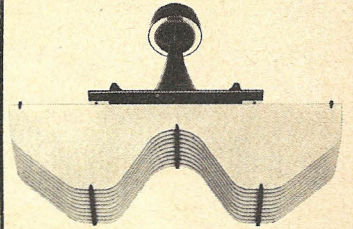


TW 200 With light acoustics in nine elements



TW 201 With light acoustics in nine elements

## horns



A1361

Adaptors for H 6422. A unit with standard thread.



A1362

Adaptors for H 6422. A unit with standard thread.