


VII Audio SEWA Rev.A

One Transistor, Single Ended Class A, Seven Watt Power Amplifier

0dB Gain

No Global Negative Feedback

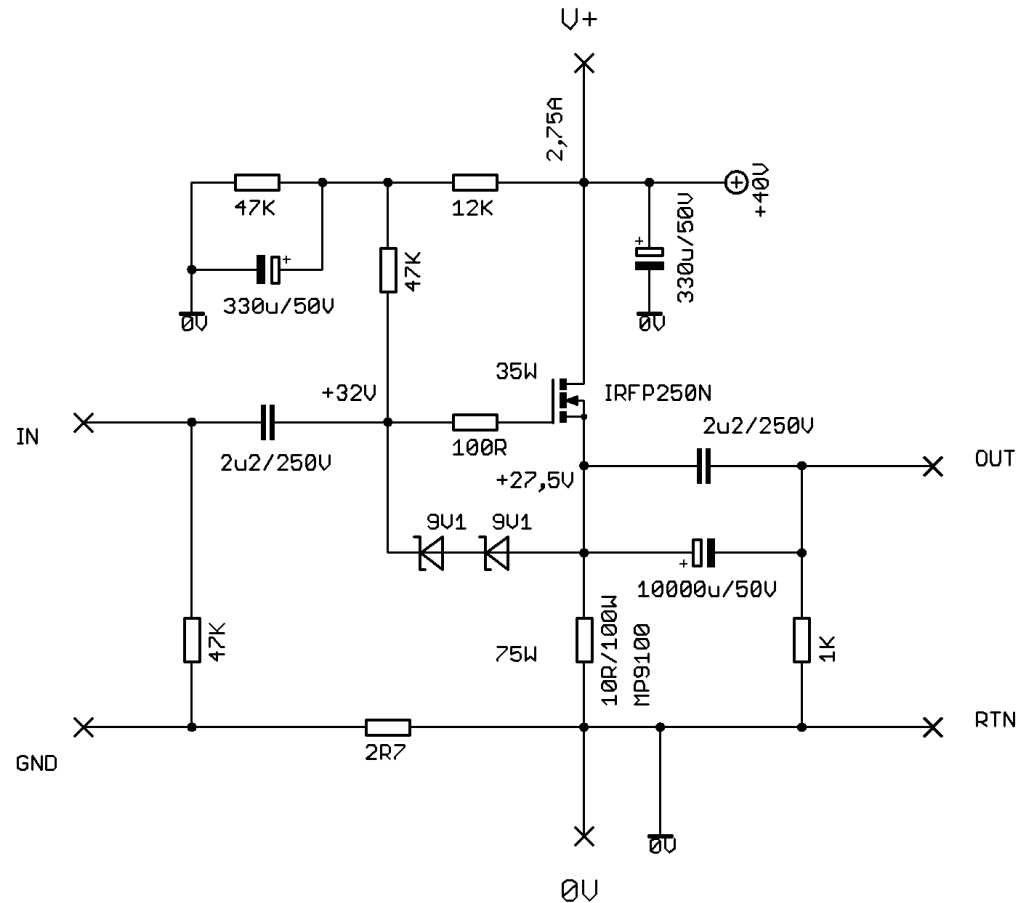

Mosfet and Power Resistor mounted on (minimum) 0,25°C/W heatsink

110W Continuous Power Consumption

Preamp requirements: -Minimum 7V RMS output
-Maximum 1K output impedance

(C) 2005 VII Audio
(C) 2005 Mads K Hoaas

SEWARevApub	
27.10.2005 20:25:04	
Sheet: 1/1	