




00K3515E026

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

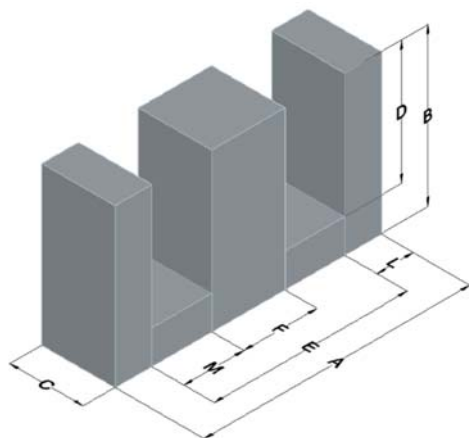

Kool M μ Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
26	56 \pm 8%	XXXXXX	K3515E026

	Dimensions		Tolerance (\pm)			Packaging
	(mm)	(in)	(mm)	(in)		
A	34.54	1.360	0.508	0.020		Box Qty= 840 pcs
B	14.2	0.557	0.229	0.009		
C	9.35	0.368	0.178	0.007		
D	9.60	0.378	-	-	Min	Available Hardware
E	25.2	0.995	-	-	Min	PCB3515M1
F	9.32	0.367	0.203	0.008		PCB3515M2
L	4.45	0.175	-	-	Nom	00B351501
M	7.87	0.310	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (Ea. Piece) (g)
1800	80%	9	151	84.0	69.4	5830	16
	75.7						

Notes:	Temperature Rating
	Curie Temp: 500°C

Typical DC Bias Performance

