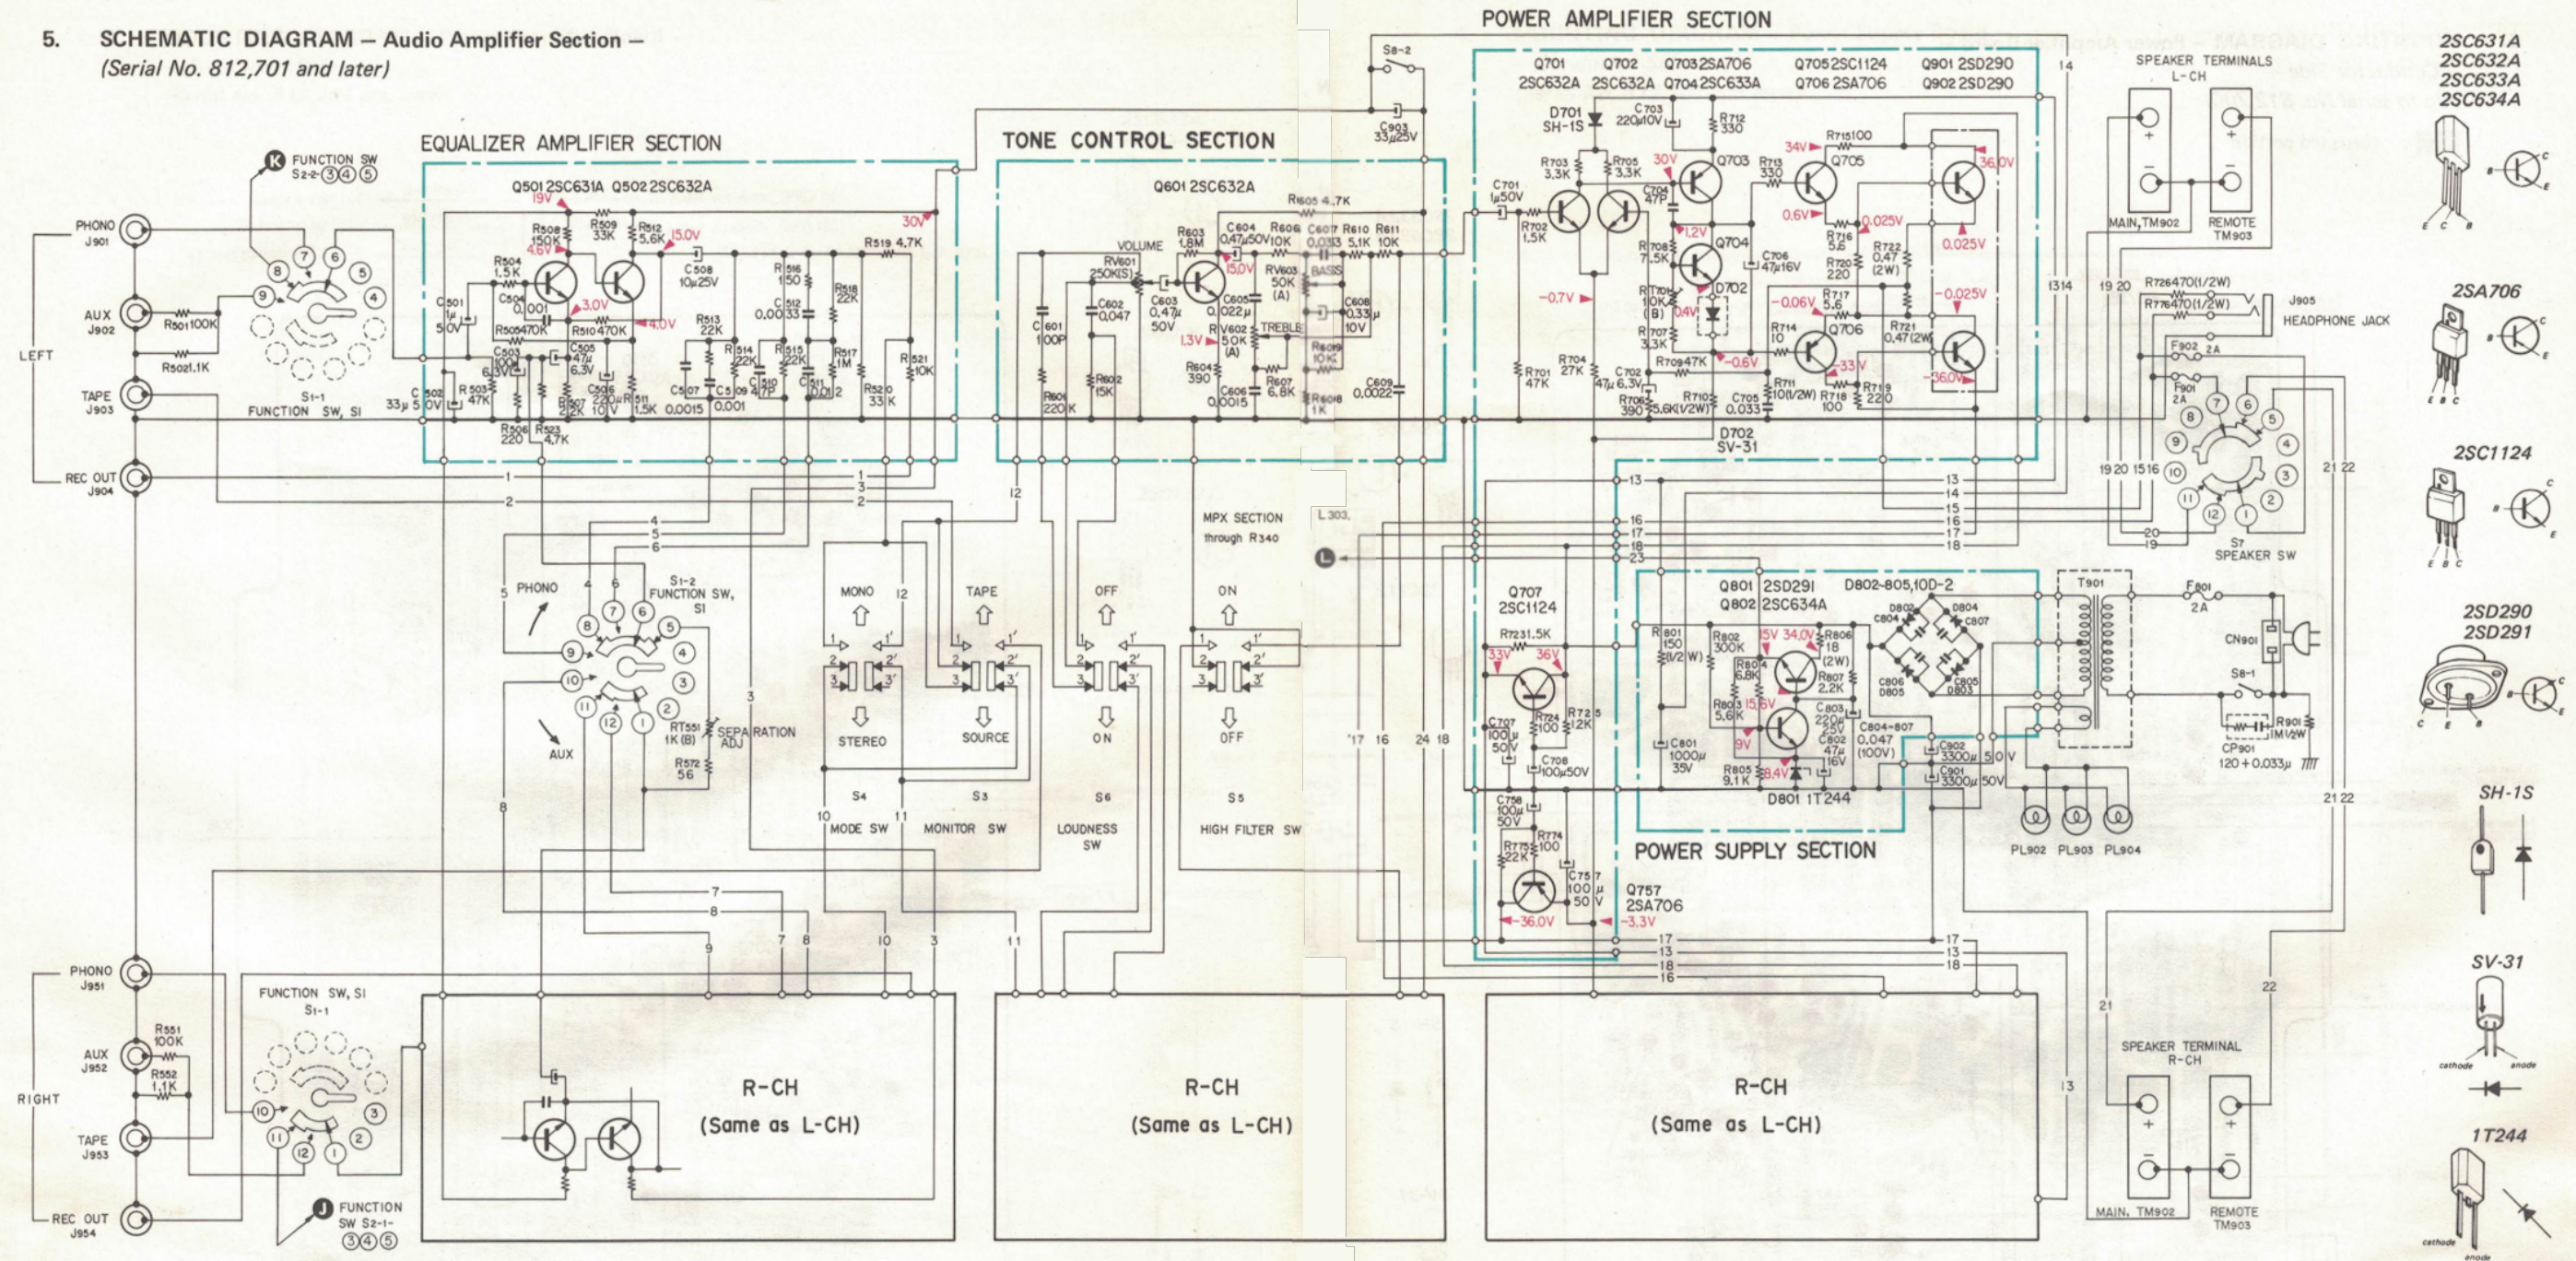


PRODUCTION CHANGE

5. SCHEMATIC DIAGRAM — Audio Amplifier Section —
(Serial No. 812,701 and later)

2SC631A
2SC632A
2SC633A
2SC634A

2SA706

2SC1124

2SD290
2SD291

SH-1S


SV-31

1T244


10D2

Ref. No.	Description	Position	Ref. No.	Description	Position
S1	FUNCTION (1) SW (AUX-FUNCTION (2)-PHONO)	FUNCTION (2)	S4	MODE SW (STEREO-MONO)	STEREO
S2	FUNCTION (2) SW (FM AUTO STEREO-FM MONO-AM)	FM AUTO STEREO	S5	HIGH FILTER SW	OFF
S3	MONITOR SW (SOURCE-TAPE)	SOURCE	S6	LOUDNESS SW	ON
			S7	SPEAKER SW (REMOTE-OFF-MAIN-BOTH)	BOTH
			S8	POWER SW	OFF

ROTARY SWITCH INDEX

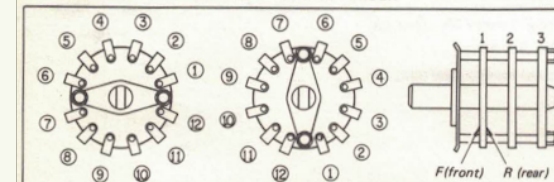

LEVER SWITCH INDEX

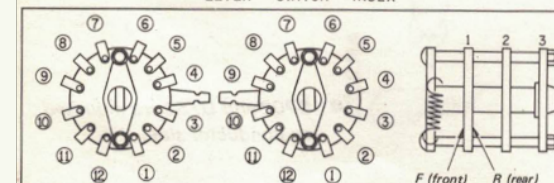

Note:

All resistance values are in ohms. k = 1000, M = 1000 k.
All capacitance values are in μF except as indicated with p, which means μF .

All voltages are dc measured with a VOM which has an input impedance of 20 k ohms/volt. No signal in.
Voltage variations may be noted because of normal production tolerances.