



ST-220 PROFESSIONAL STEREO TONE ARM

FOR BROADCAST APPLICATIONS

USING HIGH COMPLIANCE CARTRIDGES



FEATURES

CONSTRUCTION: Light alloy arm, with low-mass cartridge shell

MOUNTING: 7/8" diameter single hole, 1" long threaded shank

ROTATION: Miniature precision ball bearing


LATERAL BALANCE: Adjustable, to compensate for variations in center of gravity between various cartridges

TRACKING FORCE ADJUSTABLE: Movable weight, with locking screw, adjusts tracking force for any cartridge

ARM HEIGHT ADJUSTABLE: Locking screws on shafts of arm and rest adjust height of arm from 40-60 mm (1-9/16" - 2-3/8")

CARTRIDGE SHELL REMOVABLE: Uses international standard 4 pin connector

CONNECTING CABLE PLUG-IN: 5' cable plugs into base of arm, has color-coded phono plugs and ground wire

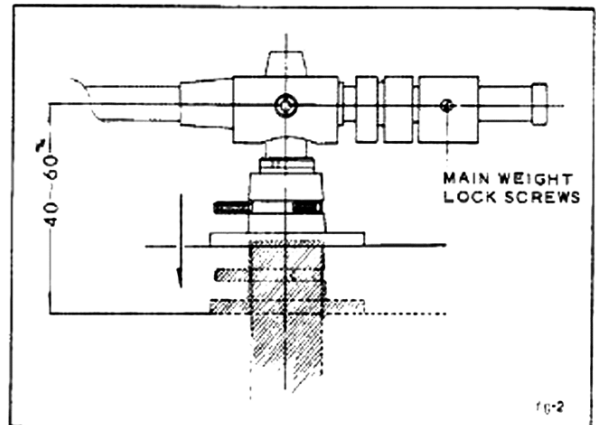

SPECIFICATIONS

TOTAL LENGTH 310 mm (12-13/32")

EFFECTIVE LENGTH 220 mm (8-21/32")

OVERHANG 15 mm (19/32")

OFFSET ANGLE 22°

LATERAL BALANCE Adjustable, all cartridges

STYLUS PRESSURE ... Adjustable, 1-6 grams recommended, depending on cartridge

TRACKING ERROR + 4°, - 1°

