


### FEATURES

- Large voice coil provides high efficiency power and low distortion
- Made in USA
- Natural sounding paper cone


### PARAMETERS

Impedance	8 ohms
Re	6.4 ohms
Le	1.97 mH @ kHz
Fs	43.7 Hz
Qms	8.58
Qes	0.41
Qts	0.39
Mms	48.1g
Cms	0.28 mm/N
Sd	339.8 cm <sup>2</sup>
Vd	186.9 cm <sup>3</sup>
BL	14.3 Tm
Vas	48.1 liters
Xmax	5.5 mm
VC Diameter	64 mm
SPL	92.7 dB @ 2.83V/1m
RMS Power Handling	250 watts
Usable Frequency Range (Hz)	35 - 3,000 Hz

### IMPEDANCE/PHASE

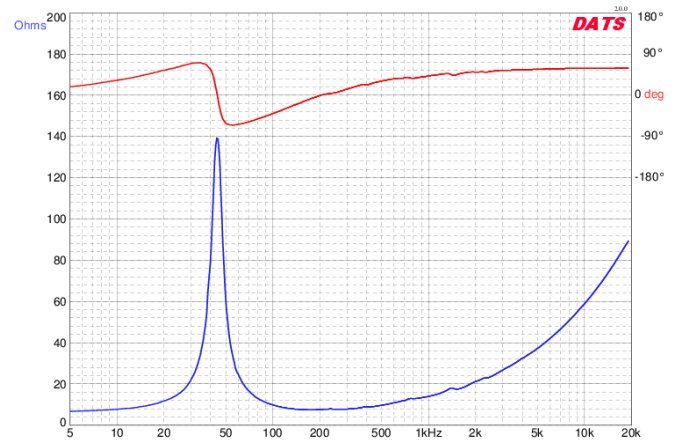

### FREQUENCY RESPONSE

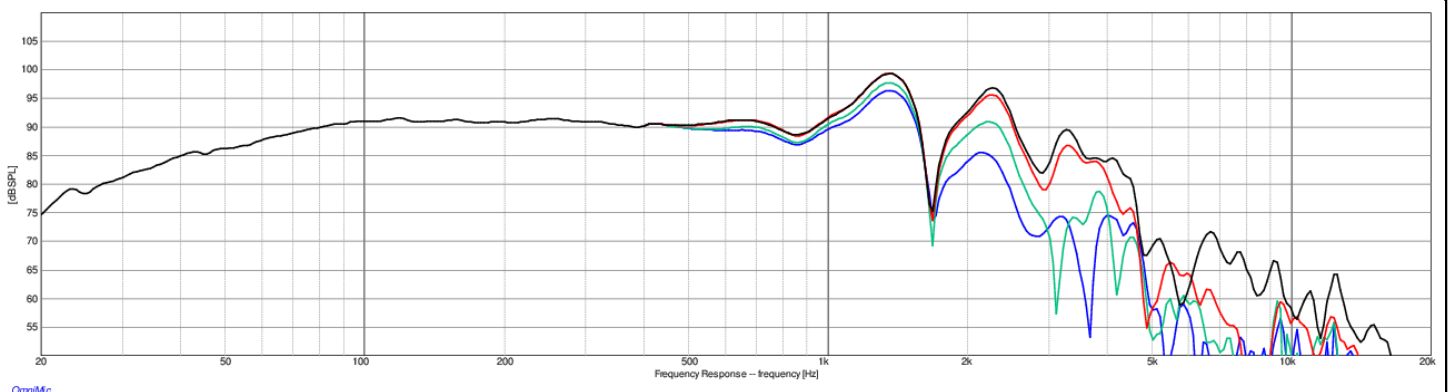

**Note:** 1/24<sup>th</sup> octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°