



Vented?	V_b (ft³)	D_{port} (in.)	L_{port} (in.)	F_b (Hz)	F_3 (Hz)	Transfer Function Peak (dB)	F_{peak} (Hz)	Speaker
N	0.286	0.000	0.00	-	95.4	0.4	215	TEBM65C20F-8
Y	0.286	1.000	4.00	39.5	75.1	1.9	135	TEBM65C20F-8
Y	0.286	1.250	4.00	48.3	43.2	2.3	139	TEBM65C20F-8
Y	0.286	1.375	4.00	52.6	46	2.6	133	TEBM65C20F-8
Y	0.286	1.500	4.00	56.8	48.8	2.8	125	TEBM65C20F-8

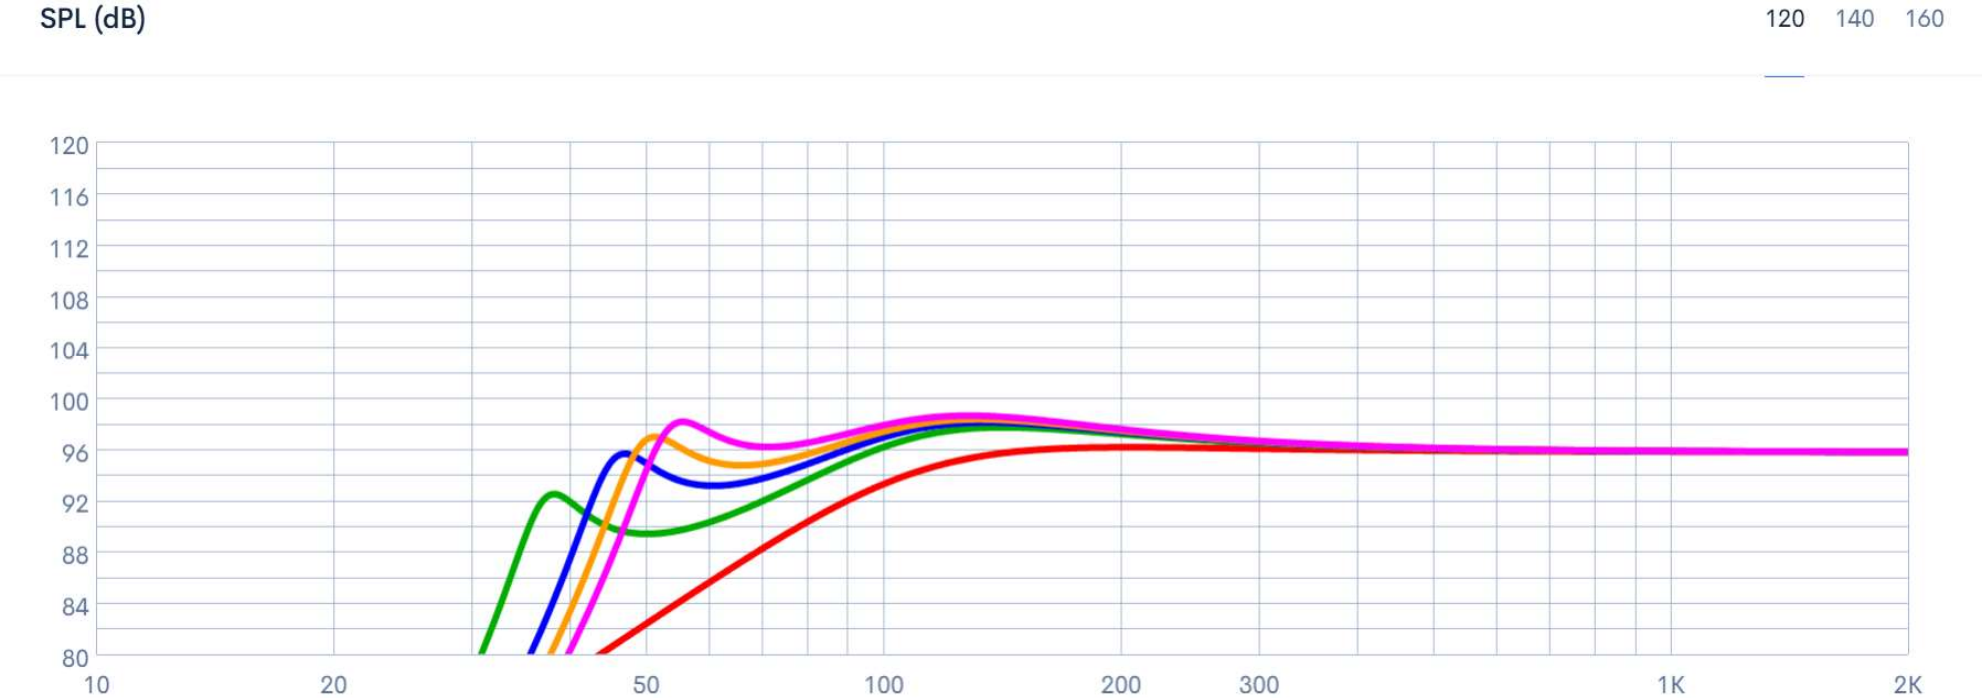

Vented?	V_b (ft³)	D_{port} (in.)	L_{port} (in.)	F_b (Hz)	F_3 (Hz)	SPL Peak (dB)	F_{peak} (Hz)	Speaker
N	0.286	0.000	0.00	-	95.4	96.1	200	TEBM65C20F-8
Y	0.286	1.000	4.00	39.5	75.1	97.7	140	TEBM65C20F-8
Y	0.286	1.250	4.00	48.3	43.2	98.1	130	TEBM65C20F-8
Y	0.286	1.375	4.00	52.6	46	98.3	130	TEBM65C20F-8
Y	0.286	1.500	4.00	56.8	48.8	98.6	130	TEBM65C20F-8

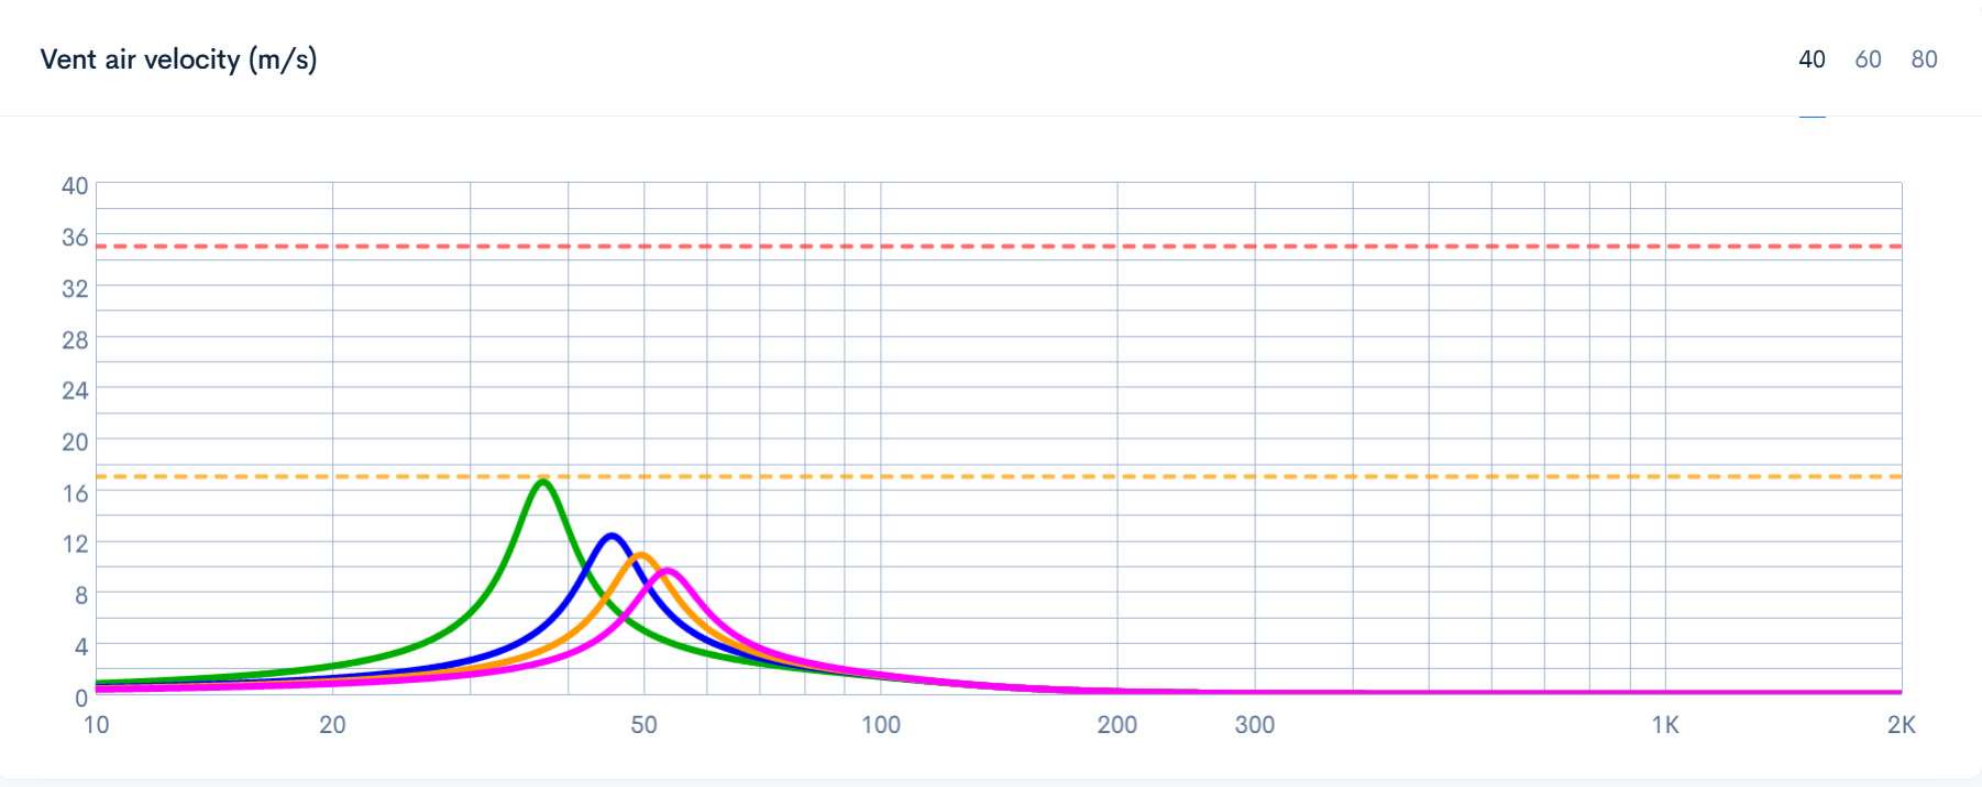

Vented?	V _b (ft ³)	D _{port} (in.)	L _{port} (in.)	F _b (Hz)	F3 (Hz)	Peak Vent Air Vel. (m/s)	F _{peak} (Hz)	Speaker
N	0.286	0.000	0.00	-	95.4	-	-	TEBM65C20F-8
Y	0.286	1.000	4.00	39.5	75.1	16.5	37	TEBM65C20F-8
Y	0.286	1.250	4.00	48.3	43.2	12.4	45	TEBM65C20F-8
Y	0.286	1.375	4.00	52.6	46	10.9	49	TEBM65C20F-8
Y	0.286	1.500	4.00	56.8	48.8	9.6	53	TEBM65C20F-8