


# Outboard Acopian +/- 15Vdc 100mA linear regulator (CORRECTED 3/20/2025)

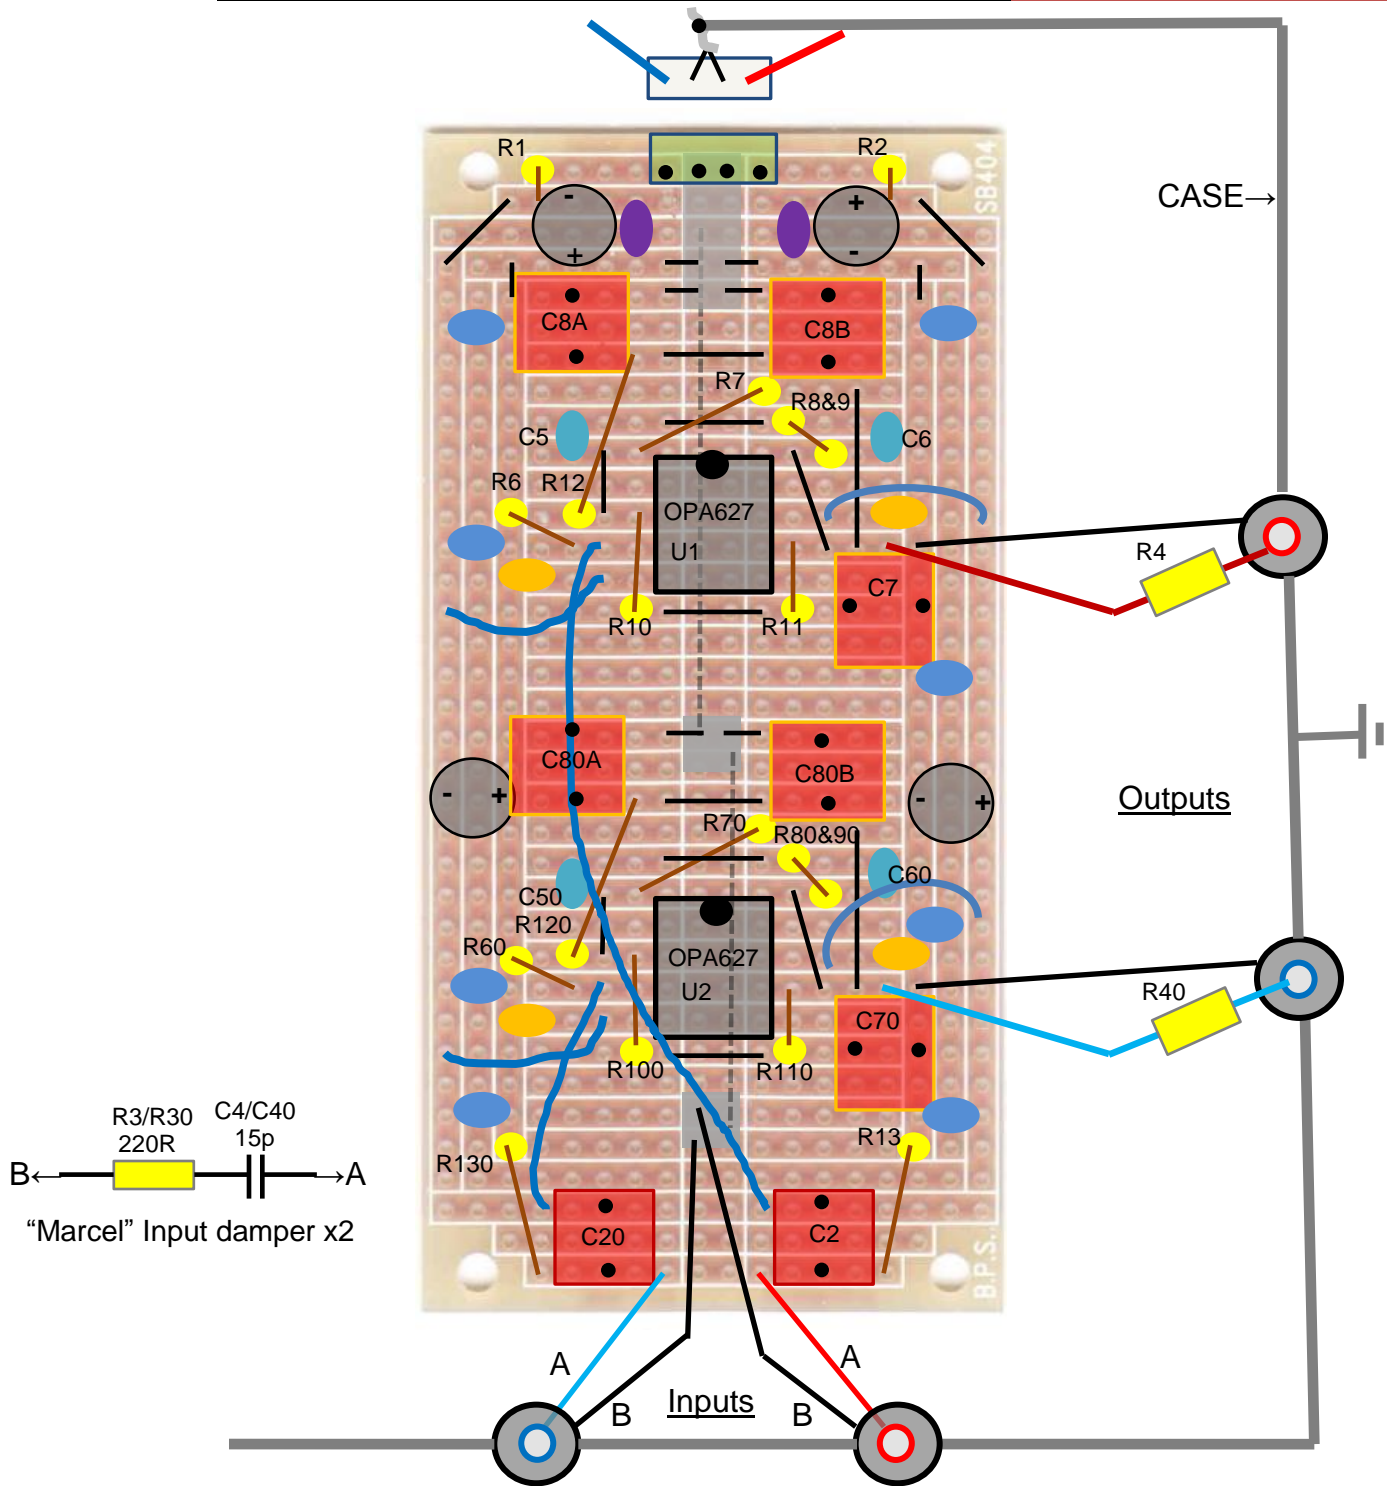

- = component lead
- = bare wire
- = insulated wire
- = vertical R
- = horizontal R
- 6.8uF = 8.5 x 7.2mm WIMA
- = JST 4-way header
- = NP0/COG
- = 100uF
- = backside solder flood
- 2.2uF = 7.2 x 7.2mm WIMA
- = 0.1u X7R
- = 1.0u X7R
- = 2.2u X7R
- = Backside Gnd bus