










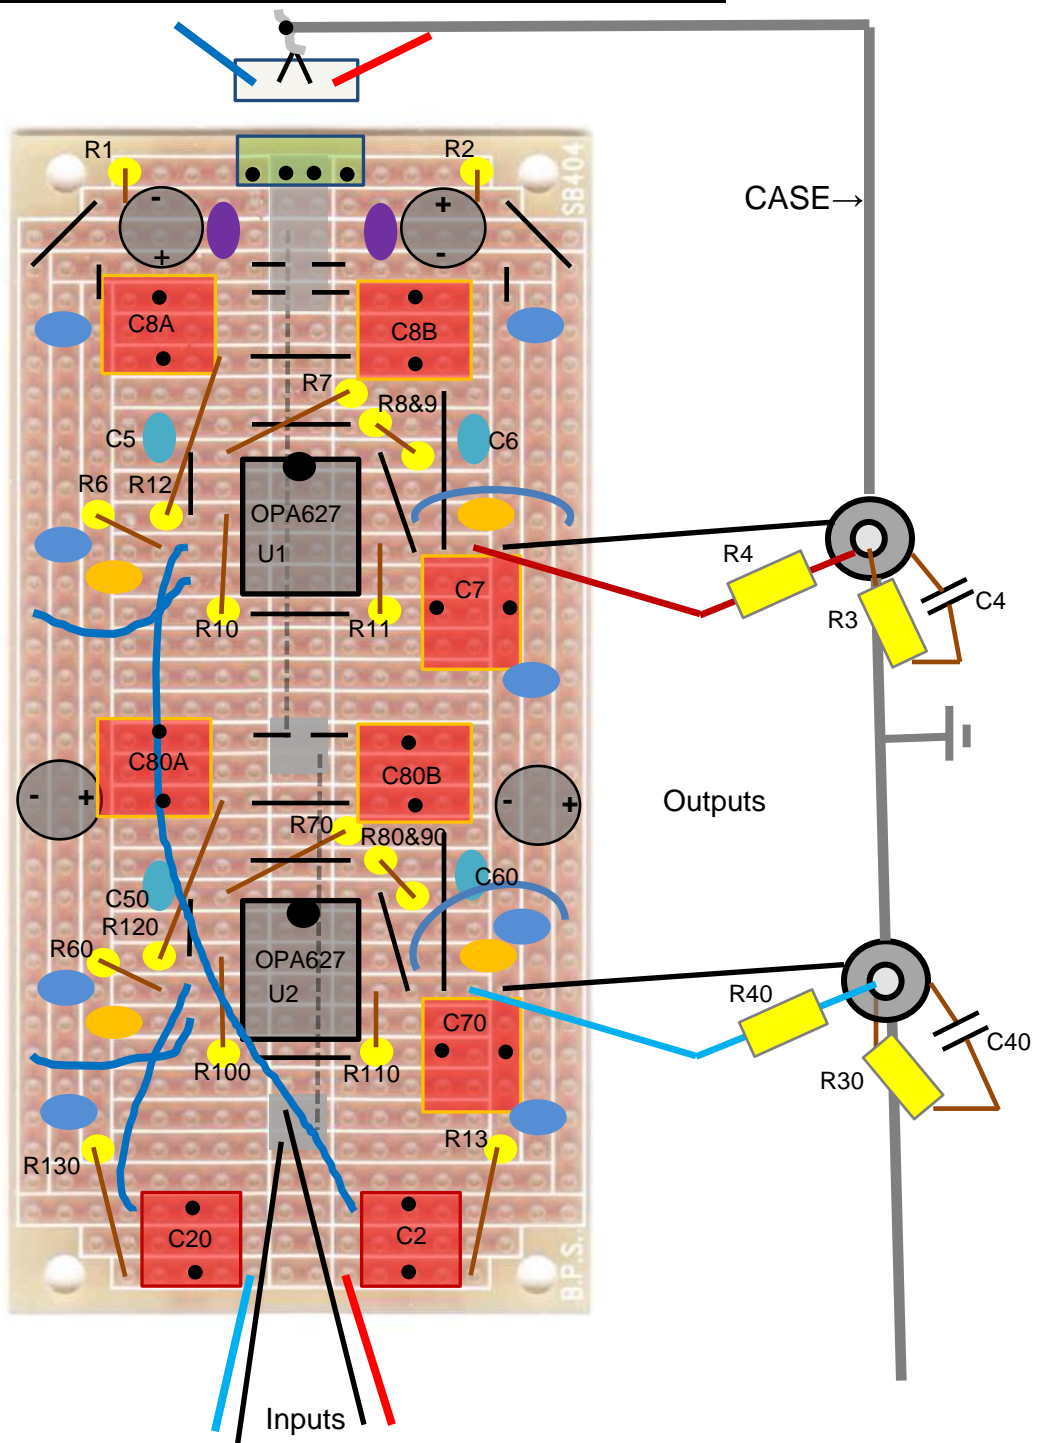






Outboard Acopian +/- 15Vdc 100mA linear regulator



-  = component lead
  = bare wire
  = insulated wire
 = vertical R
 = horizontal R
 = 8.5 x 7.2mm WIMA
 = JST 4-way header
 = NP0/COG
 = 100uF
 = backside solder flood
 = 7.2 x 7.2mm WIMA
 = 0.1u X7R
 = 1.0u X7R
 = 2.2u X7R
 = Backside bus