

# Mark Fenlon's



## Tweeter No.3



Great Value 1" silk dome flat response tweeter operating to 30-kHz. Tweeter No.3 is a step ahead of most other high frequency drivers in its class. Beyond 20-kHz, the sound delivery is linear and smooth.

The satin finish is pleasing with a "professional" look. The unit comes complete with its own seal for easy installation. Suitable for Hi-Fi and Home Theatre multi-way applications.

## Mark Fenlon's Tweeter No.3 - Data.

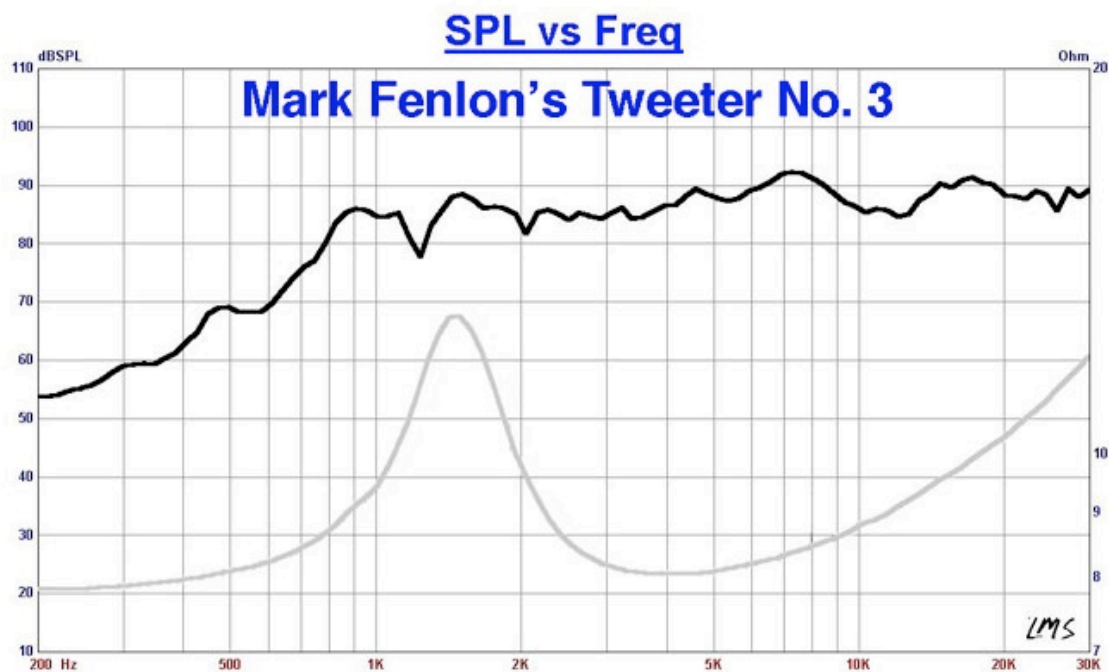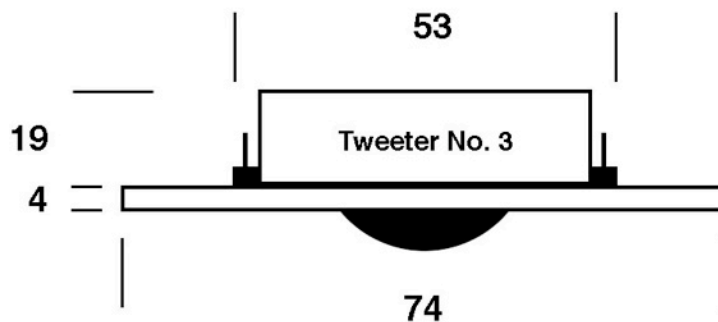

### Specification:

1" (25.4mm) silk dome emitter.

Resonance F = 1500Hz

Power rating = 20 Watts (40 max)

Rohs compliant

ACR = 8 Ohm

Range to 30=kHz

VC dia = 25.mm

Recommended min. LF filtering = 2.2uF

DCR = 7.2 Ohm

SPL = 92dB @1w/m2

Weight (nett) = 12.3g

©Mark Fenlon Oct. 2009

All rights reserved. No reproduction of anykind without the written permission of Mark Fenlon Trading. This information is correct at time of publication, may vary without notice.