




Hypex Electronics BV
 Kattegat 8
 9723 JP Groningen, The Netherlands
 +31 50 526 4993
 info@hypex.nl

Amplifier signal input wiring

Typical input wiring UcD amplifier (unbalanced).

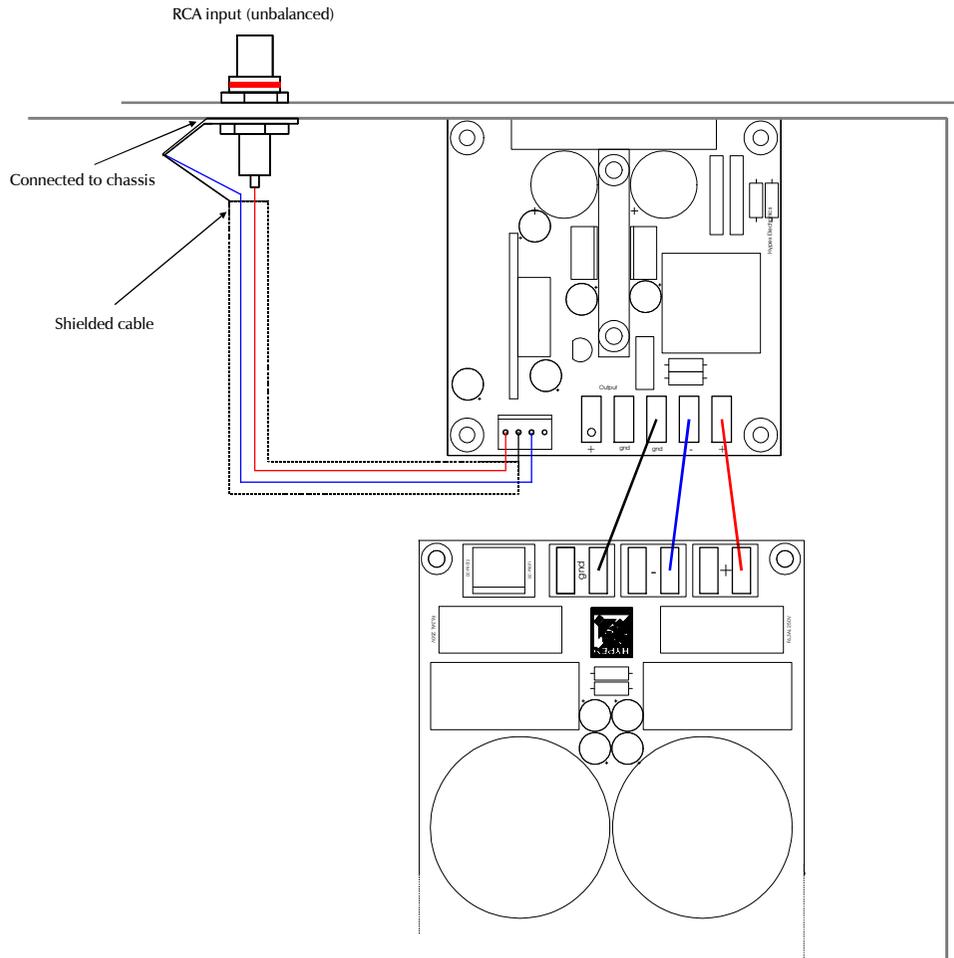


When using RCA inputs do NOT connect chassis to safety earth to avoid ground loops. Amplifier must be build according to double insulation safety standards.

Hypex **UCD™** - Series




Hypex Electronics BV
 Kattegat 8
 9723 JP Groningen, The Netherlands
 +31 50 526 4993
 info@hypex.nl

Typical input wiring UcD amplifier (balanced). Recommended.

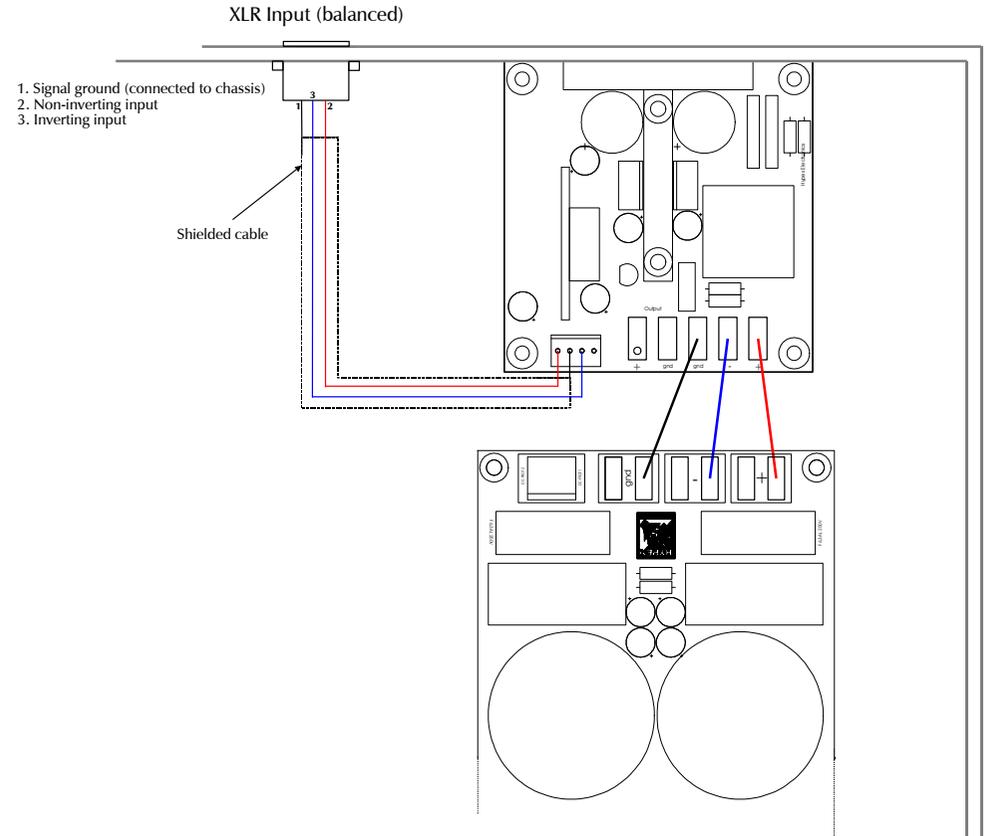

Interfacing unbalanced source / balanced amplifier.

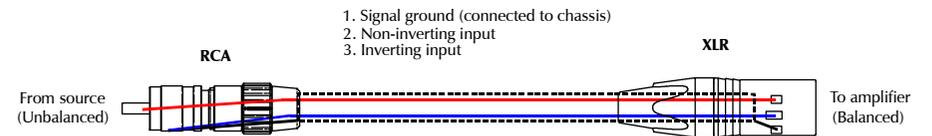

Hypex **UCD™** - Series