




Enceinte TQWT

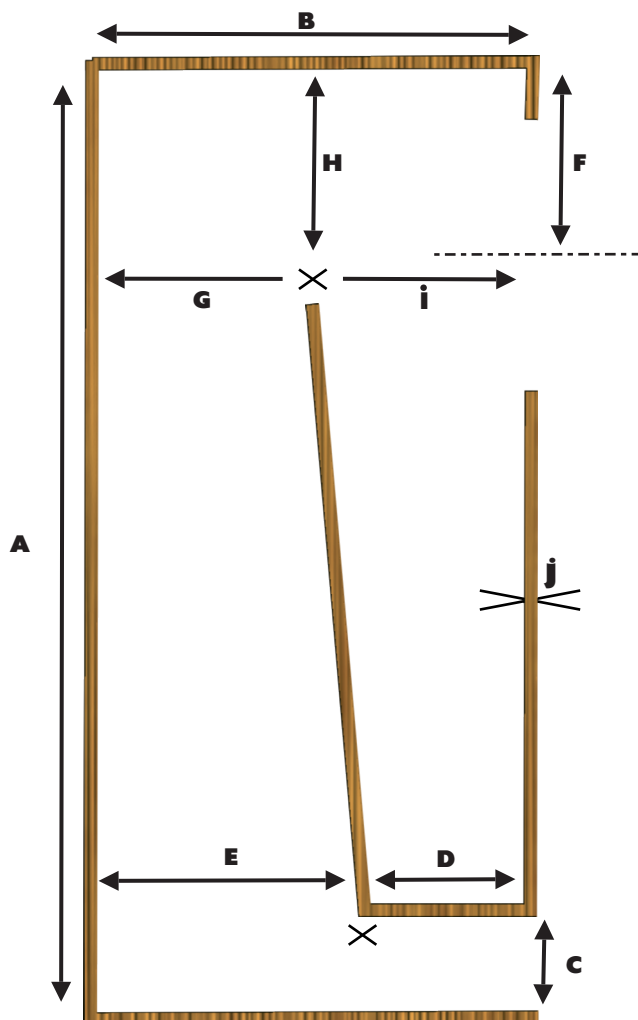

Ref. HP	FR	Largeur Intérieure	A	B	C	D	E	F	G/H/I	J	Poids de laine gr
LB5	52	12	90	16,5	5	6,5	8,5	8	7,5	1,5	300
LB6	48	14	90	19.5	6	8	10.5	8	9	1,5	400
LB7	42	16,5	102	25.5	8,5	10.5	13.5	10	12	1,5	600
LB8	41	21	105	28	11	12.5	14.7	12	13,1	1,8	800
LB12	39	32	110	46.2	18,5	18	26	16	22	2,2	1200

Côtes intérieures en cm. Poids de laine à déterminer expérimentalement

ElectroMagnet Speaker

15, rue Charles Richet 34500 BEZIERS FRANCE

Tel/Fax : (33) 04 67 30 68 29 Tél. : 09 63 46 63 61 Portable : 06 09 08 50 80

www.emspeaker.com