




# Service Manual

# 1959 LINCOLN TRAVEL TUNER

Bendix Model  
R95BH

Serial No. Prefix  
95BH

Lincoln Part No. B9 FL-15801-A, B  
FFC-19061-B

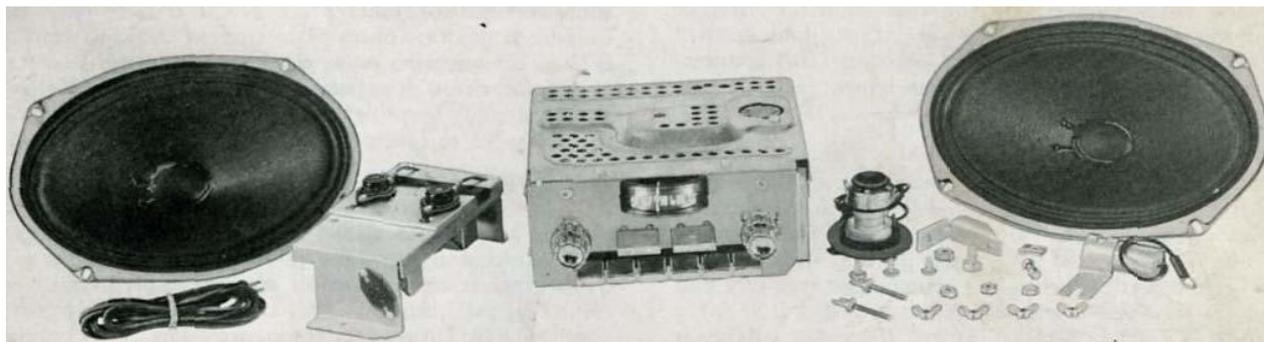

## GENERAL INFORMATION

**TYPE:**--The 1959 Bendix-Lincoln Travel-Tuner Radio is an advanced design superheterodyne receiver with transistor output and five miniature tubes. Tube plate power is supplied by the automobile storage battery.

**TUNING RANGE:** -- 540-1600 kc/s. -- IF 262.5 kc/s.

**POWER INPUT:** -- 12 volt storage battery. Rating 14.4 VDC at 1.5 amperes, with 1 watt audio output.

**AUDIO OUTPUT:** -- 8 watts -10% maximum distortion.

**TUBE COMPLEMENT:** -- 12CX6 r-f amp., 12AD6 conv., 12CN5 i-f amp., 12J8 det.-avc-a-f amp.-relay amp., 12U7 a-f trigger amp.

**TRANSISTORS:** --Two Bendix 2090056-6 (2N399) Power Transistors -- Class B Output Amplifier.

## TO SET PUSHBUTTONS

The 1959 Bendix-Lincoln Travel-Tuner radio is equipped with a tuner incorporating five pushbuttons for automatic station selection and one OFF pushbutton. To set the pushbuttons proceed as follows:

1. Press any one of the five station selector pushbuttons to release the OFF button and start the set operating. Allow the radio to operate for several minutes so that it reaches full operating temperature before setting the station selector pushbuttons.
2. Use the manual tuning knob to tune in a desired station. Be careful to tune exactly on the station.
3. Pull out the first pushbutton to be set to unlock the mechanism. Then press the pushbutton in firmly to set and lock it on the station selected.

**BENDIX RADIO DIVISION • BENDIX AVIATION CORPORATION**

Automotive Products Department • Baltimore 4, Md.

Part No. 2090950-5

Price 35 cents

Printed in U.S.A. 9-58

