


F SERIES

W3-881SI

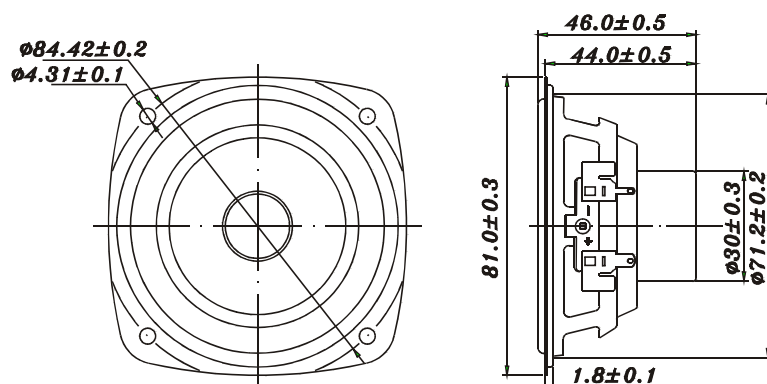

- NEODYMIUM MAGNET DESIGN
- HIGH POWER LOADING DESIGN
- FULL RANGE FREQUENCY RESPONSE
- STAMPED STEEL BASKET
- PPM. CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELDED

3" NEODYMIUM FULL RANGE



DIAPHRAGM MTL	Natural color PPM
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.6 Ω
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	100 - 20K Hz
FREE AIR RESONANCE	100 Hz
VOICE COIL DIAMETER	20 mm
AIR GAP HEIGHT	6.0 mm
RATED POWER INPUT	12 W
MAXIMUM POWER INPUT	25 W
FORCE FACTOR, BL	3.51 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	2 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1302 MN ⁻¹
EFFECTIVE PISTON AREA	0.0032 M ²
Levc	0.086 mH
Zo	46 ohm
X-max	0.25 mm
Vas	1.89 Litr
Qts	0.59
Qms	4.93
Qes	0.67

TB SPEAKERS

P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN
VOICE 886.2.26570282 FAX 886.2.26580166
E-MAIL : INFO@TB-SPEAKER.COM