



Electro-Voice®
 a MARK IV company

Model HP640 Constant-Directivity Horn

SPECIFICATIONS

The following specifications are in accordance with or exceed the AES Recommended Practice for Specification of Loudspeaker Components Used in Professional Audio and Sound Reinforcement Systems (AES2-1984; ANSI S4.26-1984).

Horizontal Beamwidth:

60° (+10°, -10°)
 (-6 dB, 500 Hz to 20 kHz)

Vertical Beamwidth:

40° (+20°, -10°)
 (-6 dB, 1.5 kHz to 20 kHz)

Directivity Factor R_θ (Q):

20.6 (average 1.25 kHz to 20 kHz)

Directivity Index D_i :

13.1 dB (+1.9, -5)
 10 log R_θ , (average 1.25 kHz to 20 kHz)

Usable Lower Frequency Limit:

400 Hz

Construction:

Polyester resin and glass-fiber laminate integrally molded to a die-cast zinc throat section. This hybrid construction assures a rigid driver mount, accurate, loss-free throat-wave transmission and low total weight compared to horns of similar size.

Mechanical Connection of Driver:

Bolt on; standard 2"-diameter throat, 5"-diameter mounting flange and four clearance holes for 1/4" bolts on a 4"-diameter bolt circle.

Recommended Drivers:

DH1
 DH2

Dimensions:

71.1 cm (28.0 in.)
 33.0 cm (13.0 in.)
 43.7 cm (17.2 in.)

Weight:

4.3 kg (9.5 lb)

Shipping Weight:

5.9 kg (13.0 lb)

DESCRIPTION

The Electro-Voice model HP640 is a wide-range, flat-front, high-frequency, constant-directivity horn. It offers economy of space, where its geometry is "just big enough for the job". A horizontal angle is controlled over a frequency range of 500 Hz to 20 kHz and the vertical angle is controlled from 1.5 kHz to 20 kHz, both with unusual precision and adherence to the intended angle. Furthermore, excellent loading is maintained to a low frequency of 400 Hz. The HP horn¹ series represents the latest development in "CD" horn design, employing the same principles which EV engineers developed and used to design the world's first true constant-directivity horns in 1974. The flat-front design makes the HP640 suitable for all modern boxed and clustered systems. A unique, lightweight, integral fiberglass-and-zinc construction gives acoustical and mechanical advantages (see Construction section). Lastly, a special vaned waveguide throat detail gives the HP640 unusually good high-frequency control, vertically, when compared to similar 2-inch-throat horn designs.

1. Patent pending.

R_θ and D_i vs Frequency
 (one-third-octave bandwidths)

Freq. (Hz)	R_θ	D_i (dB)	Freq. (Hz)	R_θ	D_i (dB)
500	8.3	9.2	4,000	18.0	12.6
630	10.4	10.2	5,000	18.9	12.8
800	13.1	11.2	6,300	19.9	13.0
1,000	17.2	12.4	8,000	23.1	13.6
1,250	20.1	13.0	10,000	23.1	13.6
1,600	18.6	12.7	12,000	17.3	12.4
2,000	18.6	12.7	16,000	18.6	12.7
2,500	19.6	12.9	20,000	31.9	15.0
3,100	20.5	13.1			

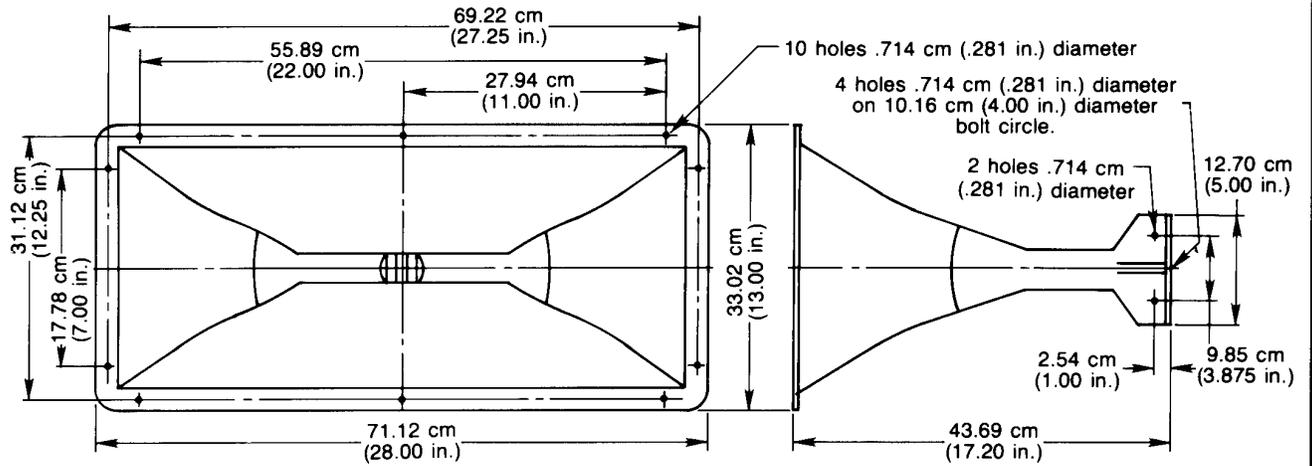


FIGURE 1 — Dimensions

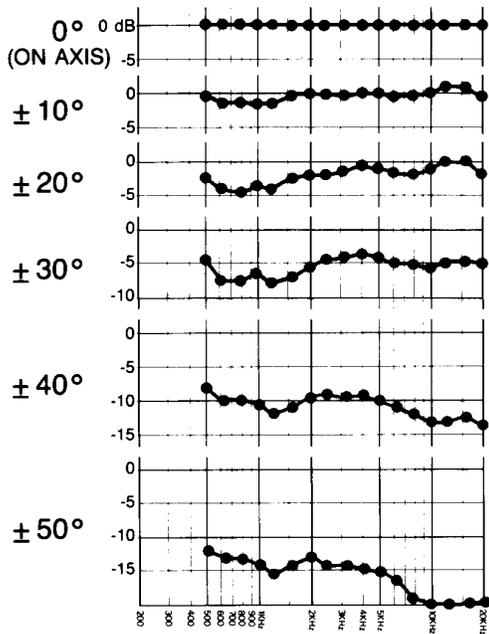


FIGURE 2
Horizontal Off-Axis Response

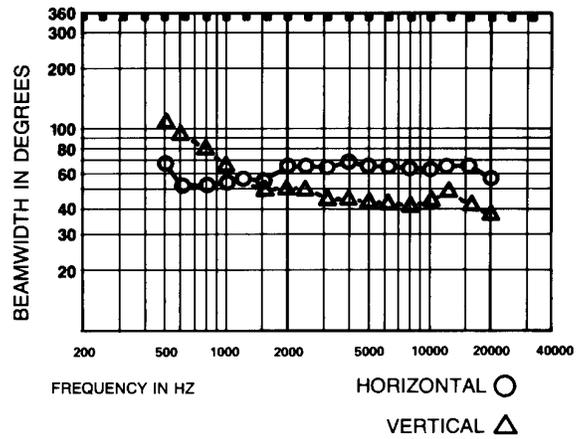


FIGURE 4
6-dB-Down Beamwidth versus Frequency

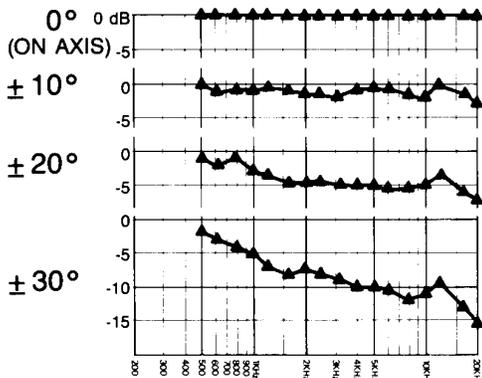


FIGURE 3
Vertical Off-Axis Response


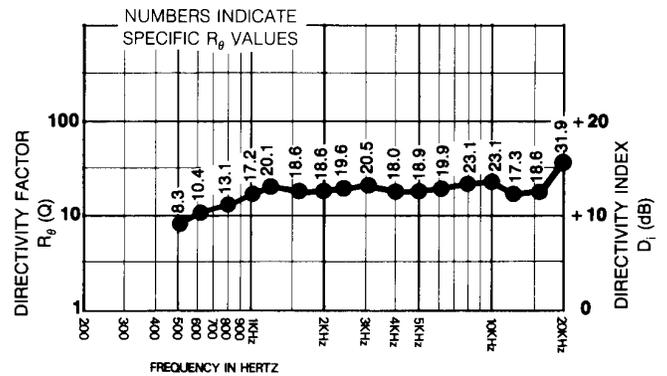


FIGURE 5
Directivity versus Frequency

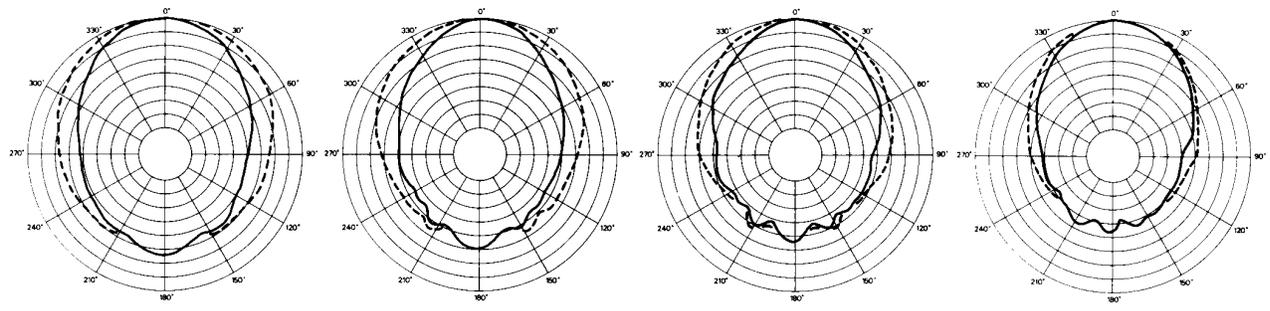


500Hz

630Hz

800Hz

1kHz

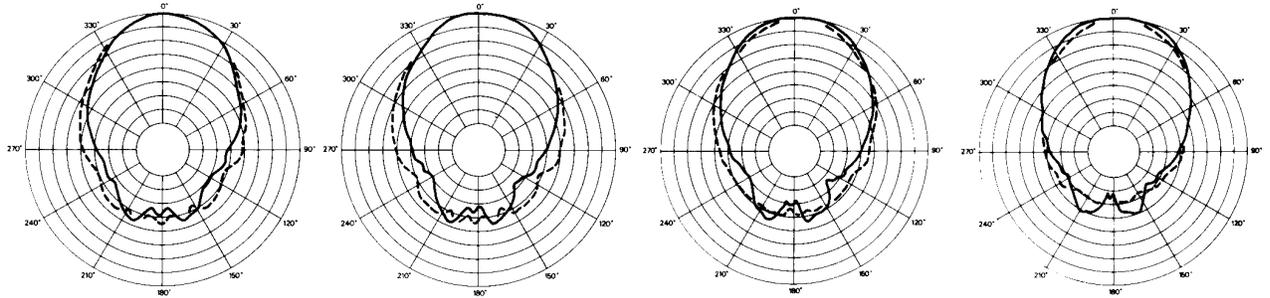


1.25kHz

1.6kHz

2kHz

2.5kHz

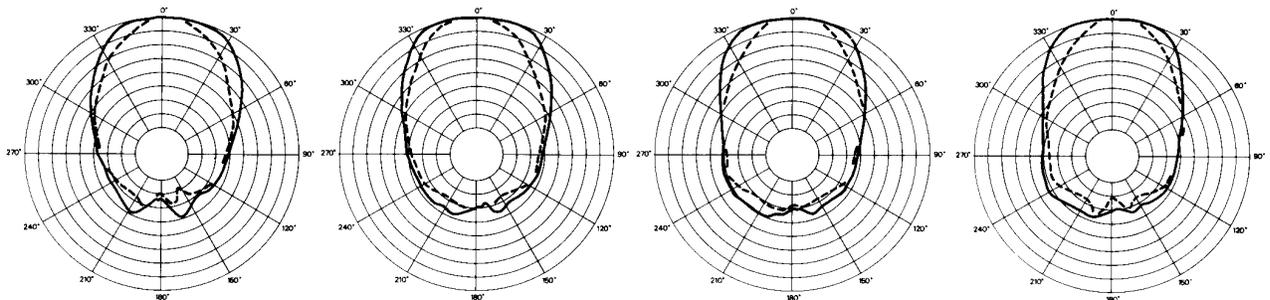


3.15kHz

4kHz

5kHz

6.3kHz

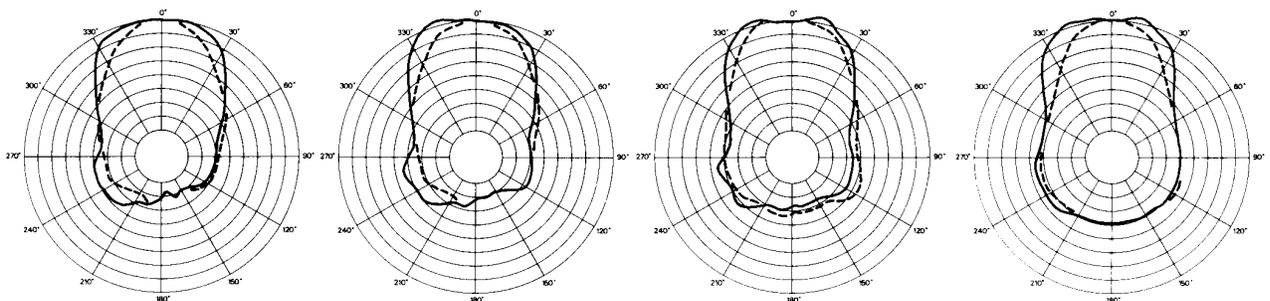

8kHz

10kHz

12.5kHz

16kHz

Scale is 5dB per division

HORIZONTAL ———

VERTICAL - - - -

FIGURE 6 — Polars

A plot of the HP640's 6-dB-down total included beamwidth angle is shown in Figure 4 for each one-third-octave center frequency. The horizontal beamwidth is maintained at 60° (+10°, -10°) over the range 500 Hz to 20 kHz. Vertical beamwidth control occurs only above 1.5 kHz because of the relatively short vertical dimension of the horn's mouth.

FREQUENCY RESPONSE ON AND OFF AXIS

The one-third-octave frequency response of the HP640 at various on- and off-axis angles, was derived from the accompanying polars and is displayed in Figure 2 and Figure 3. All curves are referenced to the on-axis level. These responses illustrate the curves one would get with a real-time spectrum analyzer at the different angles if the horn/driver were equalized flat on axis, in an anechoic environment.

POLAR RESPONSE

The directional characteristics of the HP640 with driver attached were measured by running a set of horizontal/vertical polar responses, in EV's large anechoic chamber, at each one-third-octave center frequency. The test signal was one-third-octave pseudo-random pink noise (1.0 Hz repetition rate)

display the results of these tests. The center frequency and beamwidth angle are noted on each plot. The top angle at the center on each chart is the horizontal beamwidth (—) and the bottom angle is the vertical beamwidth (---).

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The horn shall be of the constant-directivity type. It shall produce a horizontal beamwidth (6-dB-down angle) of 60 degrees, deviating no more than 20 degrees from this angle over the frequency range 500 to 20,000 Hz. It shall produce a vertical beamwidth of 40 degrees, deviating no more than 10 degrees from this angle over the frequency range 1,500 to 20,000 Hz. In addition, it shall provide useful acoustic loading at all frequencies above 400 Hz.

The horn shall be of hybrid fiberglass-and-zinc construction. The driver-mounting flange and initial throat section shall be constructed of die-cast zinc and shall be integrally laminated into the fiberglass portion of the horn.

The horn shall possess a throat of 4.92-cm (1.94-in.) diameter and its flange shall be provided with four ¼-20-clearance bolt holes on a 10.2-cm (4.0-in.) circle for the mounting of the compression driver. The horn shall be

(at our option) without charge for materials or labor if delivered prepaid to the proper Electro-Voice service facility. Unit will be returned prepaid. Warranty does not extend to finish, appearance items, burned coils, or malfunction due to abuse or operation under other than specified conditions, including cone and/or coil damage resulting from improperly designed enclosures, nor does it extend to incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. Repair by other than Electro-Voice or its authorized service agencies will void this guarantee. A list of authorized warranty service agencies is available from Electro-Voice, Inc., 600 Cecil Street, Buchanan, MI 49107 (AC/616-695-6831); or Electro-Voice West, 8234 Doe Avenue, Visalia, CA 93291 (AC/209-651-7777). This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

5

Service and repair address for this product: Electro-Voice, Inc., 600 Cecil Street, Buchanan, Michigan 49107.

Specifications subject to change without notice.



ELECTRO-VOICE, INC., 600 Cecil Street, Buchanan, Michigan 49107

MANUFACTURING PLANTS AT ■ BUCHANAN, MI ■ NEWPORT, TN ■ SEVIERVILLE, TN ■ OKLAHOMA CITY, OK ■ GANANOQUE, ONT.
©Electro-Voice Inc. 1991 ■ Litho in U.S.A. Part Number 530631-615

a MARK IV company