

RightMark Audio Analyzer test report


Testing device	Project Head Box 2 DT990 Pro
Sampling mode	24-bit, 44 kHz
Interface	
Testing chain	External loopback (line-out - line-in)
RMAA Version	6.4.5

20 Hz - 20 kHz filter	ON
Normalize amplitude	ON
Level change	-0.4 dB / -0.4 dB
Mono mode	OFF
Calibration singal, Hz	1000
Polarity	correct/correct


Summary

Frequency response (from 40 Hz to 15 kHz), dB	+0.08, -0.12	Very good
Noise level, dB (A)	-103.5	Excellent
Dynamic range, dB (A)	100.6	Excellent
THD, %	0.00058	Excellent
THD + Noise, dB (A)	-95.2	Excellent
IMD + Noise, %	0.00521	Excellent
Stereo crosstalk, dB	-88.2	Excellent
IMD at 10 kHz, %	0.00284	Excellent
General performance		Very good


Frequency response

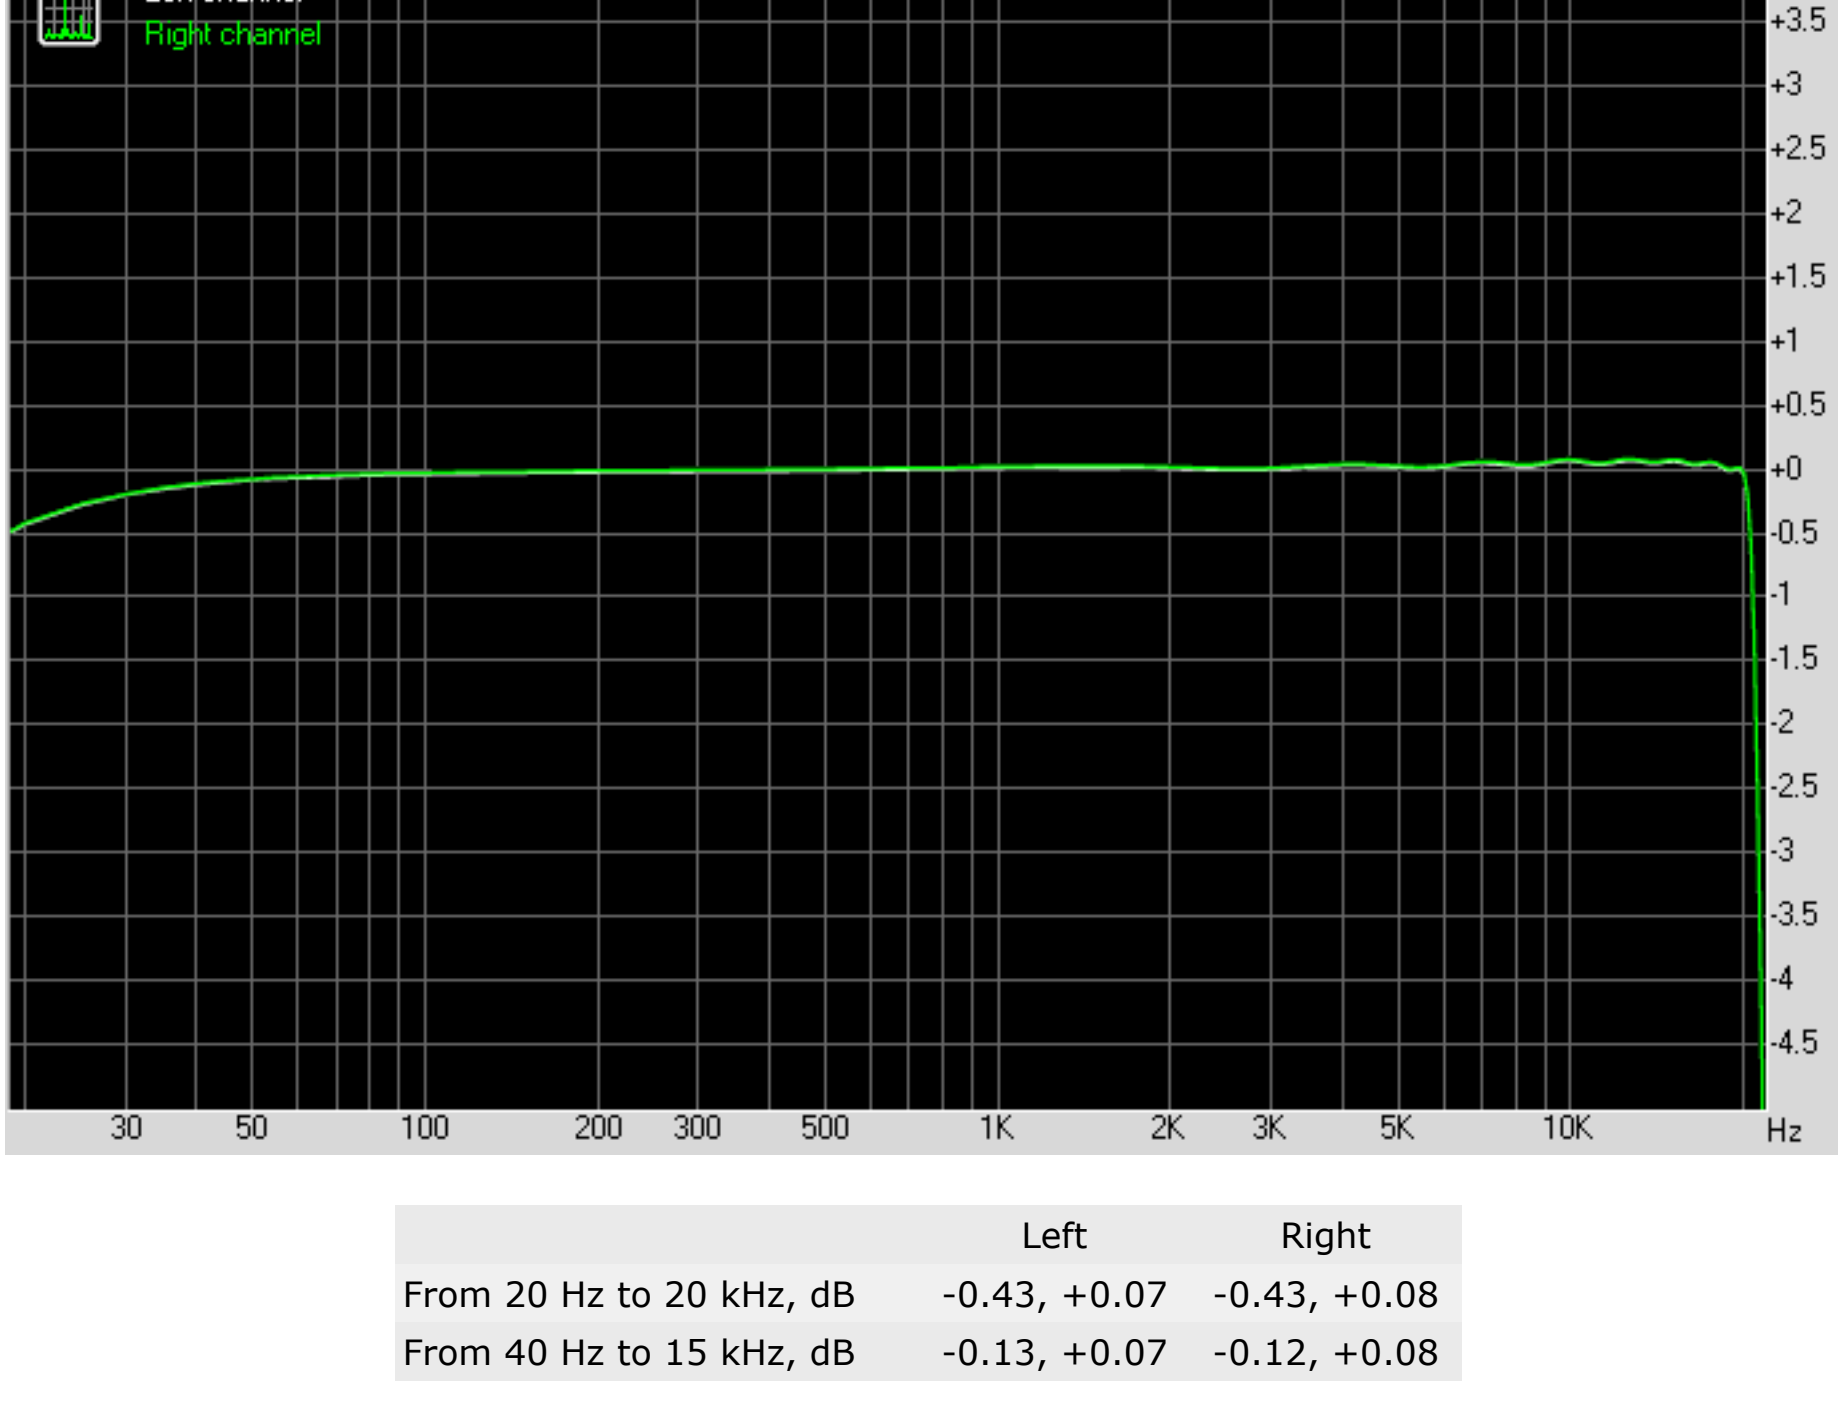


Noise level

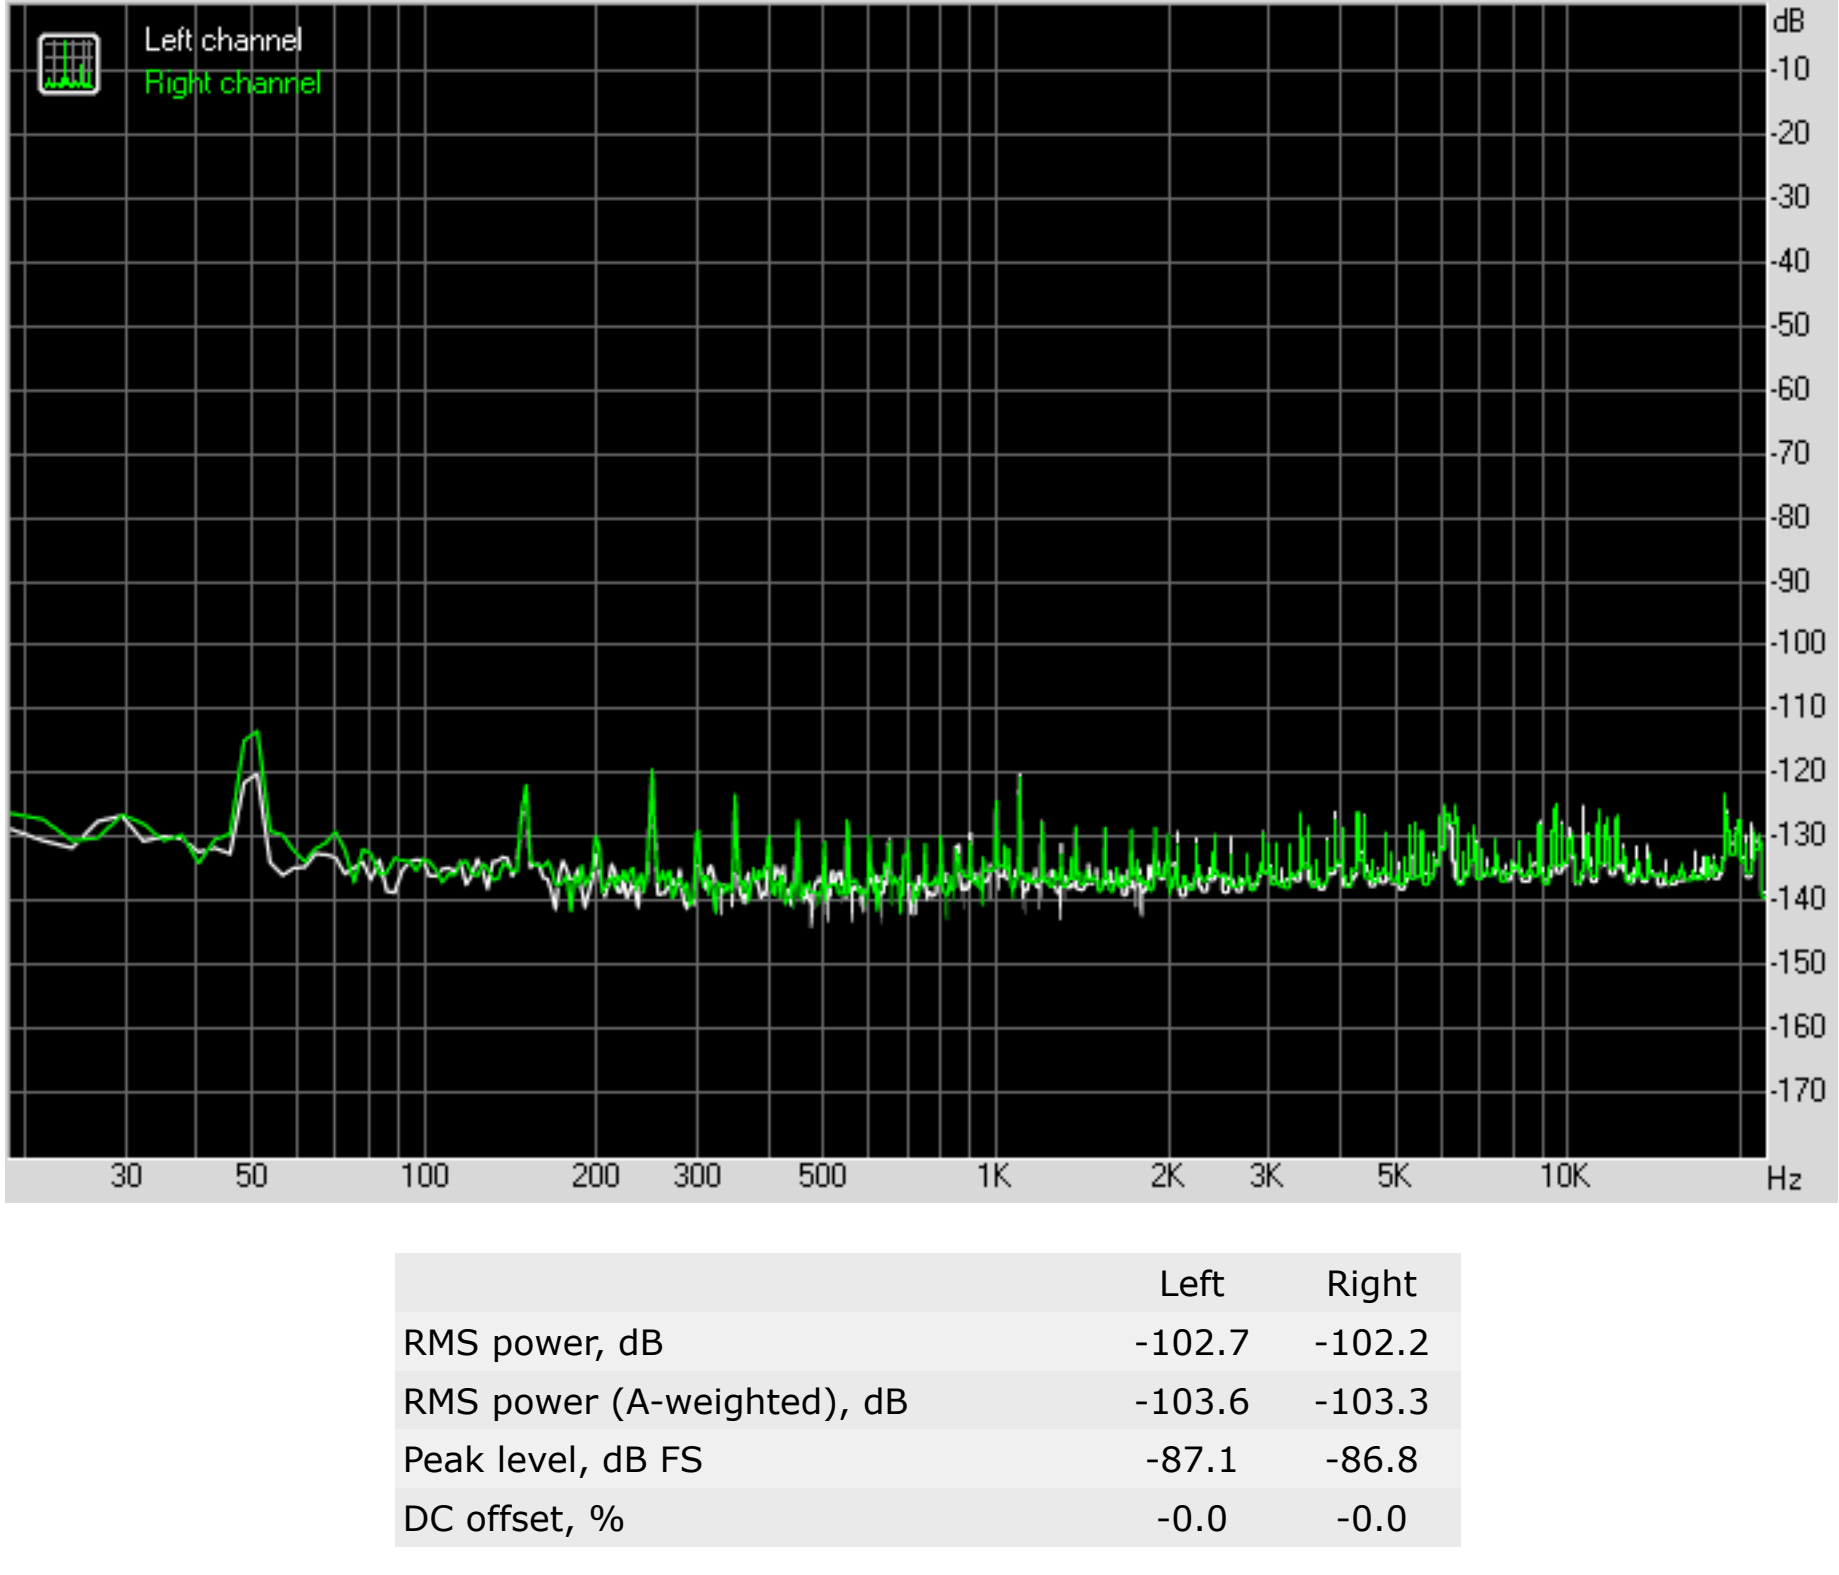


Dynamic range

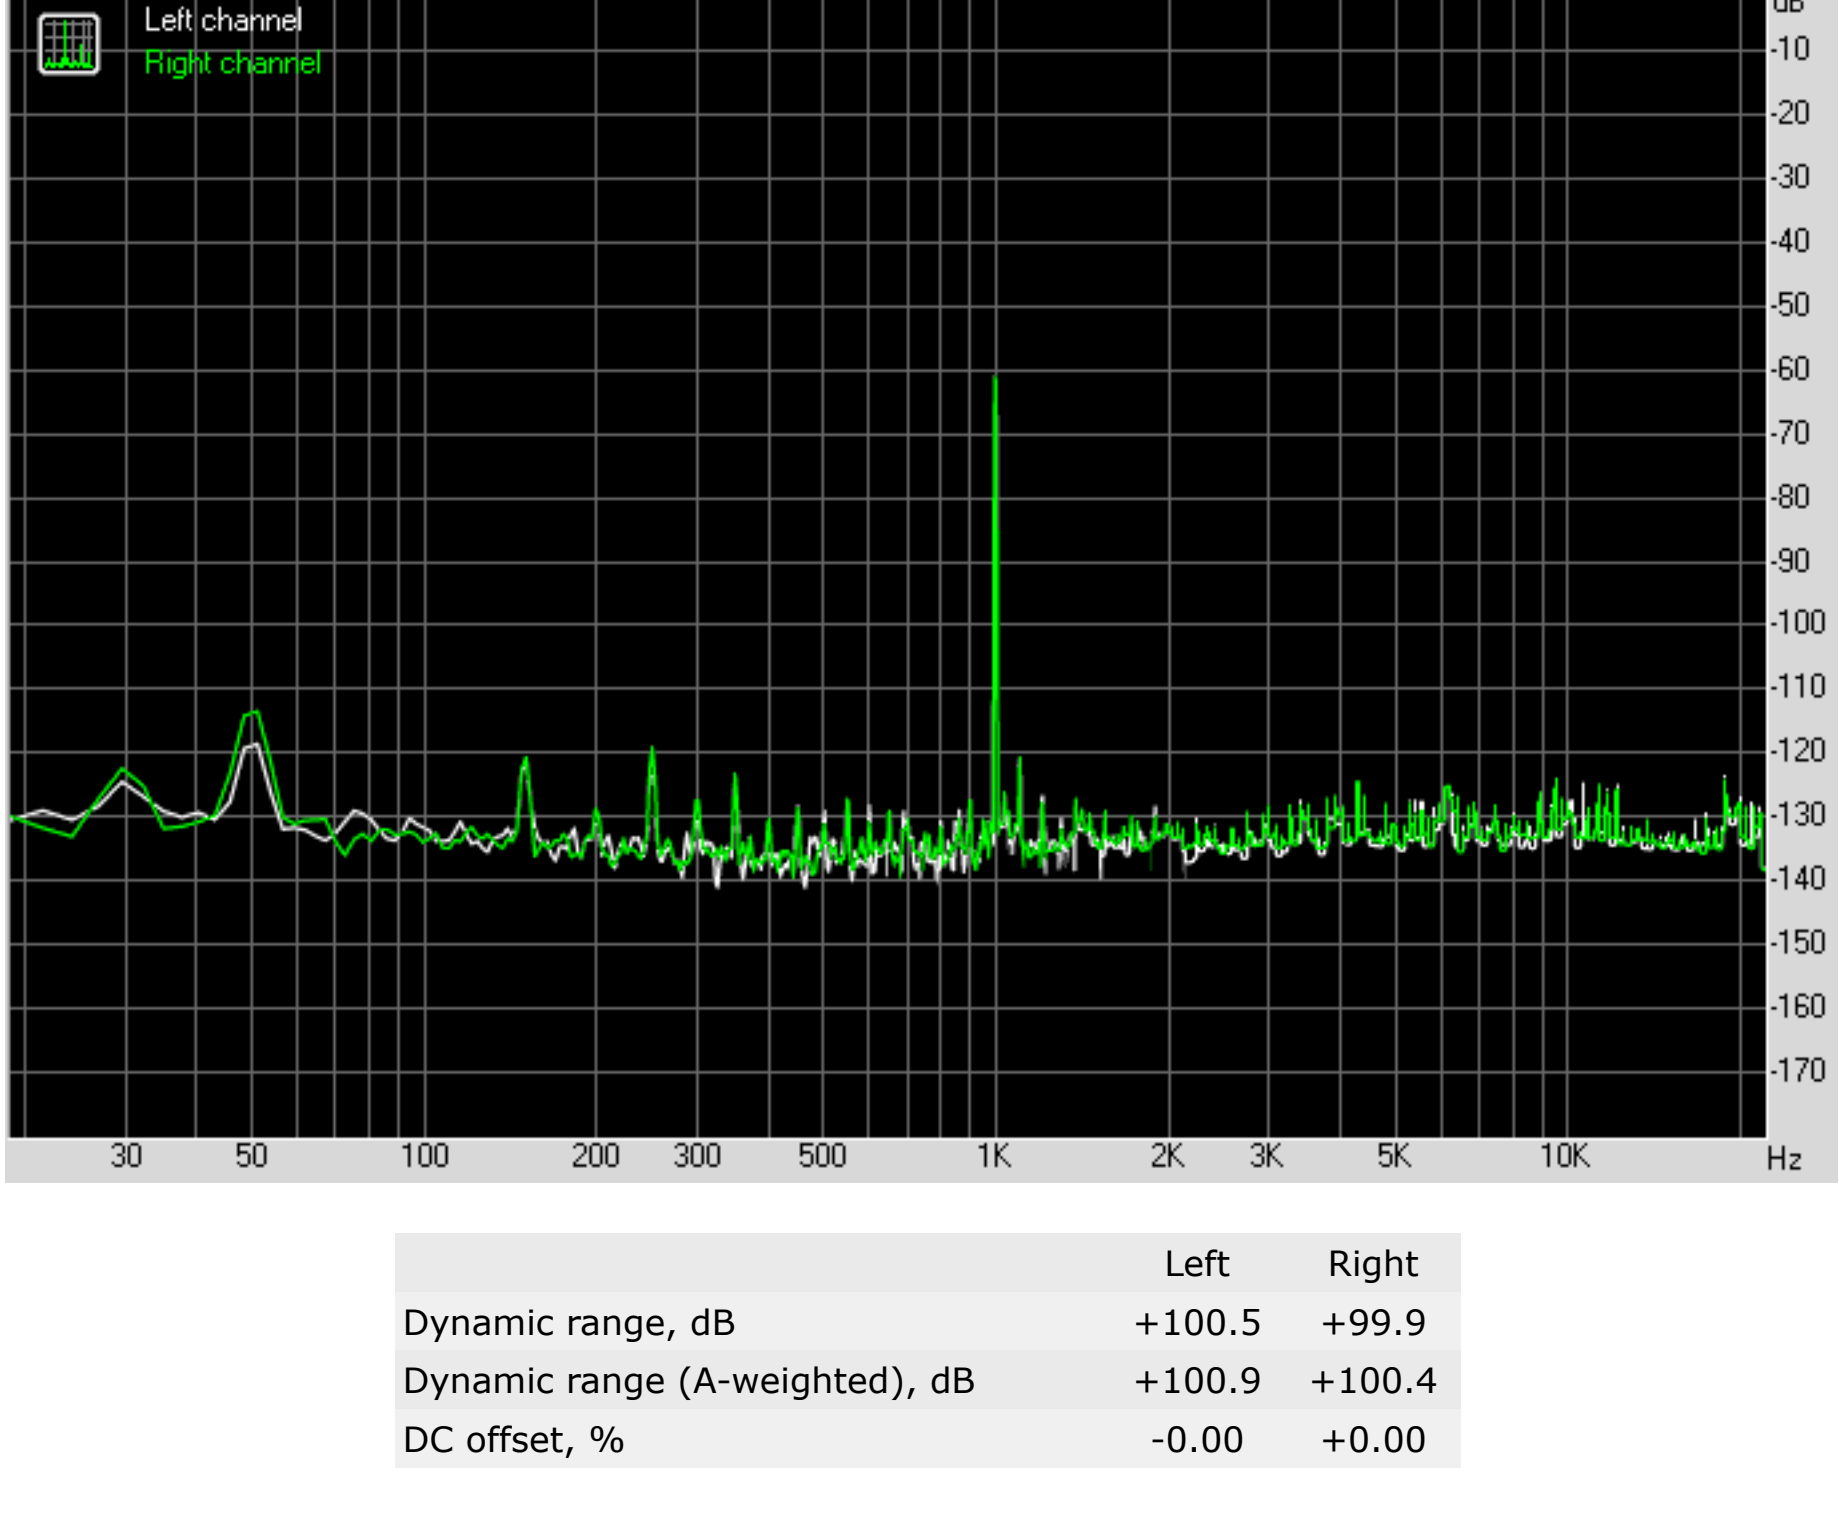


THD + Noise (at -3 dB FS)

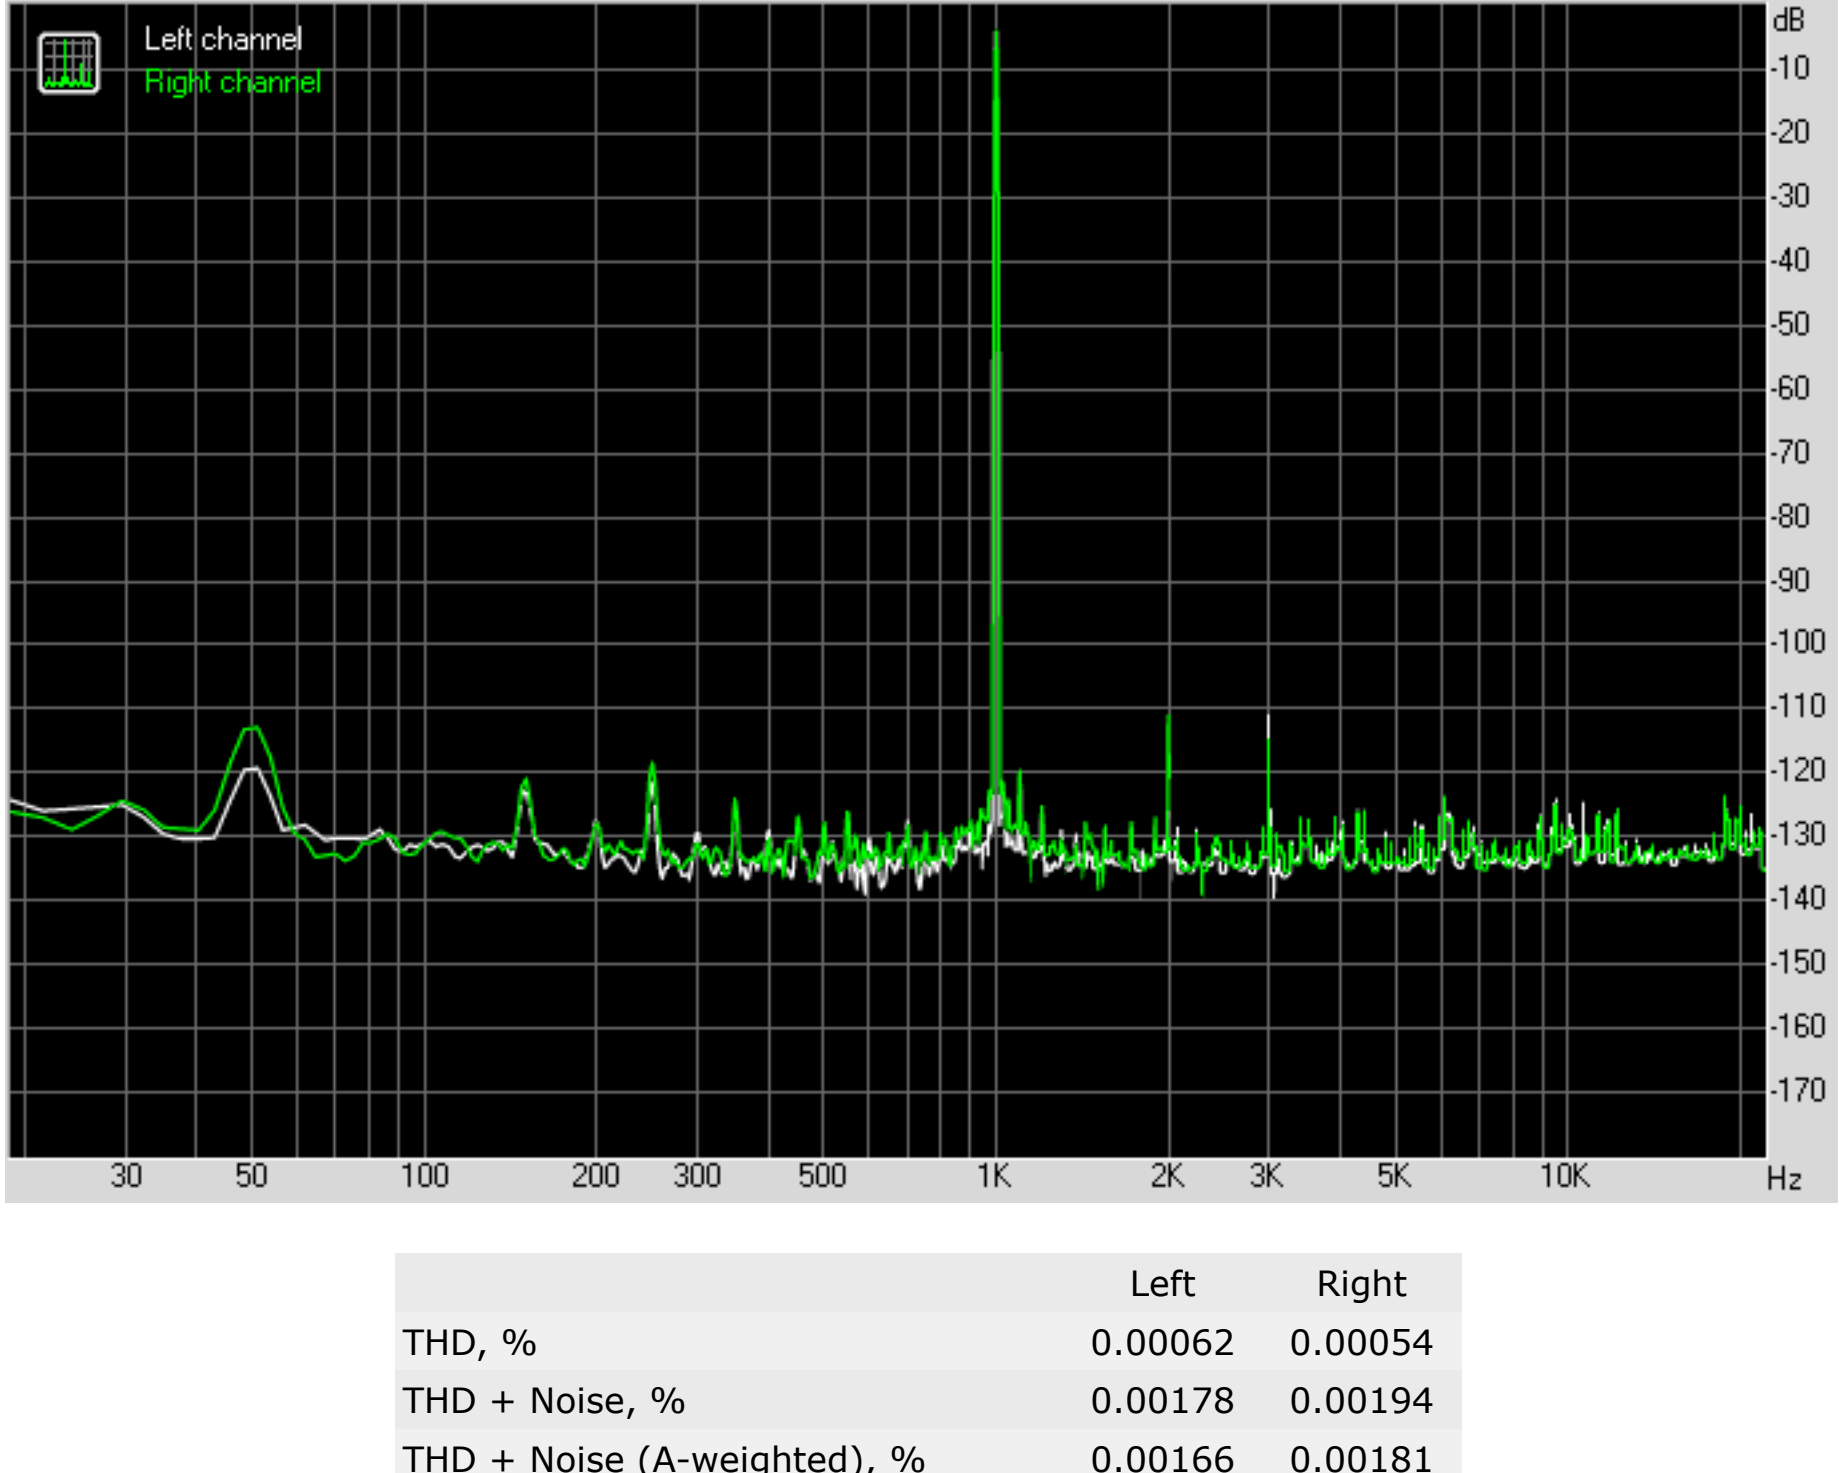

Intermodulation distortion

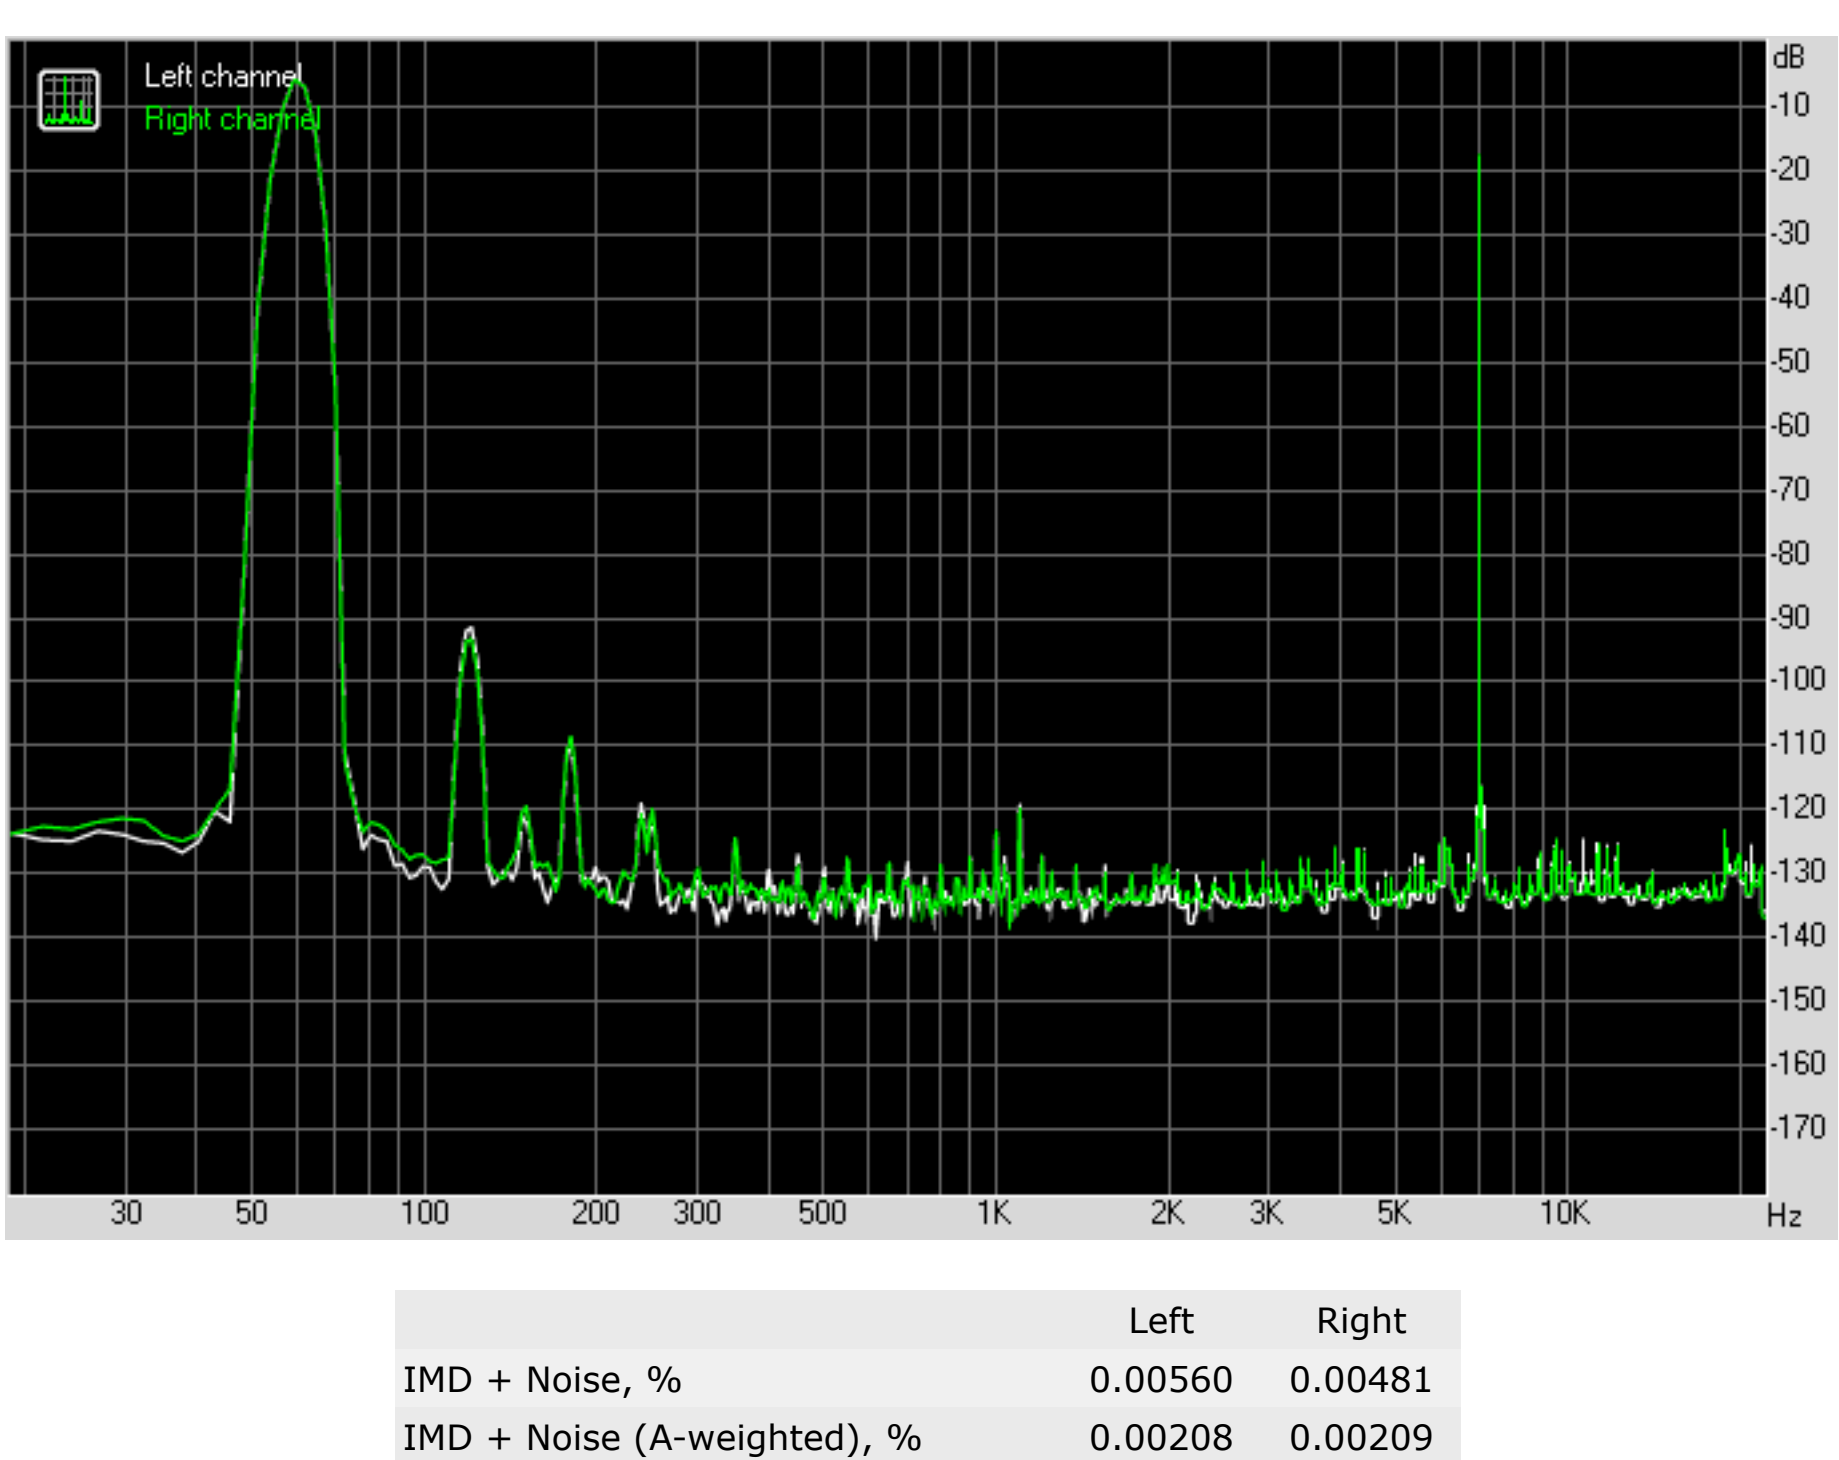

Stereo crosstalk

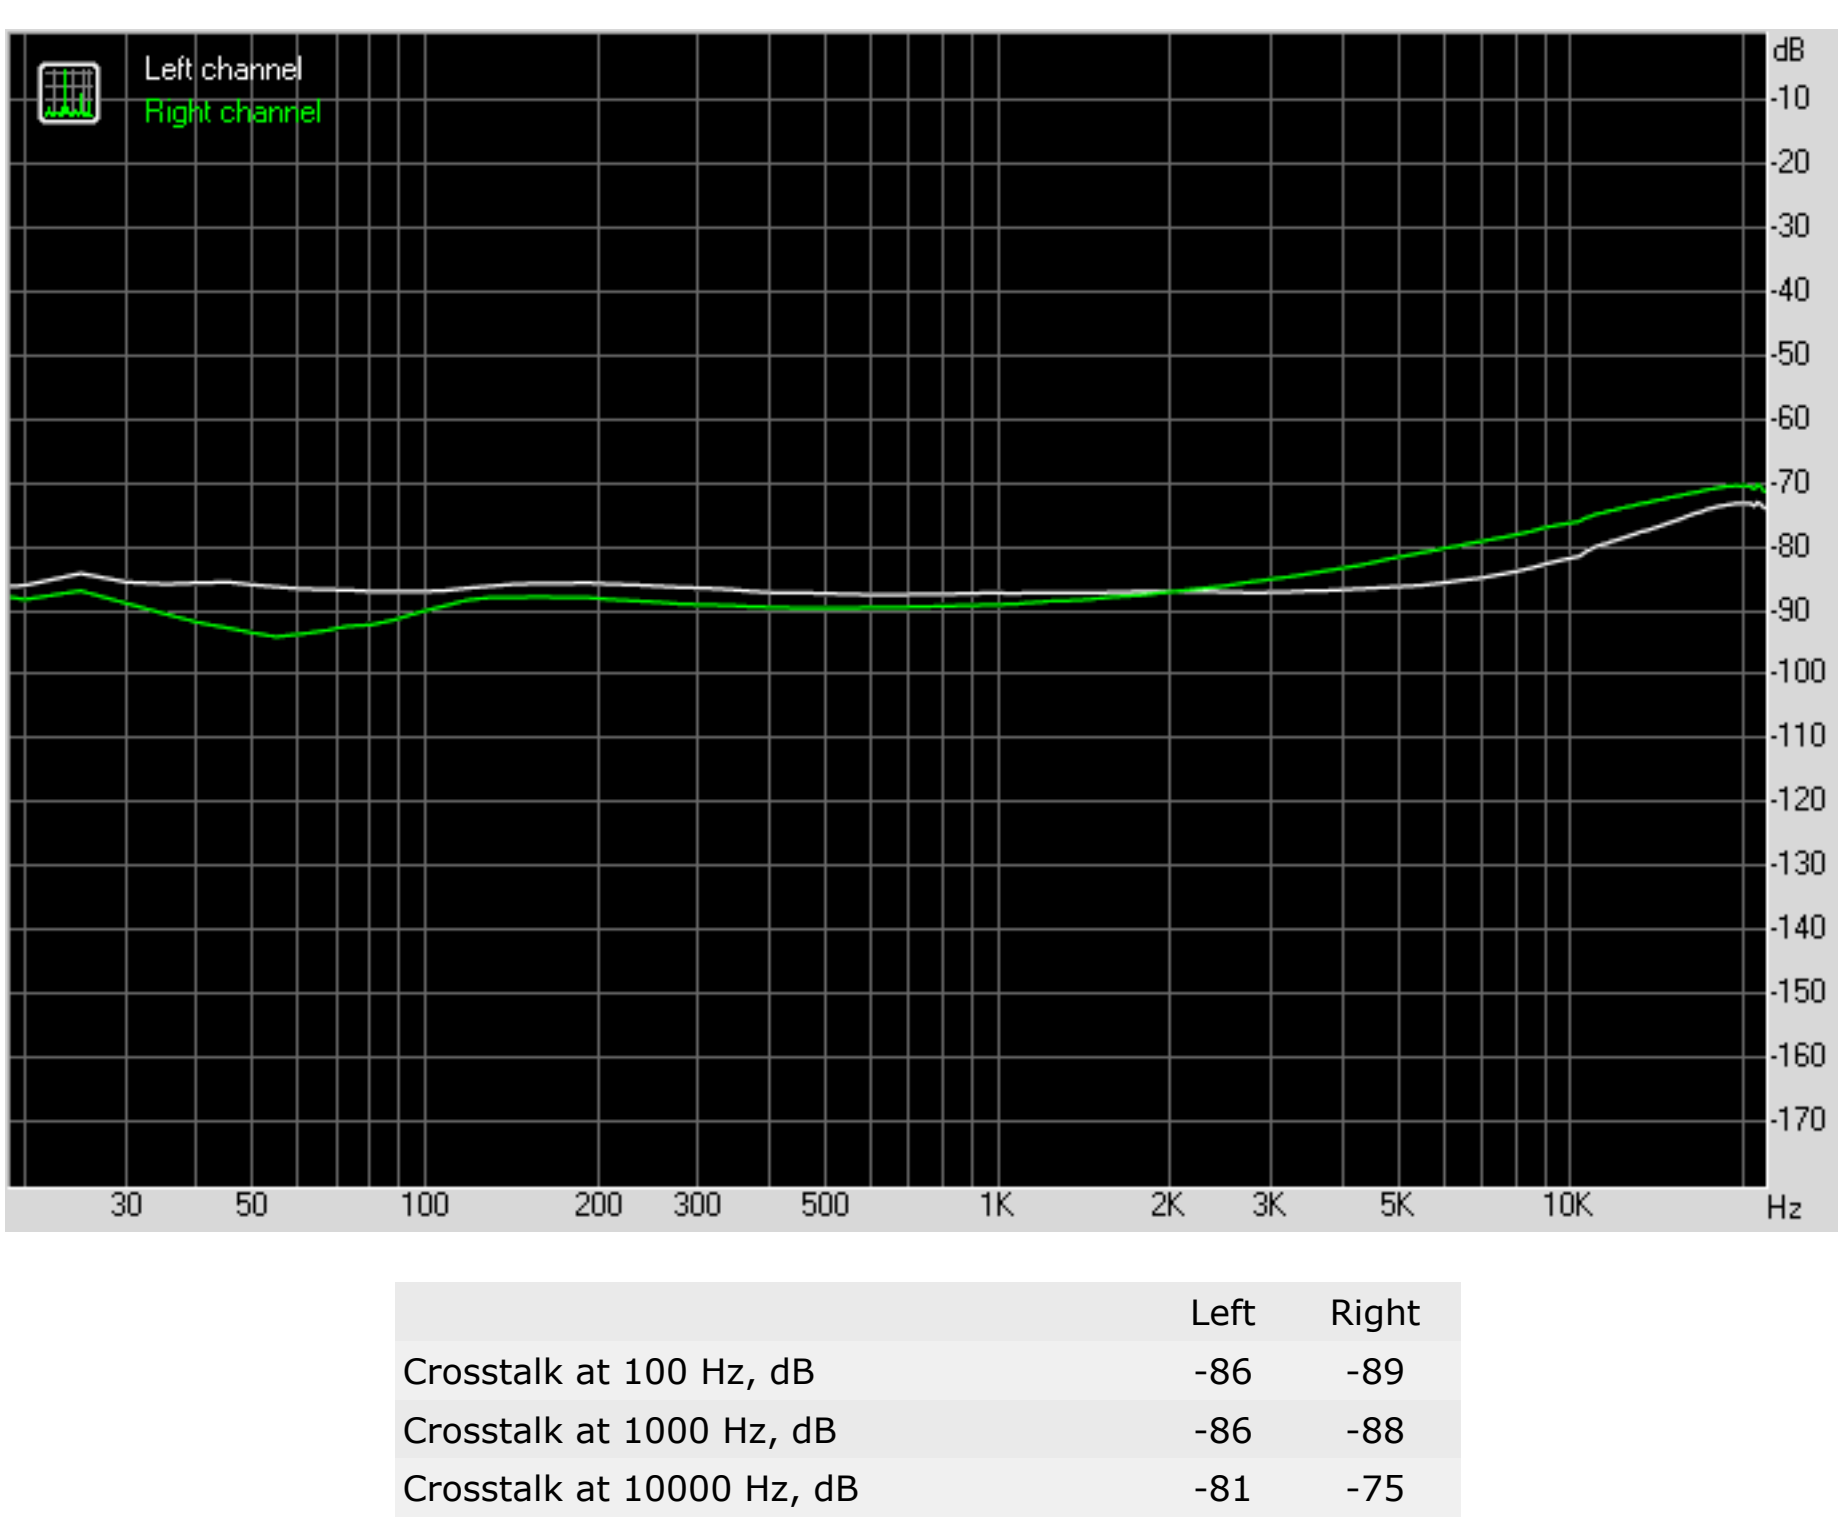

IMD (swept tones)

