




Notes:

21" – PA woofer,  
oil coated paper cone,  
air dried oil coated paper  
dustcap, treated roll out  
cloth edge, foam gasket,  
vented voice coil,  
aluminium flat wire VC,  
diecast frame,  
terminals:  
„+“ 4.8 x 0.8 mm  
„-“ 2.8 x 0.8 mm

impedance:	8 $\Omega$
nom. power:	600 watts
SPL 1W/1m:	97 dB
fs:	24.3 Hz
Re:	6.7 $\Omega$
Le:	2.8 mH
Qms:	11.3
Qes:	0.3
Qts:	0.3
VAS :	547 l
Mms :	298 g
Rms :	4.4 kg/s
Cms:	0.14 mm/N
B*I:	30 Tm
Sd:	1640 cm <sup>2</sup>
Xmax:	+/- 8 mm
weight:	-- kg
magnet:	-- oz
voice coil Ø:	100 mm

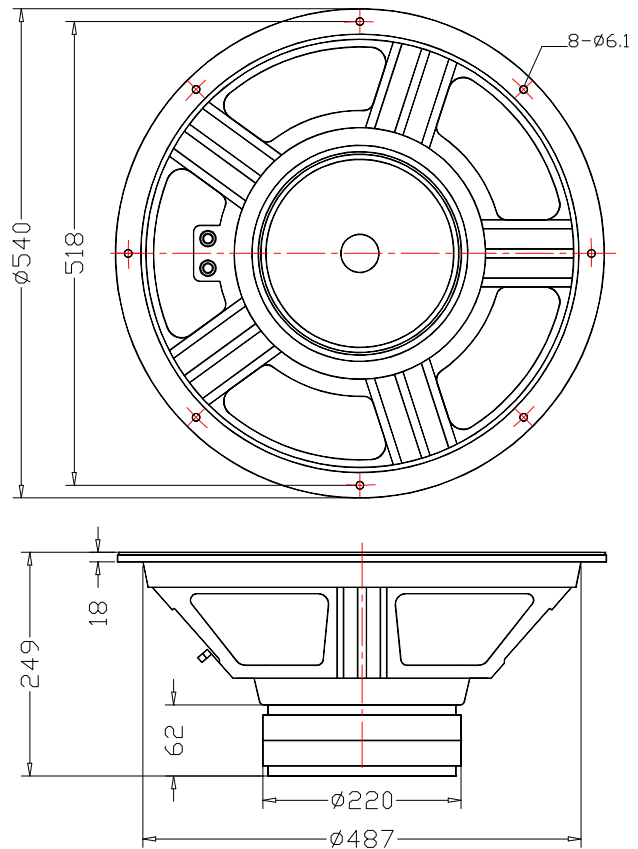

TECHNICAL DATA ARE MEASURED WITH ATB – EQUIPMENT ACCORDING EN – 60268 –5.

FOR PRODUCT IMPROVEMENT HKM RESERVES ALTERATIONS IN SPECIFICATIONS AND DESIGN WITHOUT FURTHER ANNOUNCEMENT

FOR TOLERANCES OF TECHNICAL DATA REFER TO HKM 'S MANUAL OF TECHNICAL DATA

FOR INFORMATION CONTACT: TEL.: +49 9073 / 9585 0, FAX.: +49 9073 / 9585 55, E-MAIL: [INFO@HKM-GROUP.DE](mailto:INFO@HKM-GROUP.DE)

[WWW.HKM-GROUP.DE](http://WWW.HKM-GROUP.DE)